5-4120-370-24P

TECHNICAL MANUAL

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

AIR CONDITIONER, VERTICAL COMPACT, 36,000 BTU/HR COOLING 28,600 BTU/HR HEATING 208 VOLT, 3 PHASE, 400 HERTZ 4120-01-110-2034

This copy is a reprint which includes current pages from Change 1.

HEADQUARTERS, DEPARTMENT OF THE ARMY

3 FEBRUARY 1984

D 101.11:

best copy available

TM 5-4120-370-24P
T.O. 35E9-229-4
C 1

CHANGE NO. 1

HEADQUARTERS
DEPARTMENTS OF THE ARMY
AND THE AIR FORCE
WASHINGTON, D.C., *30 January 1987*

Organizational, Direct Support, and
General Support Maintenance
Repair Parts and Special Tools List
For
AIR CONDITIONER, VERTICAL COMPACT,
36,000 BTU/HR COOLING
28,600 BTU/HR HEATING
208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2S 4120-01-110-2034
208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2SA 4120-01-222-9310
208 VOLT, 3 PHASE, 50/60 HERTZ
KECO MODEL F36T-2S 4120-01-222-6438

TM 5-4120-370-24P, 3 February 1984, is changed as follows:

1. Air Force T.O. 35E9-229-4, is being added to this manual.

2. Title is changed as shown above.

3. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
3 and 4	3 and 4
7 and 8	7 and 8
11 and 12	11 and 12
15 through 18	15 through 18
31 and 32	31 and 32
43 through 50	43 through 50
53 and 54	53 and 54
57 through 62	57 through 62
65 and 66	65 and 66
69 and 70	69 and 70

3. Retain this sheet in front of manual for reference purposes.

TM 5-4120-370-24P
T.O. 35E9-229-4
C 1

By Order of the Secretaries of the Army, and the Air Force:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

CHARLES A. GABRIEL, *General USAF*
Chief of Staff

Official:

EARL T. O'LOUGHLIN
General, USAF, Commander, Air Force
Logistics Command

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25A, Organizational, Direct Support and General Support Maintenance requirements for Air Conditioner, Vertical Compact, 36,000 BTU Cool/28,600 BTU Heat, 208V, 400HZ, 3 PH (F36T4-25)

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C. **3 February 1984**

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

AIR CONDITIONER, VERTICAL COMPACT,
36,000 BTU/HR COOLING
28,600 BTU/HR HEATING
208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2S 4120-01-110-2034

208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2SA 4120-01-222-9310

208 VOLT, 3 PHASE, 50/60 HERTZ
KECO MODEL F36T-2S 4120-01-222-6438

Current as of 3 January 1984

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in this back of this manual direct to: Commander, U.S. Army Troop Support Command, ATTN: AMSTR-MCTS, 4300 Goodfellow Boulevard, St. Louis, MO 63120-1798. A reply will be furnished directly to you.

Air Force: Completed AFTO Form 22 (Technical Order Publication Improvement Report and Reply) should be forwarded to: HQ, SA-ALC/MMEDT, Kelly AFB, TX 78241.

			Page	Illustration Figure
SECTION	I	INTRODUCTION	1	
	II	REPAIR PARTS LISTS	7	
Group	01	COVERS, PANELS, GRILLES, SCREENS, AND INFORMATION PLATES	7	
		Right Side and Rear Outside Panels	7	1
		Top, Front, and Left Side Outside Panels	11	2
	02	AIR CIRCULATING AND CONDENSATE DRAIN SYSTEMS	15	
		Filters, Mist Eliminator, and Condensate Trap	15	3
		Fresh Air Damper	17	4
	03	ELECTRICAL	21	
		Control Panel Assembly	21	5
		Block-Off Assembly	25	6
		Wiring Harnesses	27	7
		Junction Box	31	8
		Junction Box Cover and Wiring Harnesses	33	9
		Junction Box Electrical Leads	37	10
		Junction Box RFI Filter	43	11
		Junction Box Internal Parts	45	12
	04	EVAPORATOR FANS, MOTORS AND HEATERS	47	
		Right Evaporator Fan and Motor	47	13
		Left Evaporator Fan and Motor	49	14
		Heaters and Related Parts	51	15

TABLE OF CONTENTS (Cont.)

			Page	Illustration Figure
	05	CONDENSER FANS AND MOTOR	53	
		Condenser Fans and Motors	53	16
	06	REFRIGERATION SYSTEM	55	
		Actuating Cylinders	55	17
		Safety Control Box Assembly	57	18
		Compressor Piping	59	19
		Compressor	61	20
		Evaporator Coil and Piping	65	21
		Condenser Coil and Piping	69	22
	07	CASING AND BASE	73	
		Insulation	73	23
		Casing and Base	75	24
	08	SOUND ATTENUATOR	79	
		Sound Attenuator	79	25
SECTION	III	SPECIAL TOOLS LIST		
	IV	NATIONAL STOCK NUMBER-PART NUMBER INDEX	80	

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

Section I
INTRODUCTION

1. SCOPE

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support, and general support maintenance of the air conditioner. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. GENERAL

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence. Bulk materials are listed in NSN sequence.

b. Section III. Special Tools List. A list of special tools, special TMDE, and other special support equipment authorized for the performance of maintenance.

c. Section IV. National Stock Number and Part Number Index. A list, in National Item Identification Number (NIIN) sequence of all National Stock Numbers (NSN) appearing in the listings, followed by a list in alphanumeric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance. This index is followed by a cross-reference list of reference designators to figure and item numbers.

3. EXPLANATION OF COLUMNS

a. Illustration. This column is divided as follows:

(1) Figure Number. Indicates the figure number of the illustration on which the item is shown.

(2) Item Number. The number used to identify item called out in the illustration.

b. Source, Maintenance and Recoverability (SMR) Codes.

(1) Source Code. Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

CODE	DEFINITION
PA	— Item procured and stocked for anticipated or known usage.
PB	— Item procured and stocked for insurance purpose because essentiality dictates that a minimum quantity be available in the supply system.
PC	— Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature.
PD	— Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.
PE	— Support equipment procured and stocked for initial issue or outfitting to specified maintenance repair activities.
PF	— Support equipment which will not be stocked but which will be centrally procured on demand.
PG	— Item procured and stocked to provide for sustained support for the life of the equipment. It is applied to an item peculiar to the equipment which, because of probable discontinuance or shutdown of production facilities, would prove uneconomical to reproduce at a later time.

CODE	DEFINITION
KD	— An item of a depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items required at the time of overhaul or repair.
KF	— An item of a maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance.
KB	— Item included in both a depot overhaul/repair kit and a maintenance kit.
MO	— Item to be manufactured or fabricated at the organizational level.
MF	— Item to be manufactured or fabricated at the direct support maintenance level.
MH	— Item to be manufactured or fabricated at the general support maintenance level.
MD	— Item to be manufactured or fabricated at the depot maintenance level.
AO	— Item to be assembled at organizational level.
AF	— Item to be assembled at direct support maintenance level.
AH	— Item to be assembled at general support maintenance level.
AD	— Item to be assembled at depot maintenance level.
XA	— Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.
XB	— Item is not procured or stocked. If not available through salvage, requisition.
XC	— Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number.
XD	— A support item that is not stocked. When required item will be procured through normal supply channels.

NOTE: Cannibalization or salvage may be used as a souce of supply for any items coded above except those coded XA and support items as restricted by AR 700-42.

(2) Maintenance Code. Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

CODE	APPLICATION/EXPLANATION
C	— Crew or operator maintenance performed within organizational maintenance.
O	— Support item is removed, replaced, used at the organizational level.
F	— Support item is removed, replaced, used at the direct support level.
H	— Support item is removed, replaced, used at the general support level.
D	— Support items that are removed, replaced, used at depot, mobile depot, or specialized repair activity only.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes.

CODE	APPLICATION/EXPLANATION
O	— The lowest maintenance level capable of complete repair of the support item is the organizational level.
F	— The lowest maintenance level capable of complete repair of the support item is the direct support level.
H	— The lowest maintenance level capable of complete repair of the support item is the general support level.
D	— The lowest maintenance level capable of complete repair of the support item is the depot level.
L	— Repair restricted to Specialized Repair Activity.

CODE — APPLICATION/EXPLANATION

Z — Nonreparable. No repair is authorized.

B — No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item.

(3) Recoverability Code. Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code Format as follows:

RECOVERABILITY CODES — DEFINITION

Z — Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.

O — Reparable item. When uneconomically reparable, condemn and dispose at organizational level.

F — Reparable item. When uneconomically reparable, condemn and dispose at the direct support level.

H — Reparable item. When uneconomically reparable, condemn and dispose at the general support level.

D — Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.

L — Reparable item. Repair, condemnation, and disposal not authorized below depot/specialized repair activity level.

A — Item requires special handling or condemnation procedures because of specific reasons (i.e., precious metal content, high dollar value, critical material or hazardous material). Refer to appropriate manuals/directivee for specific instructions.

c. National Stock Number. Indicates the National Stock Number assigned to the item and which will be used for requisitioning.

d. Part Number. Indicates the primay number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE: When a stock numbered item is requisitioned, the item received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item. Items that are included in kits and sets are listed below the name of the kit or set with the quantity of each item in the kit or set indicated in the quantity incorporated in unit column.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc.).

4. SPECIAL INFORMATION

a. Usable on codes are shown in the discription column. Uncoded items are applicable to all models. Identification of the usable on codes used in this publication are:

CODE	Used On
DMD	F36T4-2S
EAZ	F36T4-2SA (Air Force)
EAY	F36T-2S (Air Force)

b. Detailed manufacturing instructions for items source coded to be manufactured or fabricated are found in TM5-4120-370-14. Bulk marerials required to manufacture items are listed in the Bulk Material Group of this manual.

c. Detailed assembly instructions for items source coded to be assembled are found in TM5-4120-370-14. Assembly components are listed immediately following the item to be assembled.

d. Repair parts kits and gasket sets appear as the last entries in the repair listing for the figure in which its parts are listed as repair parts.

e. In the parts list, some items are indented to show that they are a component or components of the item under which they are indented.

f. The following publications pertain to the air conditioner and its components:

Publication and Short Title	
TM5-4120-370-14	Operator's, Organizational, Direct Support, and General Support Maintenance Manual

5. HOW TO LOCATE REPAIR PARTS.

a. When National Stock Number or Part Number is Unknown:

(1) First. Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) Second. Find the illustration covering the functional group to which the item belongs.

(3) Third. Identify the item on the illustration and note the illustration figure and item number of the item.

(4) Fourth. Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National Stock Number or Part Number is Known:

(1) First. Using the Index of National Stock Numbers and Part Numbers, find the pertinent National Stock Number or Part Number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) Second. After finding the figure and item number, locate the figure and item number in the repair parts list.

6. ABBREVIATIONS

Abbreviations	Explanation
AWG	American Wire Gage
IN	Inch
L	Long
LH	Left Hand
MFD	Manufactured
OD	Outside Diameter
RFI	Radio Frequency Interference
RH	Right Hand
RND	Round
SH	Sheet
THK	Thick
W	Wide

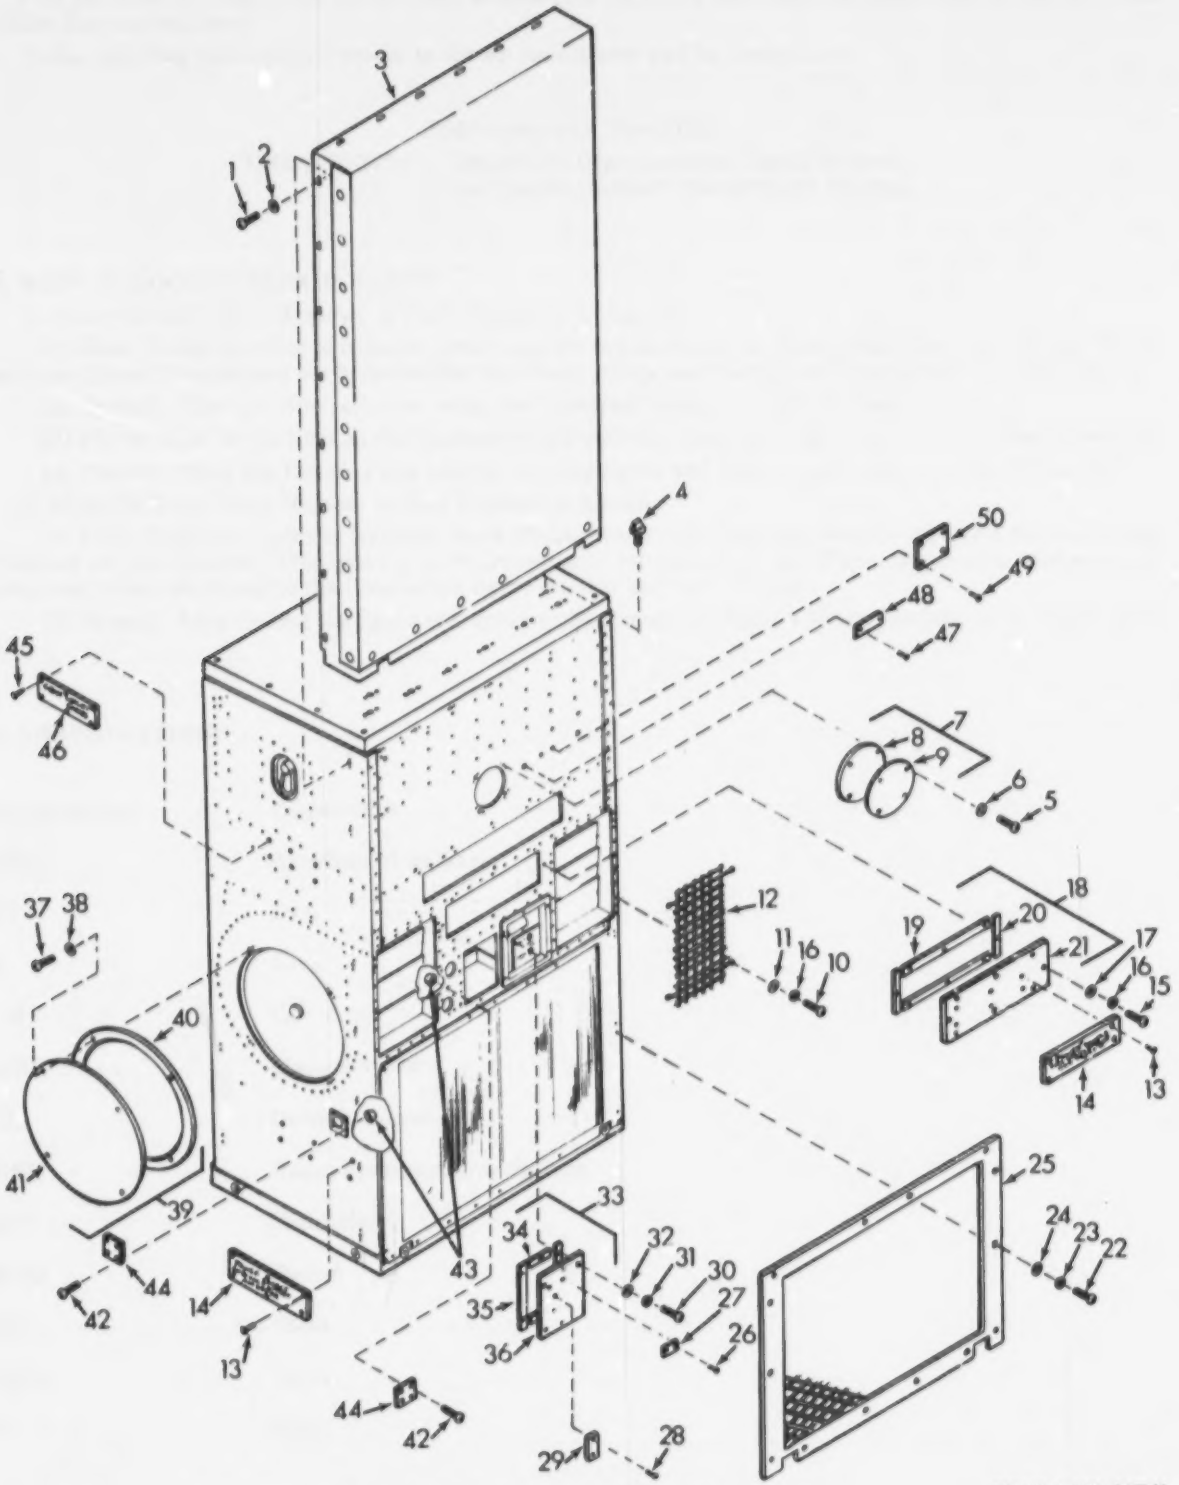

TS4120-370-24P/1

Figure 1. Right Side and Rear Outside Panels

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 01 COVERS, PANELS, GRILLES, SCREENS, AND INFORMATION PLATES		
1	1	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	22
1	2	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	22
1	3	PAFZZ	4130-01-160-3930	97403	13225E8159	COVER, AIR CONDITIONER	EA	1
1	4	PAOZZ	5325-00-055-7451	83058	XX78328-20	STUD, TURNBUTTON FASTENER	EA	2
1	5	PAOZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE	EA	4
1	6	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	4
1	7	XBFFF		97403	13214E3864-1	COVER	EA	1
1	8	MFFFF		97403	13214E3864-1/2	INSULATION, 1/4 THK, MFD FROM MIL-I-14511-1/4	EA	1
1	9	XBFFF		97403	13214E3864-1/1	COVER	EA	1
1	10	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	8
1	11	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	8
1	12	XBFZZ		97403	13225E8117	GRILLE, CONDENSER OUTLET	EA	2
1	13	PAFZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	12
1	14	XBFZZ		97403	13214E4328	PLATE, INFORMATION ..... DMD, EAZ	EA	2
1	14	XBFZZ		97403	13214E4329	PLATE, INFORMATION ..... EAY	EA	2
1	15	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	6
1	16	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	16
1	17	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	8
1	18	XBFFF		97403	13225E8171	COVER	EA	1
1	19	MFFFF		97403	13225E8171/4	GASKET, 1/8 THK X 1/2 W X 12-3/4 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
1	20	MFFFF		97403	13225E8171/2	GASKET, 1/8 THK X 1/2 W X 12-3/4 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
1	21	XBFZZ		97403	13225E8171-1	COVER	EA	1
1	22	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	14
1	23	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	14
1	24	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	14
1	25	XBFZZ		97403	13225E8101	GUARD, CONDENSER COIL	EA	1
1	26	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	2
1	27	XBFZZ		97403	13216E4524	PLATE, MOISTURE INDICATOR	EA	1
1	28	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	2
1	29	XBFZZ	9905-01-055-0219	97403	13217E6814	PLATE, INSTRUCTION	EA	1
1	30	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	6
1	31	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	6
1	32	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	6
1	33	XBFFF		97403	13225E8133	COVER, SERVICE VALVES	EA	1
1	34	MFFZZ		97403	13225E8133/4	GASKET, 1/8 THK X 1/2 W X 5-9/16 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
1	35	MFFZZ		97403	13225E8133/2	GASKET, 1/8 THK X 1/2 W X 5-1/8 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
1	36	XBFZZ		97403	13225E8133-1	COVER	EA	1

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
1	37	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	4
1	38	PAOZZ	5[illegible]0-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	4
1	39	XBFFF		97403	13225E8091	COVER, CONDENSER FAN	EA	1
1	40	MFFZZ		97403	13225E8091/2	. GASKET, 1/8 THK X 13-3/8 X 13-3/8 RND, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
1	41	XBFZZ		97403	13225E8091-1	. COVER	EA	1
1	42	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE	EA	8
1	43	PAOZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING HEXAGON	EA	8
1	44	XBFZZ		97403	13225E8156	COVER	EA	2
1	45	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	6
1	46	XBFZZ		97403	13217E5404	PLATE, INFORMATION	EA	1
1	47	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	2
1	48	XBFZZ		97403	13214E3957	PLATE, INFORMATION	EA	1
1	49	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	4
1	50	XBFZZ		94833	12577	PLATE, IDENTIFICATION DMD	EA	1
1	50	XBFZZ		94833	120K0345	PLATE, IDENTIFICATION EAY	EA	1
1	50	XBFZZ		94833	120K0346	PLATE, IDENTIFICATION EAZ	EA	1

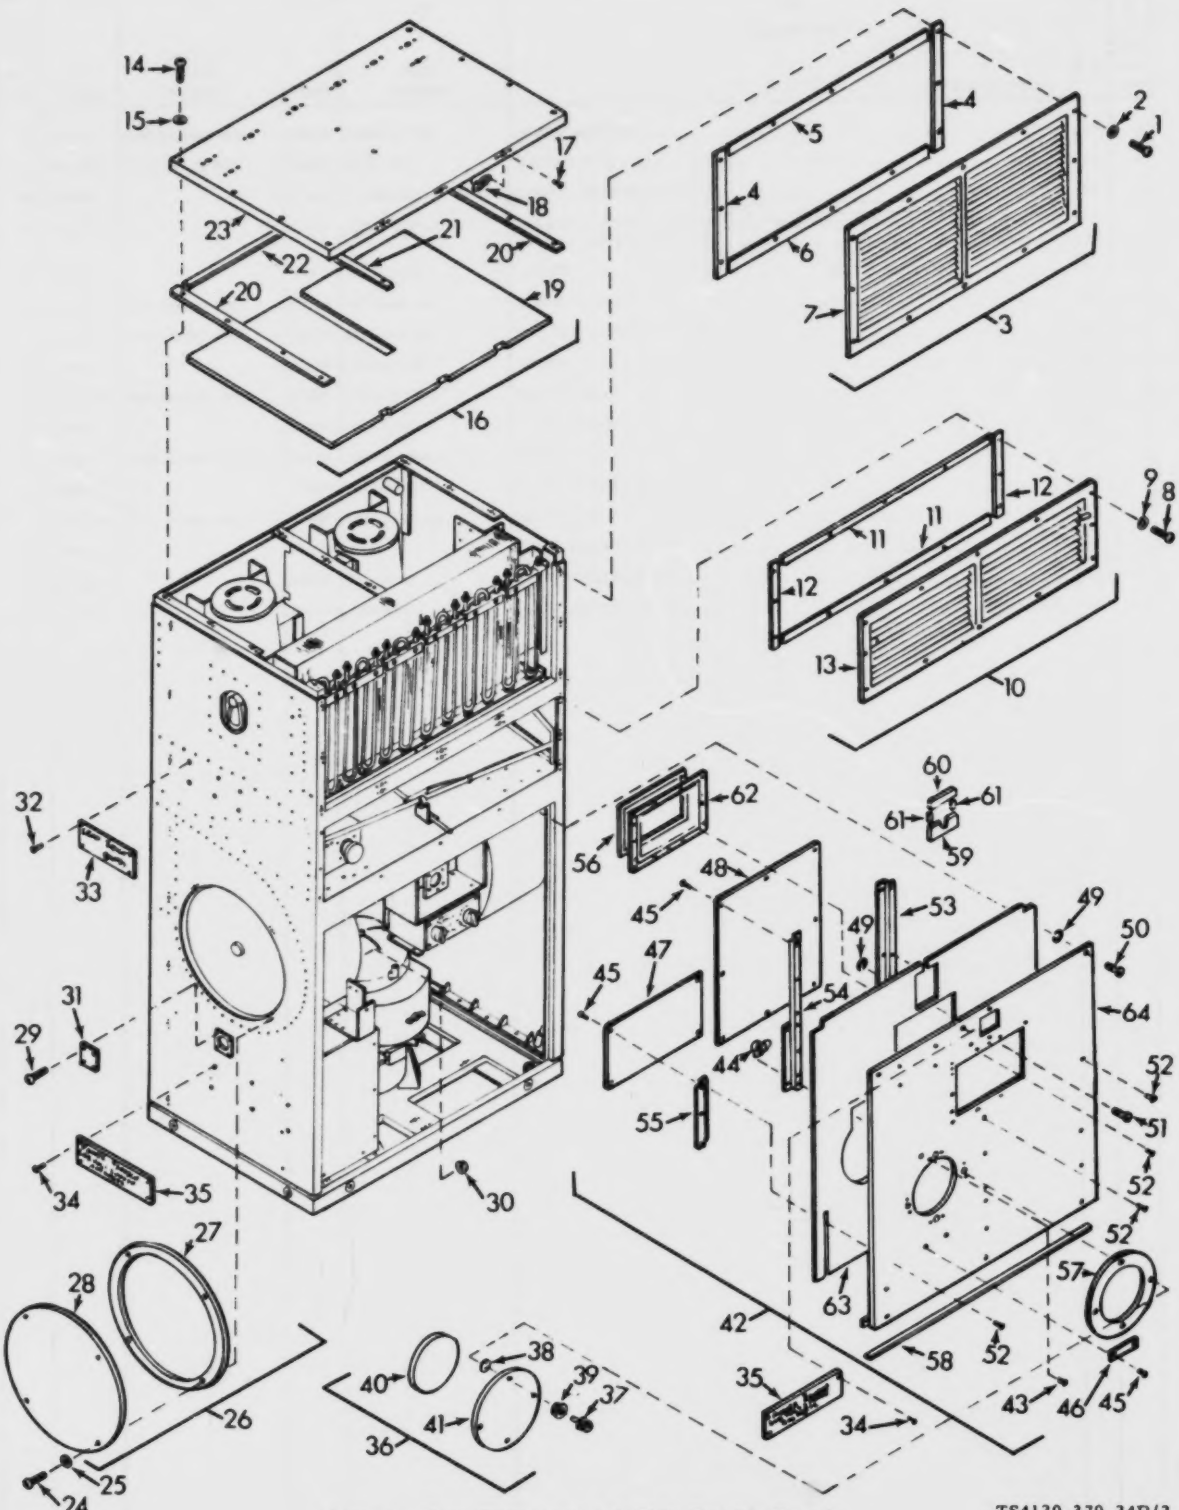

Figure 2. Top, Front, and Left Side Outside Panels

TS4120-370-24P/2

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	1	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	12
2	2	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	12
2	3	XBFFF		97403	13214E3931	GRILLE, METAL	EA	1
2	4	MFFZZ		97403	13214E3931/2	GASKET, 1/8 THK X 3/4 W X 13-7/8 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
2	5	MFFZZ		97403	13214E931/3	GASKET, 1/8 THK X 3/4 W X 28 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
2	6	MFFZZ		97403	13214E931/4	GASKET, 1/8 THK X 3/4 W X 28 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
2	7	XBFZZ		97403	13214E3929	GRILLE, METAL	EA	1
2	8	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	12
2	9	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	12
2	10	XBFFF		97403	13214E3937	GRILLE, METAL	EA	1
2	11	MFFZZ		97403	13214E3937/2	GASKET, 1/8 THK X 3/4 W X 28 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	2
2	12	MFFZZ		97403	13214E3937/3	GASKET, 1/8 THK X 3/4 W X 9 L, MFD FROM ASTM-D—1056-SBE42CF2-1/8	EA	2
2	13	XBFZZ		97403	13214E3936	GRILLE, METAL	EA	1
2	14	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	18
2	15	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	18
2	16	XBFFF		97403	13225E8090	PANEL, TOP	EA	1
2	17	PAFZZ	5320-00-117-6939	96906	MS20426AD3-5	RIVET, SOLID	EA	22
2	18	PAFZZ	5310-00-623-5989	80205	NAS1031A3	NUT, SELF-LOCKING, PLATE	EA	11
2	19	MFFZZ		97403	13225E8090/3	INSULATION, 1/2 THK X 19-1/16 W X 28-5/16 L, MFD FROM MIL-I-14511-1/2	EA	1
2	20	MFFZZ		97403	13225E8090/4	GASKET, 1/4 THK X 1 W X 19-3/4 L, MFD FROM ASTM-D-1056-SBE42CF2-1/4	EA	2
2	21	MFFZZ		97403	13225E8090/5	GASKET, 1/4 THK X 3/4 w X 12-1/8 L, MFD FROM ASTM-D-1056-SBE42CF2-1/4	EA	1
2	22	MFFZZ		97403	13225E8090/6	GASKET, 1/4 THK X 3/4 W X 27-1/4 L, MFD FROM ASTM-D-1056-SBE42CF2-1/4	EA	1
2	23	XBFZZ		97403	13225E8090-1	TOP PANEL	EA	1
2	24	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	4
2	25	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	4
2	26	XBFFF		97403	13225E8091	COVER, CONDENSER FAN	EA	1
2	27	MFFZZ		97403	13225E8091/2	GASKET, 1/8 THK X 13-3/8 X 13-3/8 RND, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
2	28	XBFZZ		97403	13225E8091-1	COVER	EA	1
2	29	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE	EA	4
2	30	PAOZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING, HEXAGON	EA	4
2	31	XBFZZ		97403	13225E8156	COVER	EA	1
2	32	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	6
2	33	XBFZZ		97403	13217E5404	PLATE, INFORMATION	EA	1
2	34	PAOZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	12
2	35	XBFZZ		97403	13214E4328	PLATE, INFORMATION . . . . . DMD,EAZ	EA	2

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	35	XBFZZ		97403	13214E4329	PLATE, INFORMATION . . . . . EAY	EA	2
2	36	XBFFF		97403	13214E4129	BAFFLE	EA	1
2	37	PAFZZ	5325-00-641-1632	71286	40S37-7	. STUD ASSEMBLY	EA	4
2	38	PAFZZ	5365-00-598-1474	71286	R45	. RING, RETAINING	EA	4
2	39	PAFZZ	5325-00-282-2045	71286	4002N	. EYELET, TURNLOCK FASTENER	EA	4
2	40	MFFZZ		97403	13214E4129/5	. INSULATION, MFD FROM TAF-E-1/20-AP-PSA	EA	2
2	4	XBFZZ		97403	13214E4129-1	. BAFFLE	EA	1
2	42	XBFFF		97403	13225E8089	PANEL, LOWER	EA	1
2	43	PAFZZ	5320-00-117-6950	96906	MS20426AD4-5	. RIVET, SOLID	EA	8
2	44	PAFZZ	5325-00-639-7264	71286	244-16C	. RECEPTACLE, TURNLOCK	EA	4
2	45	PAFZZ	5320-00-932-1972	97403	13214E3789-2	. RIVET, BLIND	EA	12
2	46	XBFZZ		97403	13214E4266	. PLATE, INFORMATION	EA	1
2	47	XBFZZ		97403	13225E8081	. PLATE, FLUID DIAGRAM	EA	1
2	48	XBFZZ		97403	13225E8099	. PLATE, INFORMATION, WIRING DIAGRAM . . . . . DMD	EA	1
2	48	XBFZZ		97403	13225E8100	. PLATE, SCHEMATIC DIAGRAM . . . . . EAZ, EAY	EA	1
2	49	PAOZZ	5310-00-880-9344	97403	13211E8337	. WASHER, LOCK	EA	5
2	50	PAOZZ	5305-00-060-9828	94222	12-11-611-12	. SCREW, PANEL FASTENEPANEL FASTENER	EA	3
2	51	PAOZZ	5305-00-833-1978	94222	12-11-205-12	. SCREW, PANEL FASTENEPANEL FASTENER	EA	2
2	52	PAFZZ	5320-00-882-8388	97403	13214E3789-3	. RIVET, BLIND	EA	27
2	53	XBFZZ		97403	13225E8089-12	. SUPPORT	EA	1
2	54	XBFZZ		97403	13225E8089-15	. SUPPORT	EA	1
2	55	XBFZZ		97403	13225E8089-16	. SUPPORT	EA	1
2	56	MFFZZ		97403	13225E8089/21	. GASKET 1/4 THK X 5/16 W X 11-1/4 L, MFD FROM ASTM-D-1056 SBE42CF2-1/4	EA	1
2	57	MFFZZ		97403	13225E8089/2	. GASKET, 1/8 THK X 8 X 8 RND, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
2	58	MFFZZ		97403	13225E8089/8	. GASKET, 1/8 THK X 3/8 W X 27-3/4 L, MFD FROM ASTM-D-1056-SBE42CF2-1/8	EA	1
2	59	MFFZZ		97403	13225E8089/24	. GASKET, 1/4 THK X 1-3/16 W X 2-5/8 L, MFD FROM ASTM-D-1056-SBE42CF2-1/4	EA	1
2	60	MFFZZ		97403	13225E8089/23	. GASKET, 1/4 THK X 3/16 W X 2-5/8 L, MFD FROM ASTM-D-1056-SBE-42CF2-1/4	EA	1
2	61	MFFZZ		97403	13225E8089/22	. GASKET, 1/4 THK X 3/16 W X 2 L, MFD FROM ASTM-D-1056-SBE42CF2-1/4	EA	2
2	62	XBFZZ		97403	13225E8089-4	. INSERT, PANEL	EA	1
2	63	MFFZZ		97403	13225E8089/14	. INSULATION, MFD FROM TAF-E-1/2-AP-PSA	EA	1
2	64	XBFZZ		97403	13225E8089-1	. PANEL	EA	1

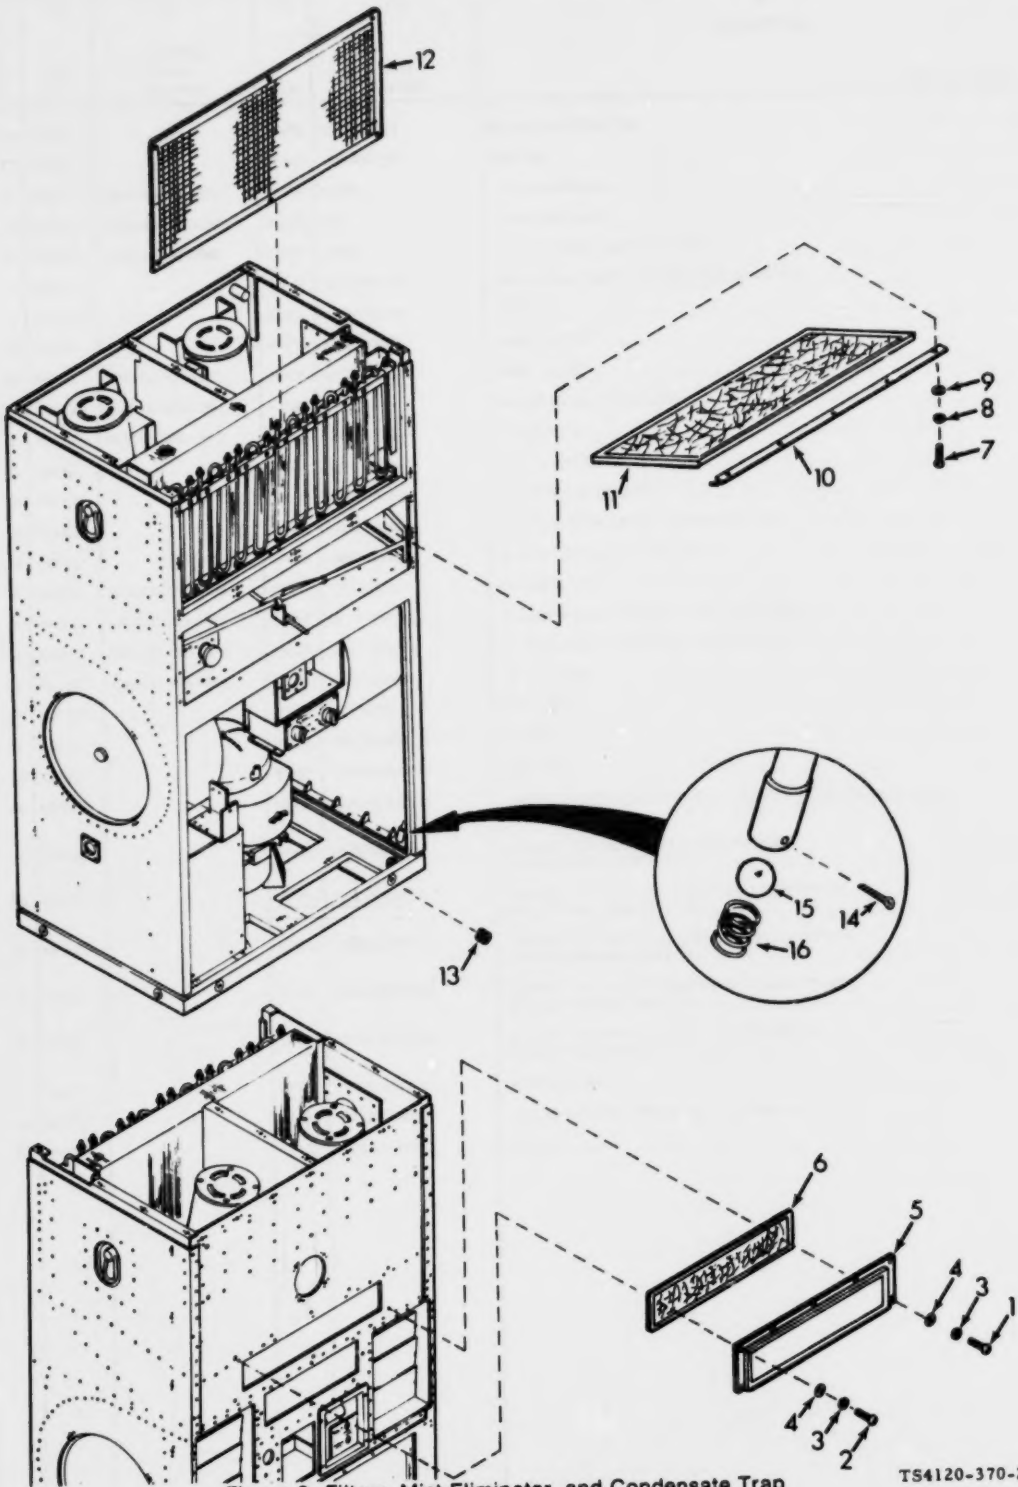

Figure 3. Filters, Mist Eliminator, and Condensate Trap

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 02 AIR CIRCULATING AND CONDENSATE DRAIN SYSTEM		
3	1	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	3
3	2	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	4
3	3	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK, HELICAL	EA	7
3	4	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	7
3	5	XBOZZ		97403	13225E8106	FRAME, FILTER	EA	1
3	6	PAOZZ	4130-00-193-8488	97403	13214E3972-1	FILTER ELEMENT, AIR	EA	1
3	7	PAOZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	5
3	8	PAOZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK, HELICAL	EA	5
3	9	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	5
3	10	XBOZZ		97403	13225E8111	SUPPORT, FILTER, UPPER	EA	1
3	11	PAOZZ	4130-00-951-0806	94833	54947	FILTER ELEMENT, AIR DMD	EA	1
3	11	PAOZZ		97403	13214E3972-2	FILTER, AIR CONDITIONING EAZ, EAY	EA	1
3	12	XBOZZ		97403	13225E8119	MIST ELIMINATOR	EA	1
3	13	PAOZZ	4730-00-959-2329	96906	MS49005-7	PLUG, PIPE DMD	EA	8
3	13	PAOZZ		97403	13211E8178	PLUG, PIPE EAZ, EAY	EA	8
3	14	PAOZZ	5315-00-234-1856	96906	MS24665-155	PIN, COTTER	EA	1
3	15	XBOZZ	3110-00-136-2696	27403	13211E8411	BALL, BEARING	EA	1
3	16	PAOZZ	5360-00-240-6526	97403	13211E8412	SPRING, HELICAL, COMP	EA	1

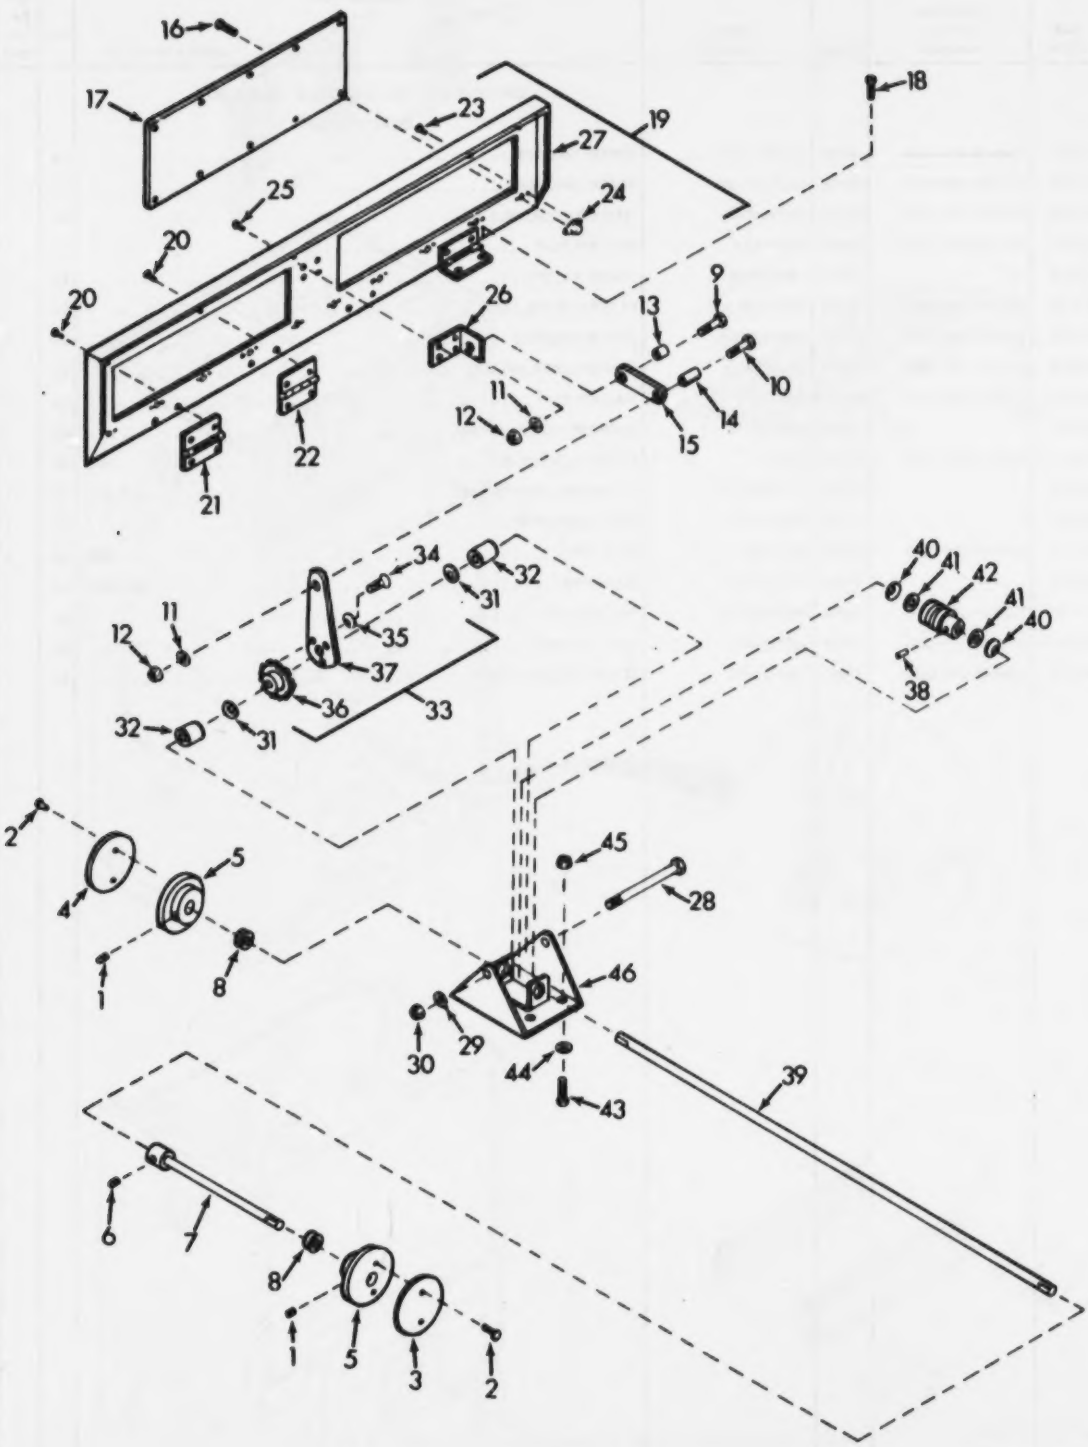

Figure 4. Fresh Air Damper

TS4120-370-24P/4

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
4	1	PAOZZ	5305-00-724-6799	96906	MS51964-51	SETSCREW	EA	2
4	2	PAOZZ	5305-00-175-3230	96906	MS21318-14	SCREW, DRIVE	EA	4
4	3	XBOZZ		97403	13214E3956	PLATE, INFORMATION	EA	1
4	4	XBOZZ		97403	13214E3954	PLATE, INFORMAITON	EA	1
4	5	XBOZZ		97403	13214E3889	KNOB	EA	2
4	6	PAOZZ	5305-00-724-6799	96906	MS51964-51	SETSCREW	EA	1
4	7	XBOZZ		97403	13225E8108	ROD, EXTENSION	EA	1
4	8	XDOZZ	5325-00-297-9884	79497	G1152	GROMMET, NONMETALLIC	EA	2
4	9	PAOZZ	5305-00-267-8974	96906	MS90726-8	SCREW, CAP, HEXAGON HEAD	EA	1
4	10	PAOZZ	5305-00-068-0514	96906	MS90727-7	SCREW, CAP, HEXAGON HEAD	EA	1
4	11	PAOZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT	EA	2
4	12	PAOZZ	5310-00-061-7325	96906	MS21045-4	NUT, SELF-LOCKING, HEXAGON	EA	2
4	13	PAOZZ	3120-01-180-4840	97403	13225E8189-1	BUSHING, SLEEVE DMD	EA	1
4	13	PAOZZ		97403	13225E8559-1	BUSHING EAZ, EAY	EA	1
4	14	PAOZZ	3120-01-180-4841	97403	13225E8189-2	BUSHING, SLEEVE DMD	EA	1
4	14	PAOZZ		97403	13225E8559-2	BUSHING EAZ, EAY	EA	1
4	15	XBOZZ		97403	13216E4529	ARM DMD	EA	1
4	15	XBOZZ		97403	13225E8180	ARM EAZ, EAY	EA	1
4	16	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	20
4	17	XBOZZ		97403	13214E3874	COVER	EA	2
4	18	PAOZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE	EA	8
4	19	XBOOO		97403	13214E3942	PANEL DMD	EA	1
4	19	XBOOO		97403	13222E9907	PANEL EAZ, EAY	EA	1
4	20	PAOZZ	5320-00-582-3523	96906	MS20601AD6W4	RIVET, BLIND	EA	8
4	21	XBOZZ		97403	13216E4510	HINGE, SPRING LOADED	EA	2
4	22	XBOZZ		97403	13216E4530	HINGE	EA	2
4	23	PAOZZ	5320-00-117-6939	96906	MS20426AD3-5	RIVET, SOLID	EA	40
4	24	PAOZZ	5310-00-623-5989	80205	NAS1031A3	NUT, SELF-LOCKING, PLATE	EA	20
4	25	PAOZZ	5320-00-117-6952	96906	MS20426AD4-7	RIVET, SOLID	EA	4
4	26	XBOZZ		97403	13214E3942-2	BRACKET DMD	EA	1
4	26	XBOZZ		97403	13222E9907-5	BRACKET EAZ, EAY	EA	1
4	27	XBOZZ		97403	13214E3942-1	PANEL DMD	EA	1
4	27	XBOZZ		97403	13222E9907-1	PANEL EAZ, EAY	EA	1
4	28	PAOZZ	5305-00-267-8962	96906	MS90727-18	SCREW, CAP, HEXAGON HEAD	EA	1
4	29	PAOZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT	EA	1
4	30	PAOZZ	5310-00-061-7325	96906	MS21045-4	NUT, SELF-LOCKING, HEXAGON	EA	1
4	31	PAOZZ	5310-00-351-4022	97403	13216E4505	WASHER, SPRING	EA	2
4	32	XBOZZ		97403	13216E4503	SPACER	EA	2
4	33	XBOOO		97403	13216E4531	ARM ASSEMBLY DMD	EA	1
4	33	XBOOO		97403	13225E8179	ARM ASSEMBLY EAZ, EAY	EA	1

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
4	34	PAOZZ	5305-00-063-3503	96906	MS24693S50	SCREW, MACHINE	EA	3
4	35	PAOZZ	5310-00-685-6855	96906	MS35790-9	WASHER, LOCK	EA	3
4	36	XBOZZ		97403	13216E4506	GEAR, WORM WHEEL	EA	1
4	37	XBOZZ		97403	13216E8040	ARM — DMD	EA	1
4	36	XBOZZ		97403	13225E8178	ARM — EAZ, EAY	EA	1
4	38	PAOZZ	5315-00-619-3275	80205	NAS561C3-11	PIN, SPRING — DMD	EA	1
4	38	PAOZZ		96906	MS17499	PIN, SPRING — EAZ, EAY	EA	1
4	39	XBOZZ		97403	13225E8092	ROD	EA	1
4	40	PAOZZ	5310-00-351-4022	97403	13216E4505	WASHER, SPRING	EA	2
4	41	PAOZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT	EA	2
4	42	XBOZZ		97403	13216E4504	GEAR, WORM — DMD	EA	1
4	42	XBOZZ		97403	13225E9286	GEAR, WORM — EAZ, EAY	EA	1
4	43	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	4
4	44	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	4
4	45	PAOZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
4	46	XBOZZ		97403	13216E4508	BRACKET	EA	1

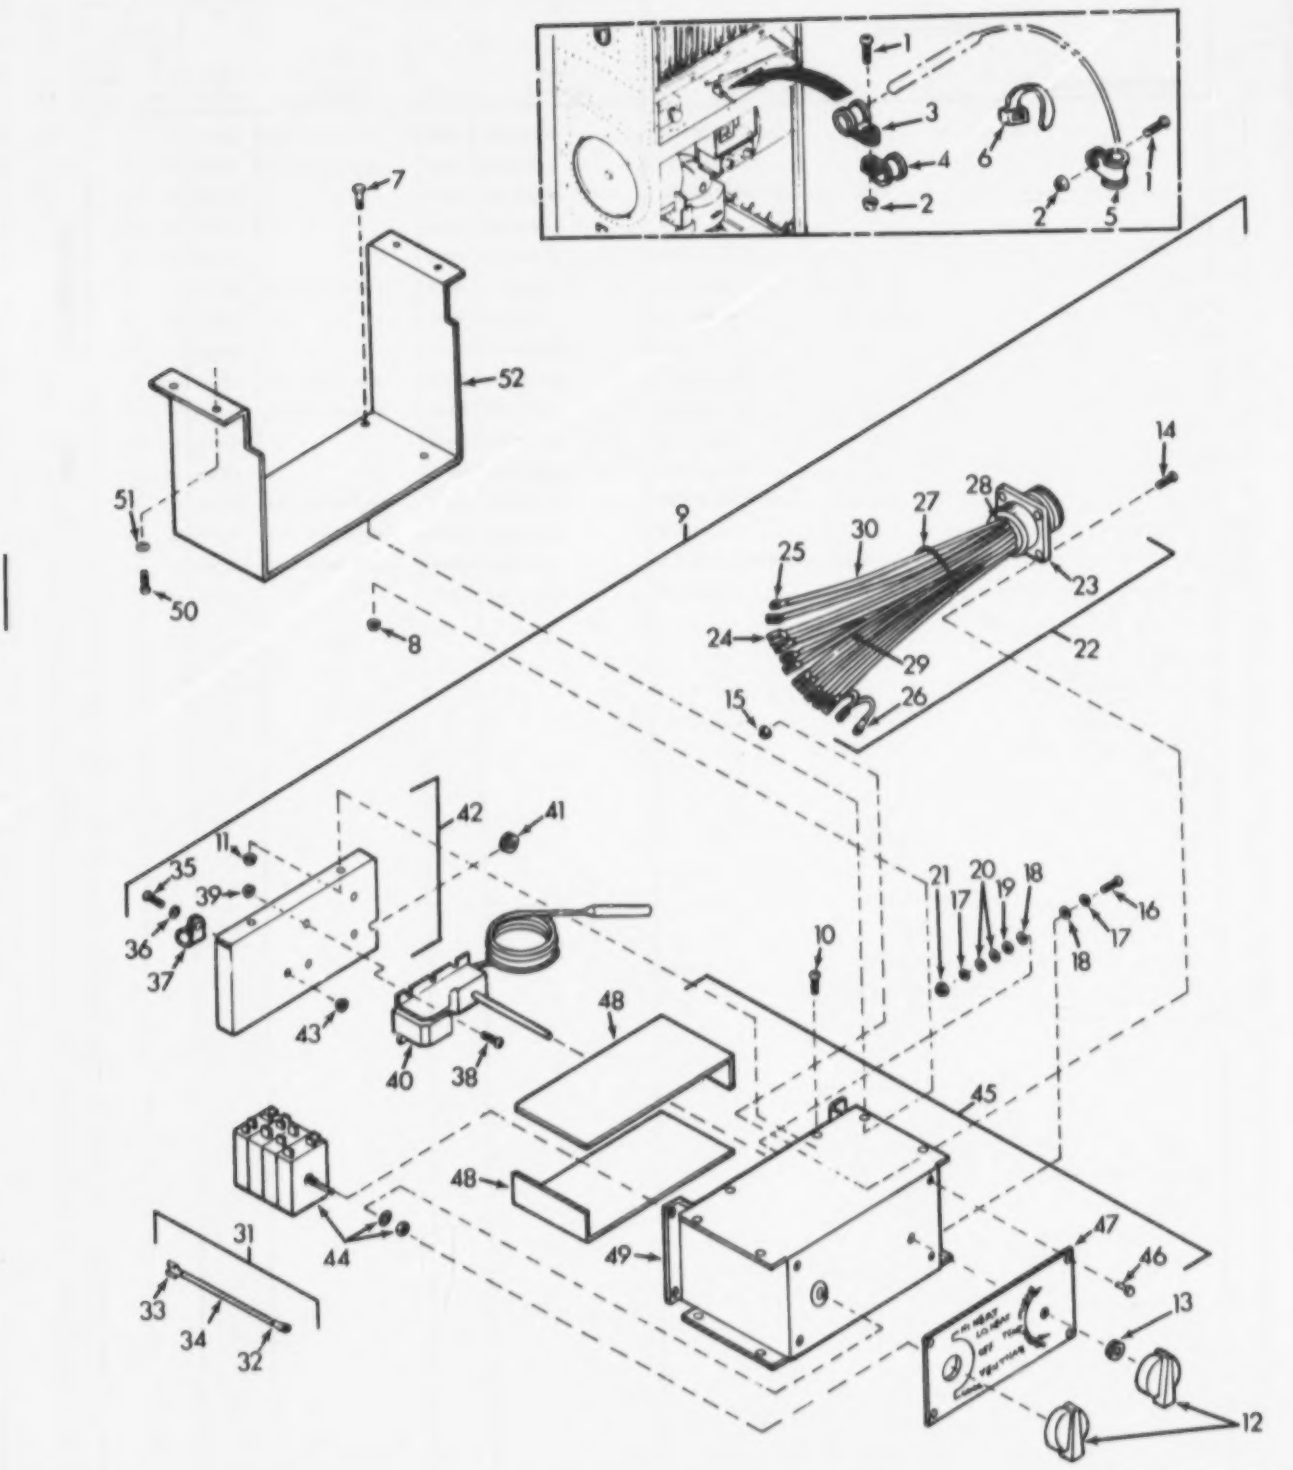

Figure 5. Control Panel Assembly

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 03 ELECTRICAL		
5	1	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW,MACHINE	EA	2
5	2	PAOZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING, HEXAGON	EA	2
5	3	XBOZZ	5340-00-143-0083	96906	MS21106B5	CLAMP,LOOP	EA	1
5	4	PAOZZ	5340-00-106-0551	96906	MS21106B10	CLAMP,LOOP	EA	1
5	5	PAOZZ	5340-00-253-5335	96906	MS21106B2	CLAMP, LOOP-CUSHIONED	EA	1
5	6	PAOZZ	5975-00-074-2072	96906	MS3367-1-9	STRAP,TIEDOWN	EA	1
5	7	PAOZZ	5306-00-722-0393	88044	AN3-48	BOLT,MACHINE	EA	4
5	8	PAOZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF LOCKING, HEXAGON	EA	4
5	9	PBOOO		97403	13225E8673	CONTROL PANEL ASSEMBLY	EA	1
5	10	PAOZZ	5305-00-984-6193	96906	MS35206-245	.SCREW,MACHINE	EA	4
5	11	PAOZZ	5310-00-889-2549	96906	MS21045-08	.NUT,SELF-LOCKING, HEXAGON	EA	4
5	12	PAOZZ		97403	13211E8264	.MACE	EA	2
5	13	PAOZZ	5325-00-263-6632	96906	MS35489-6	.GROMMET,NONMETALLIC	EA	1
5	14	PAOZZ	5305-00-889-3080	96906	MS35206-230	.SCREW,MACHINE	EA	4
5	15	PAOZZ	5310-00-889-2544	96906	MS21045-06	.NUT,SELF-LOCKING,HEXAGON	EA	4
5	16	PAOZZ	5305-00-993-1851	96906	MS35207-267	.SCREW,MACHINE	EA	1
5	17	PAOZZ	5310-00-045-3296	96906	MS35338-43	.WASHER,LOCK,HELICAL	EA	2
5	18	PAOZZ	5310-00-584-7800	96906	MS15795-708	.WASHER,FLAT	EA	2
5	19	PAOZZ	5310-00-934-9751	96906	MS35650-302	.NUT,PLAIN,HEXAGON	EA	1
5	20	PAOZZ	5310-00-809-8546	96906	MS27183-8	.WASHER,FLAT	EA	2
5	21	PAOZZ	5310-00-061-7326	96906	MS21045-3	.NUT,SELF-LOCKING, HEXAGON	EA	1
5	22	XBOOO		97403	13225E8140	.WIRING HARNESS, J8 CONNECTOR	EA	1
5	23	PAOZZ	5935-01-112-7304	97403	13211E8399C28-9P	..CONNECTOR, RECEPTACLE	EA	1
5	24	PAOZZ	5940-00-859-4475	97403	13211E8288	..TERMINAL, QUICK DISCONNECT	EA	12
5	25	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG	EA	1
5	26	PAOZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG	EA	1
5	27	MOOZZ		97403	13225E8140/8	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-I-43435TYPE-1-FINISH-B-NO-3	FT	2
5	28	MOOZZ		97403	13225E8140/6	..INSULATION, SLEEVING,1 IN L,MFD FROM M23053/5-105-9	EA	12
5	29	MOOZZ		97403	13225E8140/2	..WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	5
5	30	MOOZZ		97403	13225E8140/3	..WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9	FT	6
5	31	XBOOO		97403	13225E8155-43	.LEAD,ELECTRICAL	EA	1
5	32	PAOZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG	EA	1
5	33	PAOZZ	5940-00-859-4475	97403	13211E8288	..TERMINAL, QUICK DISCONNECT	EA	1
5	34	MOOZZ		97403	13225E8155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9	FT	1
5	35	PAOZZ	5305-00-989-7434	96906	MS35207-263	.SCREW,MACHINE	EA	1
5	36	PAOZZ	5310-00-045-3296	96906	MS35338-43	.WASHER,LOCK,HELICAL	EA	1
5	37	PAOZZ	5340-00-943-4394	96906	MS21919DG6	.CLAMP,LOOP	EA	1
5	38	PAOZZ	5305-00-984-6193	96906	MS35206-245	.SCREW,MACHINE	EA	4

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
5	39	PAOZZ	5310-00-889-2549	96906	MS21C45-08	.NUT,SELF LOCKING, HEXAGON	EA	4
5	40	PAOZZ	5930-00-876-1634	97403	13211E8301-2	.SWITCH,THERMOSTATIC	EA	1
5	41	PAOZZ	5325-00-286-6047	96906	MS35489-1	.GROMMET,NONMETALLIC	EA	1
5	42	XBOOO		97403	13214E4054	.PANEL	EA	1
5	43	PAOZZ		97403	13211E8338-2	..SPACE NUT	EA	1
5	44	PAOZZ	5930-00-236-2351	97403	13214E6201-1	.SWITCH,ROTARY	EA	1
5	45	XBOOO		97403	13225E8074	.CONTROL PANEL	EA	1
5	46	PAOZZ	5320-00-932-1972	97403	13214E3789-2	..RIVET,BLIND	EA	6
5	47	XBOZZ		97403	13214E4053	..PLATE,INFORMATION	EA	1
5	48	XBOZZ	5970-00-173-2385	97403	13214E3762	..INSULATION, SHEET,ELECTRICAL	EA	2
5	49	XBOZZ		97403	13225E8074-1	..CONTROL PANEL	EA	1
5	50	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW,MACHINE	EA	4
5	51	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	4
5	52	XBOZZ		97403	13225E8102	SUPPORT,CONTROL BOX	EA	1

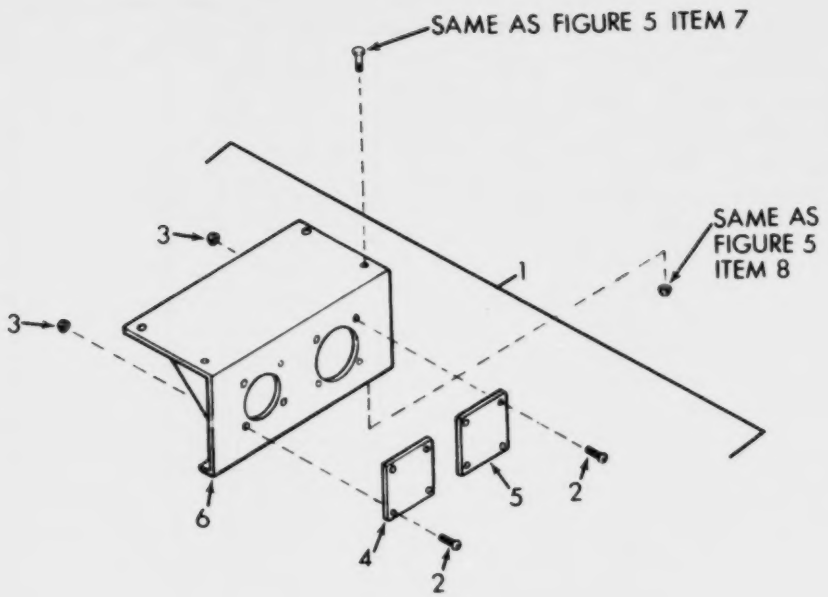

Figure 6. Block-Off Assembly

TS4120-370-24P/6

SECTION II

(1) ILLUSTRATION (a) FIG NO	(b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
6	1	PBOZZ	4130-00-469-6758	97403	13214E3065-1	BLOCKOFF ASSEMBLY	EA	1
6	2	PAOZZ	5305-00-889-3060	96906	MS35206-230	.SCREW,MACHINE	EA	8
6	3	PAOZZ	5310-00-889-2544	96906	MS21045-08	.NUT,SELF-LOCKING,HEXAGON	EA	8
6	4	XBOZZ		97403	13214E3471-2	.COVER,BLANK	EA	1
6	5	XBOZZ		97403	13214E3471-3	.COVER,BLANK	EA	1
6	6	XBOZZ		97403	13214E3922	.BRACKET,BLOCK-OFF	EA	1

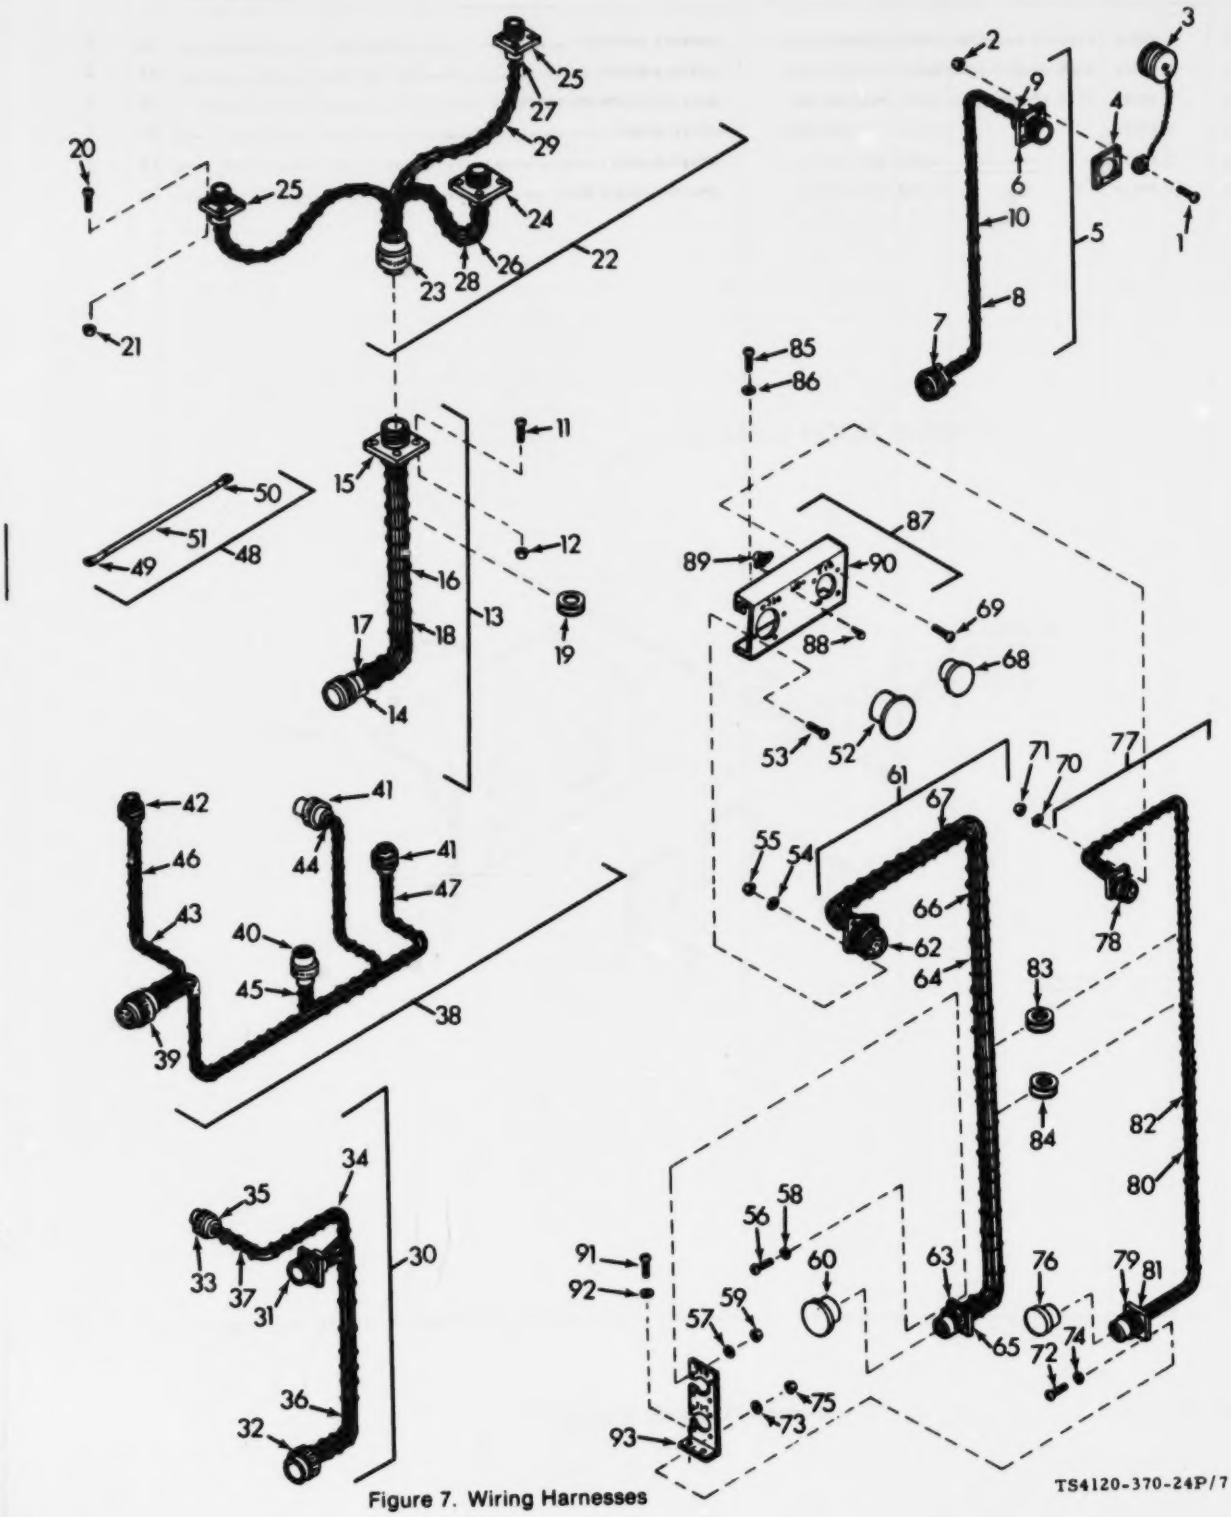

Figure 7. Wiring Harnesses

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
7	1	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW,MACHINE	EA	4
7	2	PAOZZ	5310-00-889-2544	96906	MS21C45-06	NUT,SELF-LOCKING, HEXAGON	EA	4
7	3	XBOZZ	5935-00-578-2742	96906	MS25043-24D	COVER,ELECTRICAL	EA	1
7	4	PAOZZ	5330-00-063-7889	96906	MS51C07-9	GASKET	EA	1
7	5	XBOOO		97403	13225E0138	WIRING HARNESS, J1-P13 CONNECTORS	EA	1
7	6	PAOZZ	5935-00-853-3133	96906	MS3100R24-22P	.CONNECTOR, RECEPTACLE	EA	1
7	7	PAOZZ	5935-01-095-6414	96906	MS21C6R24-22SX	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	8	MOOZZ		97403	13225E0138/6	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	3
7	9	MOOZZ		97403	13225E0138/4	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-107-9	EA	8
7	10	MOOZZ		97403	13225E0138/3	.WIRE,ELECTRICAL, AWG 8,MFD FROM M5086/2-8-9	FT	17
7	11	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW,MACHINE	EA	4
7	12	PAOZZ	5310-00-889-2544	96906	MS21C45-06	NUT,SELF-LOCKING,HEXAGON	EA	4
7	13	XBOOO		97403	13225E0142	WIRING HARNESS, P14-J12 CONNECTORS	EA	1
7	14	PAOZZ	5935-00-480-3752	96906	MS21C6R28-9PN	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	15	PAOZZ	5935-01-095-8434	96906	MS21CCR28-9SZ	.CONNECTOR, RECEPTACLE	EA	1
7	16	MOOZZ		97403	13225E0142/7	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	3
7	17	MOOZZ		97403	13225E0142/5	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-1C5-9	EA	24
7	18	MOOZZ		97403	13225E0142/3	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	60
7	19	PAOZZ	5325-00-641-2800	96906	MS35489-1C4	GROMMET,RUBBER	EA	1
7	20	PAOZZ	5305-00-889-2999	96906	MS35206-217	SCREW,MACHINE	EA	12
7	21	PAOZZ	5310-00-889-2543	96906	MS21C45-04	NUT,SELF-LOCKING, HEXAGON	EA	12
7	22	XBOOO		97403	13225E0141	WIRING HARNESS, P12-P9-P3-J7 CONNECTORS	EA	1
7	23	PAOZZ	5935-01-095-6413	96906	MS21C6R28-9PZ	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	24	PAOZZ	5935-00-646-6664	96906	MS21CCR20-15SC	.CONNECTOR, RECEPTACLE	EA	1
7	25	PAOZZ	5935-00-686-9540	96906	MS21COR14S-7S	.CONNECTOR,	EA	2
7	26	MOOZZ		97403	13225E0141/8	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	5
7	27	MOOZZ		97403	13225E0141/6	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-1C5-9	EA	24
7	28	MOOZZ		97403	13225E0141/4	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	10
7	29	MOOZZ		97403	13225E0141/5	.WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9	FT	10
7	30	XBOOO		97403	13225E0144	WIRING HARNESS, P8-P4-P16 CONNECTORS	EA	1
7	31	PAOZZ	5935-00-826-3956	96906	MS21COR28-9S	.CONNECTOR, RECEPTACLE	EA	1
7	32	PAOZZ	5935-00-728-6437	96906	MS21C6R36-14P	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	33	PAOZZ	5935-00-682-0569	96906	MS21C6R20-7SC	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	34	MOOZZ		97403	13225E0144/8	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	5
7	35	MOOZZ		97403	13225E0144/6	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-1C5-9	EA	36
7	36	MOOZZ		97403	13225E0144/4	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	16
7	37	MOOZZ		97403	13225E0144/5	.WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9	FT	27
7	38	XBOOO		97403	13225E0143	WIRING HARNESS, P10-P6-P5-P2-P11 CONNECTORS	EA	1

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
7	39	PAOZZ		96906	MS3106R36-14PX	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	40	PAOZZ	5935-00-870-7588	96906	MS3106R24-11S	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	41	PAOZZ	5935-00-729-4638	96906	MS3106P12S-3S	.CONNECTOR,PLUG, ELECTRICAL	EA	2
7	42	PAOZZ	5935-00-729-4153	96906	MS3106R10-11S	.CONNECTOR,PLUG, ELECTRICAL	EA	1
7	43	MOOZZ		97403	13225E0143/10	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	6
7	44	MOOZZ		97403	13225E0143/8	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-1C5-9	EA	32
7	45	MOOZZ		97403	13225E0143/5	.WIRE,ELECTRICAL, AWG 10,MFD FROM M5086/1-10-9	FT	6
7	46	MOOZZ		97403	13225E0143/6	.WIRE,ELECTRICAL, AWG 12,MFD FROM M5086/1-12-9	FT	10
7	47	MOOZZ		97403	13225E0143/7	.WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9	FT	10
7	48	XBOOO		97403	13225E0159-41	LEAD,ELECTRICAL	EA	1
7	49	PAOZZ	5940-00-114-1309	96906	MS25036-116	.TERMINAL,LUG	EA	1
7	50	PAOZZ	5940-00-143-5284	96906	MS25036-115	.TERMINAL,LUG	EA	1
7	51	MOOZZ		97403	13225E0159/1	.WIRE,ELECTRICAL, AWG 8,MFD FROM M5086/2-8-9	FT	2
7	52	PAOZZ	5340-01-041-9514	96906	MS90376-28Y	CAP,PROTECTIVE,DUST	EA	1
7	53	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW,MACHINE	EA	4
7	54	PAOZZ	5310-00-983-8483	96906	MS27183-5	WASHER,FLAT	EA	4
7	55	PAOZZ	5310-00-889-2544	96906	MS21C45-06	NUT,SELF-LOCKING, HEXAGON	EA	4
7	56	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW,MACHINE	EA	4
7	57	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	4
7	58	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK,HELICAL	EA	4
7	59	PAOZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING, HEXAGON	EA	4
7	60	PAOZZ	5340-01-041-9514	96906	MS90376-28Y	CAP,PROTECTIVE,DUST	EA	1
7	61	XBOOO		97403	13225E0145	WIRING HARNESS	EA	1
7	62	PAOZZ	5935-00-826-3956	96906	MS3100R28-9S	.CONNECTOR, RECEPTACLE	EA	1
7	63	PAOZZ	5935-01-112-7304	97403	13211E0399CZ8-9P	.CONNECTOR, RECEPTACLE	EA	1
7	64	MOOZZ		97403	13225E0145/7	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	4
7	65	MOOZZ		97403	13225E0145/5	.INSULATION, SLEEVING,1 IN L,MFD FROM M23C53/5-1C5-9	EA	24
7	66	MOOZZ		97403	13225E0145/3	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	33
7	67	MOOZZ		97403	13225E0145/4	.WIRE,ELECTRICAL, AWG 18,MFD FROM M5086/1-18-9	FT	24
7	68	PAOZZ	5340-00-889-8677	96906	MS90376-24B	CAP,PROTECTIVE,DUST	EA	1
7	69	PAOZZ	5305-00-889-3000	96906	MS35206-230	SCREW,MACHINE	EA	4
7	70	PAOZZ	5310-00-983-8483	96906	MS27183-5	WASHER,FLAT	EA	4
7	71	PAOZZ	5310-00-889-2544	96906	MS21C45-06	NUT,SELF-LOCKING, HEXAGON	EA	4
7	72	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW,MACHINE	EA	4
7	73	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	4
7	74	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK,HELICAL	EA	4
7	75	PAOZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING, HEXAGON	EA	4
7	76	PAOZZ	5340-00-191-4898	96906	MS90376-24Y	CAP,PROTECTIVE,DUST	EA	1
7	77	XBOOO		97403	13225EE146	WIRING HARNESS	EA	1

(1) ILLUSTRATION (a) FIG NO	(b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
7	78	PAOZZ	5935-00-853-3133	96906	MS3100R24-22P	.CONNECTOR, RECEPTACLE	EA	1
7	79	PAOZZ	5935-00-951-9777	97403	13211E8399C24-22S	.CONNECTOR, RECEPTACLE	EA	1
7	80	MOOZZ		97403	13225E8146/6	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	4
7	81	MOOZZ		97403	13225E8146/4	.INSULATION, SLEEVING,1 IN L,MFD FROM M23053/5-107-9	EA	8
7	82	MOOZZ		97403	13225E8146/3	.WIRE,ELECTRICAL, AWG 8,MFD FROM M5086/2-8-9	FT	19
7	83	PAOZZ	5325-00-171-6387	96906	MS35489-51	GROMMET,NONMETALLIC	EA	1
7	84	PAOZZ	5325-00-290-0074	96906	MS35489-109	GROMMET,NONMETALLIC	EA	1
7	85	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW,MACHINE	EA	3
7	86	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	3
7	87	XBOOO		97403	13225E8072	BRACKET, CONNECTOR MOUNTING	EA	1
7	88	PAOZZ	5320-00-117-6939	96906	MS20426AD3-5	.RIVET,SOLID	EA	2
7	89	PAOZZ	5310-00-623-5989	80205	NAS1031A3	.NUT,SELF-LOCKING, PLATE	EA	1
7	90	XBOZZ		97403	13225E8072-1	.BRACKET	EA	1
7	91	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW,MACHINE	EA	2
7	92	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	2
7	93	XBOZZ		97403	13225E8122	BRACKET, CONNECTOR MOUNTING	EA	1

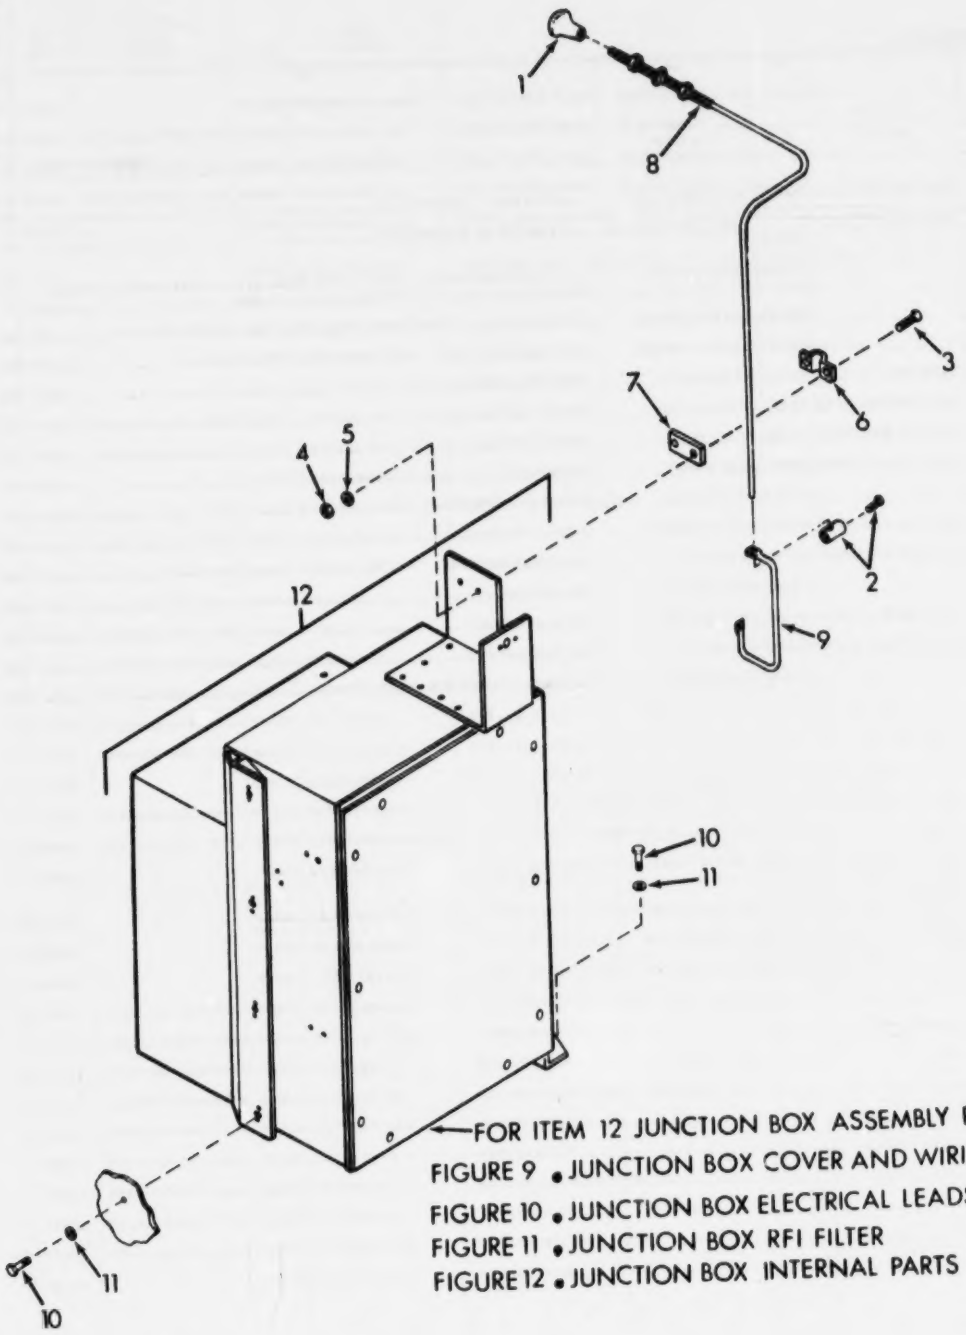

Figure 8. Junction Box

TS4120-370-24P/8

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
8	1	PAOZZ	5355-01-150-9800	97403	13217E6816	KNOB	EA	1
8	2	XBOZZ	4130-01-142-9785	97403	13217E6817	END FITTING, FLEXIBLE	EA	1
8	3	PAOZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE	EA	2
8	4	PAOZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING, HEXAGON	EA	2
8	5	PAOZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK	EA	2
8	6	XBOZZ		97403	13218E9954	CLAMP, PUSH-PULL CONTROL	EA	1
8	7	XBOZZ		97403	13218E9953	SPACER, PLATE	EA	1
8	8	PAOZZ	3040-01-099-1414	97403	13217E6815-2	CONTROL ASSEMBLY, PUSH-PULL	EA	1
8	9	XBOZZ		97403	13225E8128	ARM, ACTUATOR	EA	1
8	10	PAOZZ	5305-00-087-0259	96906	MS9122-05	SCREW, MACHINE	EA	6
8	11	PAOZZ	5310-00-809-8546	96906	MS27183-6	WASHER, FLAT	EA	6
8	12	XBOOO		97403	13225E8076	JUNCTION BOX ASSEMBLY . . . . . DMD, EAZ	EA	1
8	12	XBOOO		97403	13225E8205	JUNCTION BOX ASSEMBLY . . . . . EAY	EA	1

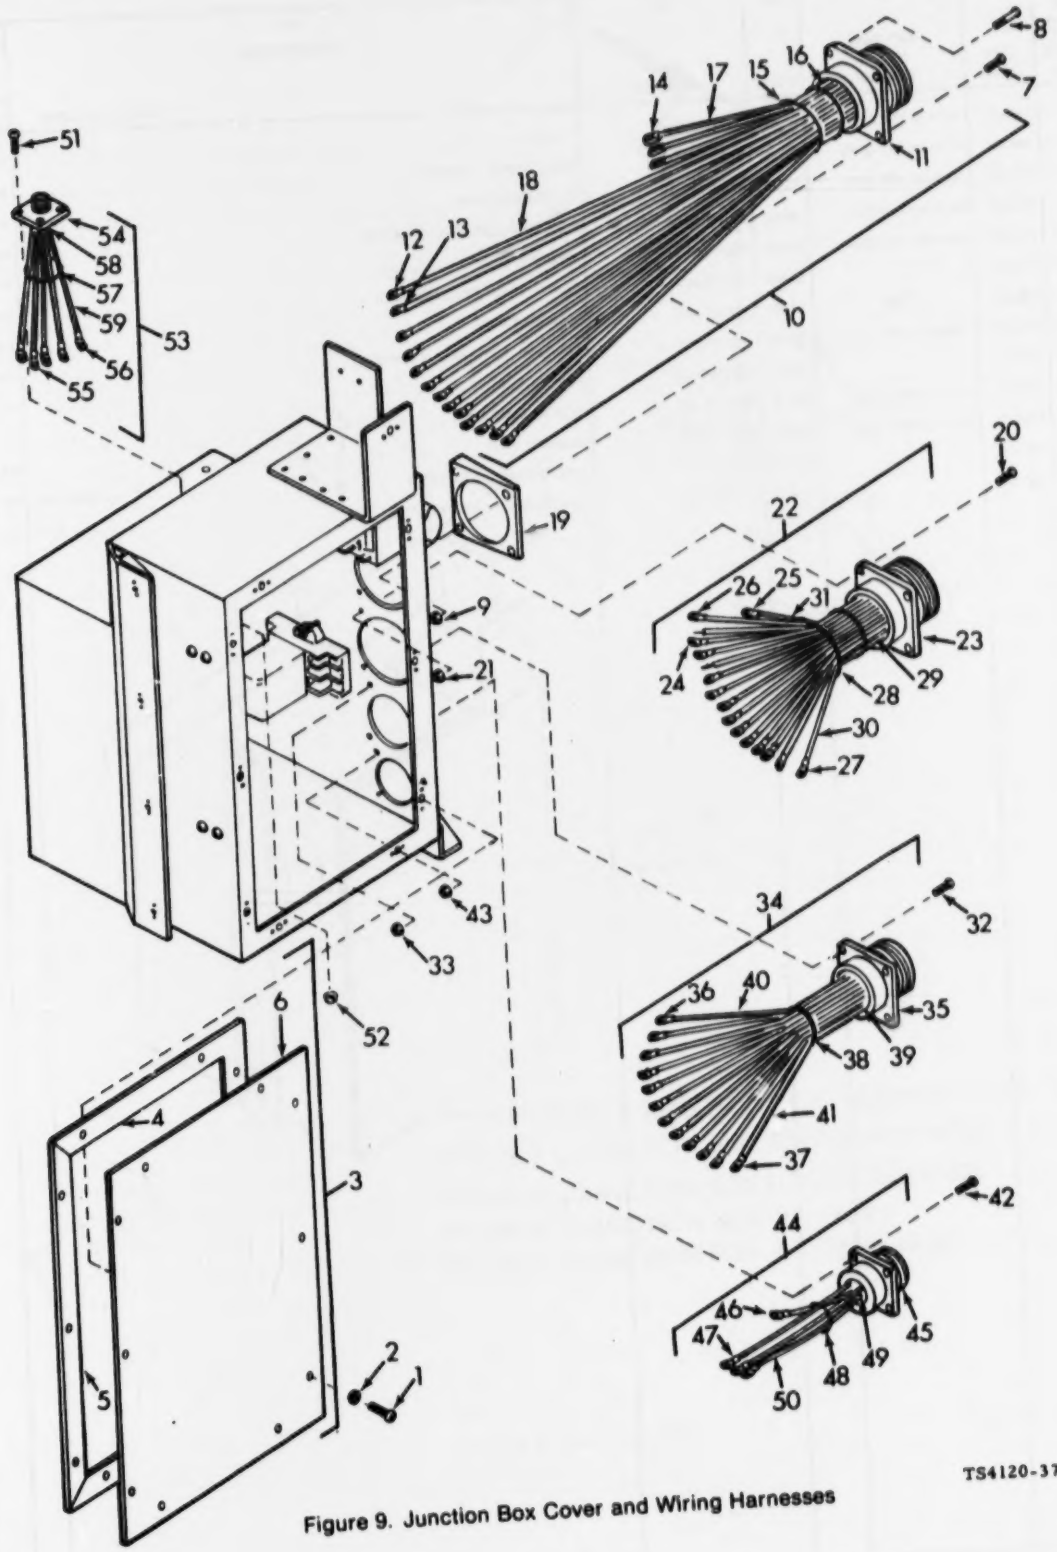

TS4120-370-24P/9

Figure 9. Junction Box Cover and Wiring Harnesses

SECTION II

(1) ILLUSTRATION (a) FIG NO	(b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	1	PAOZZ	5305-00-989-7434	96906	MS35207-263	.SCREW,MACHINE	EA	10
9	2	PAOZZ	5310-00-045-3296	96906	MS35338-43	.WASHER,LOCK,HELICAL	EA	10
9	3	XBOOO		97403	13225E0078	.COVER,JUNCTION BOX	EA	1
9	4	MOOZZ		97403	13225E0078/3	..GASKET,1/16 THK X 3/4 W X 8-1/4 L, MFD FROM ASTM-C-1056-88E42CP2-1/16	EA	2
9	5	MOOZZ		97403	13225E0078/2	..GASKET,1/16 THK X 3/4 W X 12-7/8 L,MFD FROM ASTM-C-1056-88E42CP2-1/16	EA	2
9	6	XBOZZ		97403	13225E0078-1	..COVER	EA	1
9	7	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE	EA	2
9	8	PAOZZ	5305-00-984-6221	96906	MS35206-234	.SCREW,MACHINE	EA	2
9	9	PAOZZ	5310-00-081-8087	96906	MS21044N06	.NUT,SELF-LOCKING, HEXAGON	EA	4
9	10	XBOOO		97403	13225E0149	.WIRING HARNESS, J1C CONNECTOR	EA	1
9	11	PAOZZ	5935-00-260-3311	96906	MS21C2R36-14SX	..CONNECTOR, RECEPTACLE	EA	1
9	12	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	8
9	13	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	5
9	14	PAOZZ	5940-00-859-4475	97403	13211E0208	..TERMINAL, QUICK DISCONNECT	EA	3
9	15	MOOZZ		97403	13225E0149/9	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3	FT	3
9	16	MOOZZ		97403	13225E0149/7	..INSULATION, SLEEVING,1 IN L,MFD FROM M23053/5-1C6-9	EA	16
9	17	MOOZZ		97403	13225E0149/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MSC86/1-10-9	FT	2
9	18	MOOZZ		97403	13225E0149/3	..WIRE,ELECTRICAL, AWG 16,MFD FROM MSC86/1-16-9	FT	16
9	19	XBOZZ		97403	13225E0177	.SPACER,BEVELED	EA	1
9	20	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE	EA	4
9	21	PAOZZ	5310-00-081-8087	96906	MS21044N06	.NUT,SELF-LOCKING, HEXAGON	EA	4
9	22	XBOOO		97403	13225E0148	.WIRING HARNESS, J4 CONNECTOR	EA	1
9	23	PAOZZ		96906	MS21C2R36-14S	..CONNECTOR, RECEPTACLE	EA	1
9	24	PAOZZ	5940-00-283-5280	96906	MS25C36-106	..TERMINAL,LUG	EA	2
9	25	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	1
9	26	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	7
9	27	PAOZZ	5940-00-230-0515	96906	MS25C36-154	..TERMINAL,LUG	EA	4
9	28	MOOZZ		97403	13225E0148/8	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3	FT	3
9	29	MOOZZ		97403	13225E0148/6	..INSULATION, SLEEVING,1 IN L,MFD FROM M23053/5-105-9	EA	16
9	30	MOOZZ		97403	13225E0148/2	..WIRE,ELECTRICAL, AWG 14,MFD FROM MSC86/1-14-9	FT	9
9	31	MOOZZ		97403	13225E0148/3	..WIRE,ELECTRICAL, AWG 16,MFD FROM MSC86/1-16-9	FT	7
9	32	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE	EA	4
9	33	PAOZZ	5310-00-081-8087	96906	MS21044N06	.NUT,SELF LOCKING, HEXAGON	EA	4
9	34	XBOOO		97403	13225E0150	.WIRING HARNESS, J14 CONNECTOR	EA	1
9	35	PAOZZ	5935-00-878-6787	96906	MS21C2R28-9SX	..CONNECTOR, RECEPTACLE	EA	1
9	36	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	9
9	37	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	3

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	38	MOOZZ		97403	13225E0150/7	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3.....	FT	2
9	39	MOOZZ		97403	13225E0150/5	..INSULATION,SLEEVING 1 IN L,MFD FROM M23053/5-105-9.....	EA	12
9	40	MOOZZ		97403	13225E0150/2	..WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9.....	FT	7
9	41	MOOZZ		97403	13225E0150/3	..WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9.....	FT	7
9	42	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE.....	EA	4
9	43	PAOZZ	5310-00-081-8087	96906	MS21044N06	.NUT,SELF-LOCKING, HEXAGON.....	EA	4
9	44	XBOOO		97403	13225E0139	.WIRING HARNESS, J13 CONNECTOR.....	EA	1
9	45	PAOZZ	5935-00-850-0546	96906	MS27029A-22PX	..CONNECTOR, RECEPTACLE.....	EA	1
9	46	PAOZZ	5940-00-143-5284	96906	MS25036-115	..TERMINAL,LUG.....	EA	1
9	47	PAOZZ	5940-00-114-1305	96906	MS25036-116	..TERMINAL,LUG.....	EA	3
9	48	MOOZZ		97403	13225E0139/6	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3.....	FT	1
9	49	MOOZZ		97403	13225E0139/4	..INSULATION,SLEEVING, 1 IN L,MFD FROM M23053/5-101-9.....	EA	4
9	50	MOOZZ		97403	13225E0139/2	..WIRE,ELECTRICAL,AWG 8,MFD FROM M5086/2-8-9.....	FT	3
9	51	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE.....	EA	4
9	52	PAOZZ	5310-00-081-8087	96906	MS21044N06	.NUT,SELF-LOCKING, HEXAGON.....	EA	4
9	53	XBOOO		97403	13225E0161	.WIRING HARNESS, J21 CONNECTOR.....	EA	1
9	54	PAOZZ	5935-00-880-7163	96906	MS3102P16S-8S	..CONNECTOR, RECEPTACLE.....	EA	1
9	55	PAOZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG.....	EA	1
9	56	PAOZZ	5940-00-283-5280	96906	MS25036-104	.TERMINAL,LUG.....	EA	4
9	57	MOOZZ		97403	13225E0161/6	..TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3.....	FT	1
9	58	MOOZZ		97403	13225E0161/4	..INSULATION, SLEEVING,1 IN L,MFD FROM M23053/5-105-9.....	EA	5
9	59	MOOZZ		97403	13225E0161/2	..WIRE,ELECTRICAL, AWG 16,MFD FROM M5086/1-16-9.....	FT	3

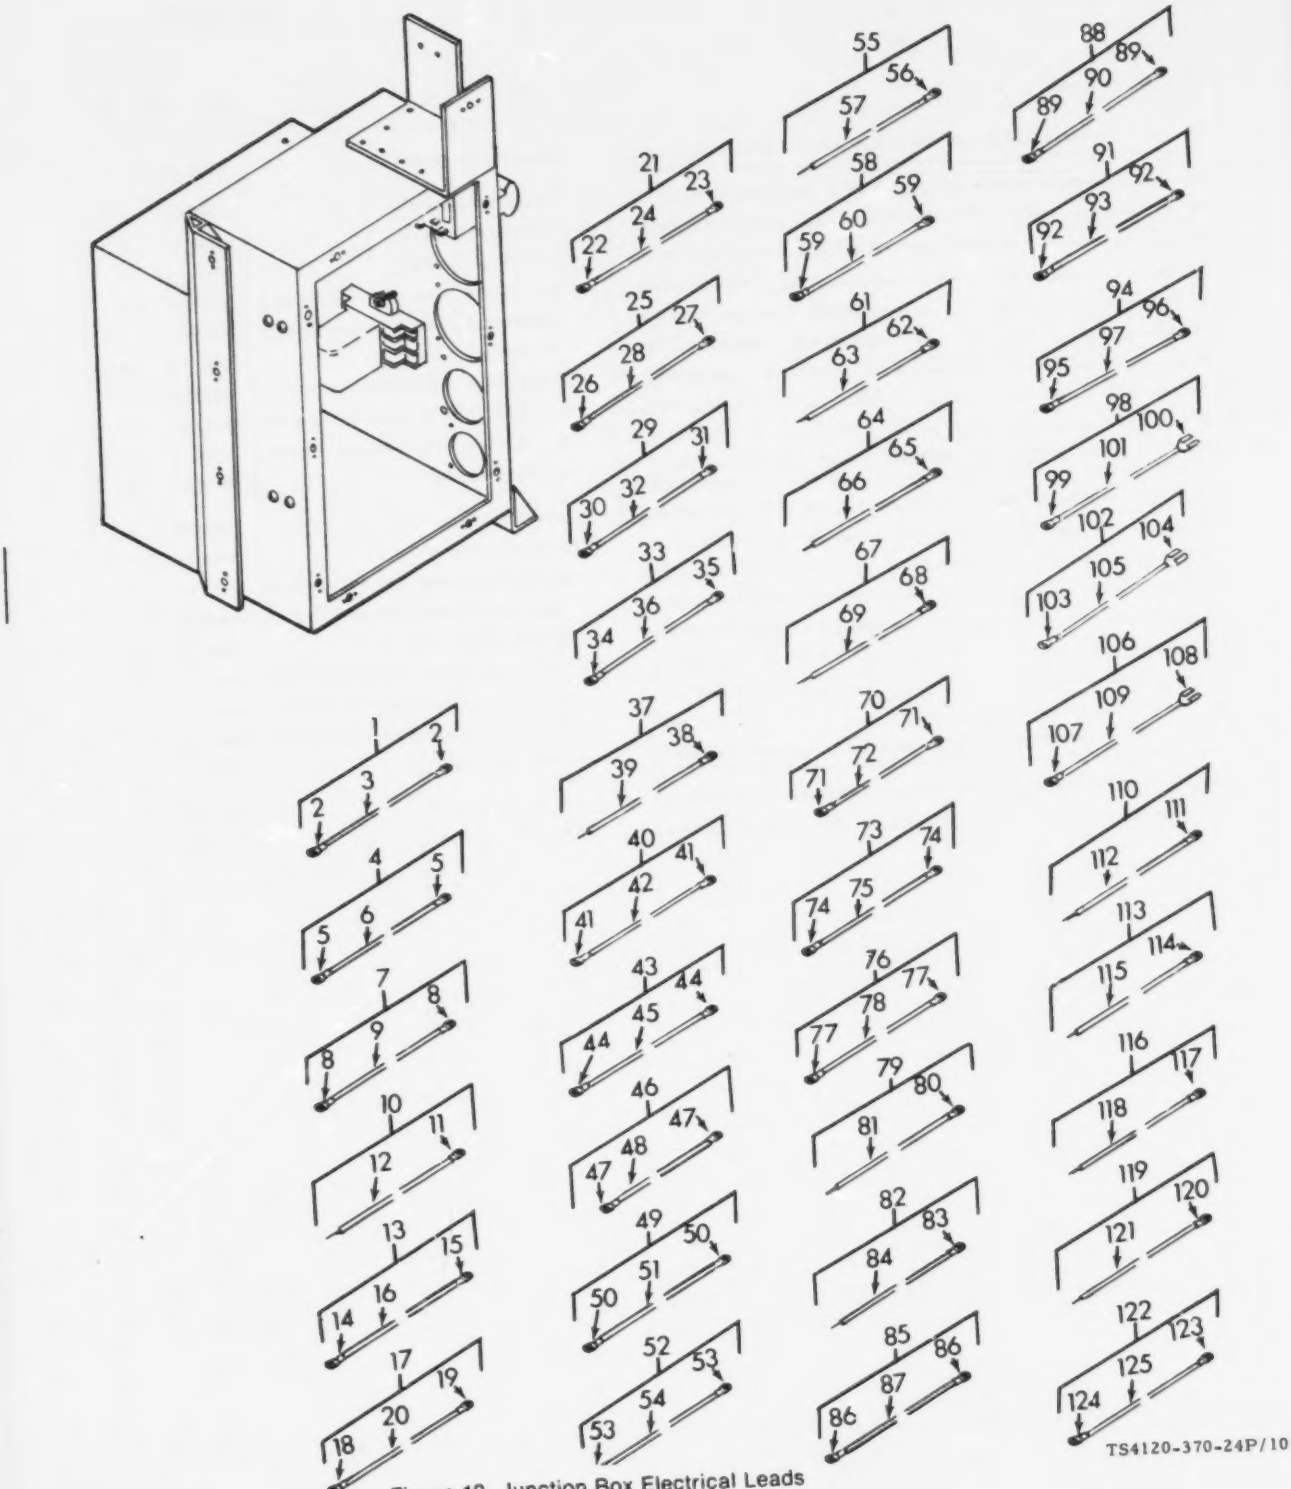

TS4120-370-24P/10

Figure 10. Junction Box Electrical Leads

SECTION II

(1) ILLUSTRATION (a) FIG NO	(b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	1	XB000		97403	13225E0155-1	.LEAD,ELECTRICAL, TB1-3 TO TB1-6	EA	1
10	2	PAOZZ	5940-00-230-0513	96906	MS25036-154	..TERMINAL,LUG	EA	2
10	3	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	4	XB000		97403	13225E0155-2	.LEAD,ELECTRICAL, TB1-2 TO TB1-5	EA	1
10	5	PAOZZ	5940-00-230-0515	96906	MS25C36-184	..TERMINAL,LUG	EA	2
10	6	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	7	XB000		97403	13225E0155-3	.LEAD,ELECTRICAL, TB1-1 TO TB1-4	EA	1
10	8	PAOZZ	5940-00-230-0515	96906	MS25036-154	..TERMINAL,LUG	EA	2
10	9	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	10	XB000		97403	13225E0155-4	.LEAD,ELECTRICAL, TB1-4 TO C81-C	EA	1
10	11	PAOZZ	5940-00-230-0515	96906	MS25036-154	..TERMINAL,LUG	EA	1
10	12	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	13	XB000		97403	13225E0155-5	.LEAD,ELECTRICAL	EA	1
10	14	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	1
10	15	PAOZZ	5940-00-230-0515	96906	MS25C36-154	..TERMINAL,LUG	EA	1
10	16	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	17	XB000		97403	13225E0155-6	.LEAD,ELECTRICAL, K1-B1 TO TB1-2	EA	1
10	18	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	1
10	19	PAOZZ	5940-00-230-0515	96906	MS25C36-154	..TERMINAL,LUG	EA	1
10	20	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	21	XB000		97403	13225E0155-7	.LEAD,ELECTRICAL, K1-A1 TO TB1-1	EA	1
10	22	PAOZZ	5940-00-143-4780	96906	MS25C36-108	..TERMINAL,LUG	EA	1
10	23	PAOZZ	5940-00-230-0515	96906	MS25C36-154	..TERMINAL,LUG	EA	1
10	24	MOOZZ		97403	13225E0155/3	..WIRE,ELECTRICAL, AWG 14,MFD FROM MS086/1-14-9	FT	1
10	25	XB000		97403	13225E0155-8	.LEAD,ELECTRICAL, TB1-3 TO K7-C2	EA	1
10	26	PAOZZ	5940-00-143-4777	96906	MS25C36-157	..TERMINAL,LUG	EA	1
10	27	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	1
10	28	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	1
10	29	XB000		97403	13225E0155-9	.LEAD,ELECTRICAL, TB1-2 TO K7-B2	EA	1
10	30	PAOZZ	5940-00-143-4777	96906	MS25C36-157	..TERMINAL,LUG	EA	1
10	31	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	1
10	32	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	1
10	33	XB000		97403	13225E0155-10	.LEAD,ELECTRICAL, TB1-1 TO K7-A2	EA	1
10	34	PAOZZ	5940-00-143-4777	96906	MS25C36-157	..TERMINAL,LUG	EA	1
10	35	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	1
10	36	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	1
10	37	XB000		97403	13225E0155-11	.LEAD,ELECTRICAL, K6-5 TO TB2-3	EA	1
10	38	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	1
10	39	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	40	XB000		97403	13225E0155-12	.LEAD,ELECTRICAL, TB2-3 TO TB2-2	EA	1

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	41	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	2
10	42	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	1
10	43	XBOOO		97403	13225E0155-11	.LEAD,ELECTRICAL, TB2-2 TO K9-X1	EA	1
10	44	PAOZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG	EA	2
10	45	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	46	XBOOO		97403	13225E0155-14	.LEAD,ELECTRICAL, TB2-2 TO TB2-1	EA	1
10	47	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	2
10	48	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	1
10	49	XBOOO		97403	13225E0155-15	.LEAD,ELECTRICAL, K7-X1 TO TB2-1	EA	1
10	50	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	2
10	51	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	52	XBOOO		97403	13225E0155-16	.LEAD,ELECTRICAL, K8-X2 TO TB2-2	EA	1
10	53	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	2
10	54	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	55	XBOOO		97403	13225E0155-17	.LEAD,ELECTRICAL, TB2-1 TO A1-FL3	EA	1
10	56	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	1
10	57	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	1
10	58	XBOOO		97403	13225E0155-18	.LEAD,ELECTRICAL, K1-X1 TO TB2-1	EA	1
10	59	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	2
10	60	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	61	XBOOO		97403	13225E0155-19	.LEAD,ELECTRICAL, K6-2 TO K10-6	EA	1
10	62	PAOZZ	5940-00-283-5280	96906	MS25C36-106	..TERMINAL,LUG	EA	1
10	63	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	1
10	64	XBOOO		97403	13225E0155-20	.LEAD,ELECTRICAL, K7-X2 TO K8-2	EA	1
10	65	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	1
10	66	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	1
10	67	XBOOO		97403	13225E0155-21	.LEAD,ELECTRICAL, K6-3 TO K9-X2	EA	1
10	68	PAOZZ	5940-00-143-4774	96906	MS25C36-153	..TERMINAL,LUG	EA	1
10	69	MOOZZ		97403	13225E0155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9	FT	2
10	70	XBOOO		97403	13225E0155-22	.LEAD,ELECTRICAL	EA	1
10	71	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	2
10	72	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	2
10	73	XBOOO		97403	13225E0155-23	.LEAD,ELECTRICAL, K7-B2 TO K9-B1	EA	1
10	74	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	2
10	75	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	2
10	76	XBOOO		97403	13225E0155-24	.LEAD,ELECTRICAL, K7-C2 TO K9-C1	EA	1
10	77	PAOZZ	5940-00-143-4794	96906	MS25C36-112	..TERMINAL,LUG	EA	2
10	78	MOOZZ		97403	13225E0155/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9	FT	2
10	79	XBOOO		97403	13225E0155-25	.LEAD,ELECTRICAL, T-X-2 TO A1-FL1	EA	1
10	80	PAOZZ	5940-00-283-5280	96906	MS25C36-106	..TERMINAL,LUG	EA	1

(1) ILLUSTRATION (a) FIG NO	(b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	81	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	82	XBOOO		97403	13225E0199-26	.LEAD,ELECTRICAL, Y-B-1 TO A1-FL2.....	EA	1
10	83	PAOZZ	5940-00-283-5280	96906	MS25036-106	..TERMINAL,LUG.....	EA	1
10	84	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	85	XBOOO		97403	13225E0199-27	.LEAD,ELECTRICAL.....	EA	1
10	86	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	2
10	87	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	88	XBOOO		97403	13225E0199-28	.LEAD,ELECTRICAL, K9-B1 TO K8-B2.....	EA	1
10	89	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	2
10	90	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	91	XBOOO		97403	13225E0199-29	.LEAD,ELECTRICAL, K9-C1 TO K8-C2.....	EA	1
10	92	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	2
10	93	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	94	XBOOO		97403	13225E0199-30	.LEAD,ELECTRICAL, K9-X1 TO J8 GRD.....	EA	1
10	95	PAOZZ	5940-00-143-4774	96906	MS25036-133	..TERMINAL,LUG.....	EA	1
10	96	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	1
10	97	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	98	XBOOO		97403	13225E0199-31	.LEAD,ELECTRICAL, K9-A2 TO CB1-C1.....	EA	1
10	99	PAOZZ	5940-00-143-4794	96906	MS25036-112	..TERMINAL,LUG.....	EA	1
10	100	PAOZZ		97403	13211E0288	..TERMINAL, QUICK DISCONNECT.....	EA	1
10	101	HOOZZ		97403	13225E0199/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9.....	FT	1
10	102	XBOOO		97403	13225E0199-32	.LEAD,ELECTRICAL, K9-B2 TO CB1-B1.....	EA	1
10	103	PAOZZ	5940-00-143-4794	96906	MS25036-112	..TERMINAL,LUG.....	EA	1
10	104	PAOZZ	5940-00-859-4475	97403	13211E0288	..TERMINAL, QUICK DISCONNECT.....	EA	1
10	105	HOOZZ		97403	13225E0199/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9.....	FT	2
10	106	XBOOO		97403	13225E0199-33	.LEAD,ELECTRICAL, K9-C2 TO CB1-A1.....	EA	1
10	107	PAOZZ	5940-00-143-4794	96906	MS25036-112	..TERMINAL,LUG.....	EA	1
10	108	PAOZZ	5940-00-859-4475	97403	13211E0288	..TERMINAL, QUICK DISCONNECT.....	EA	1
10	109	HOOZZ		97403	13225E0199/2	..WIRE,ELECTRICAL, AWG 10,MFD FROM MS086/1-10-9.....	FT	1
10	110	XBOOO		97403	13225E0199-34	.LEAD,ELECTRICAL, K8-4 TO K1-B1.....	EA	1
10	111	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	1
10	112	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	113	XBOOO		97403	13225E0199-36	.LEAD,ELECTRICAL, K6-4 TO K10-A.....	EA	1
10	114	PAOZZ	5940-00-283-5280	96906	MS25036-106	..TERMINAL,LUG.....	EA	1
10	115	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	116	XBOOO		97403	13225E0199-37	.LEAD,ELECTRICAL, K6-1 TO K10-9.....	EA	1
10	117	PAOZZ	5940-00-283-5280	96906	MS25036-106	..TERMINAL,LUG.....	EA	1
10	118	HOOZZ		97403	13225E0199/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	119	XBOOO		97403	13225E0199-45	.LEAD,ELECTRICAL, K6-4 TO TB2-10.....	EA	1
10	120	PAOZZ	5940-00-143-4774	96906	MS25036-133	..TERMINAL,LUG.....	EA	1

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	121	MOOZZ		97403	13225E8155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1
10	122	XBOOO		97403	13225E819-46	.LEAD,ELECTRICAL, K10-B TO K1-C1.....	EA	1
10	123	PAOZZ	5940-00-283-5288	96906	MS25036-186	..TERMINAL,LUG.....	EA	1
10	124	PAOZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....	EA	1
10	125	MOOZZ		97403	13225E8155/4	..WIRE,ELECTRICAL, AWG 16,MFD FROM MS086/1-16-9.....	FT	1

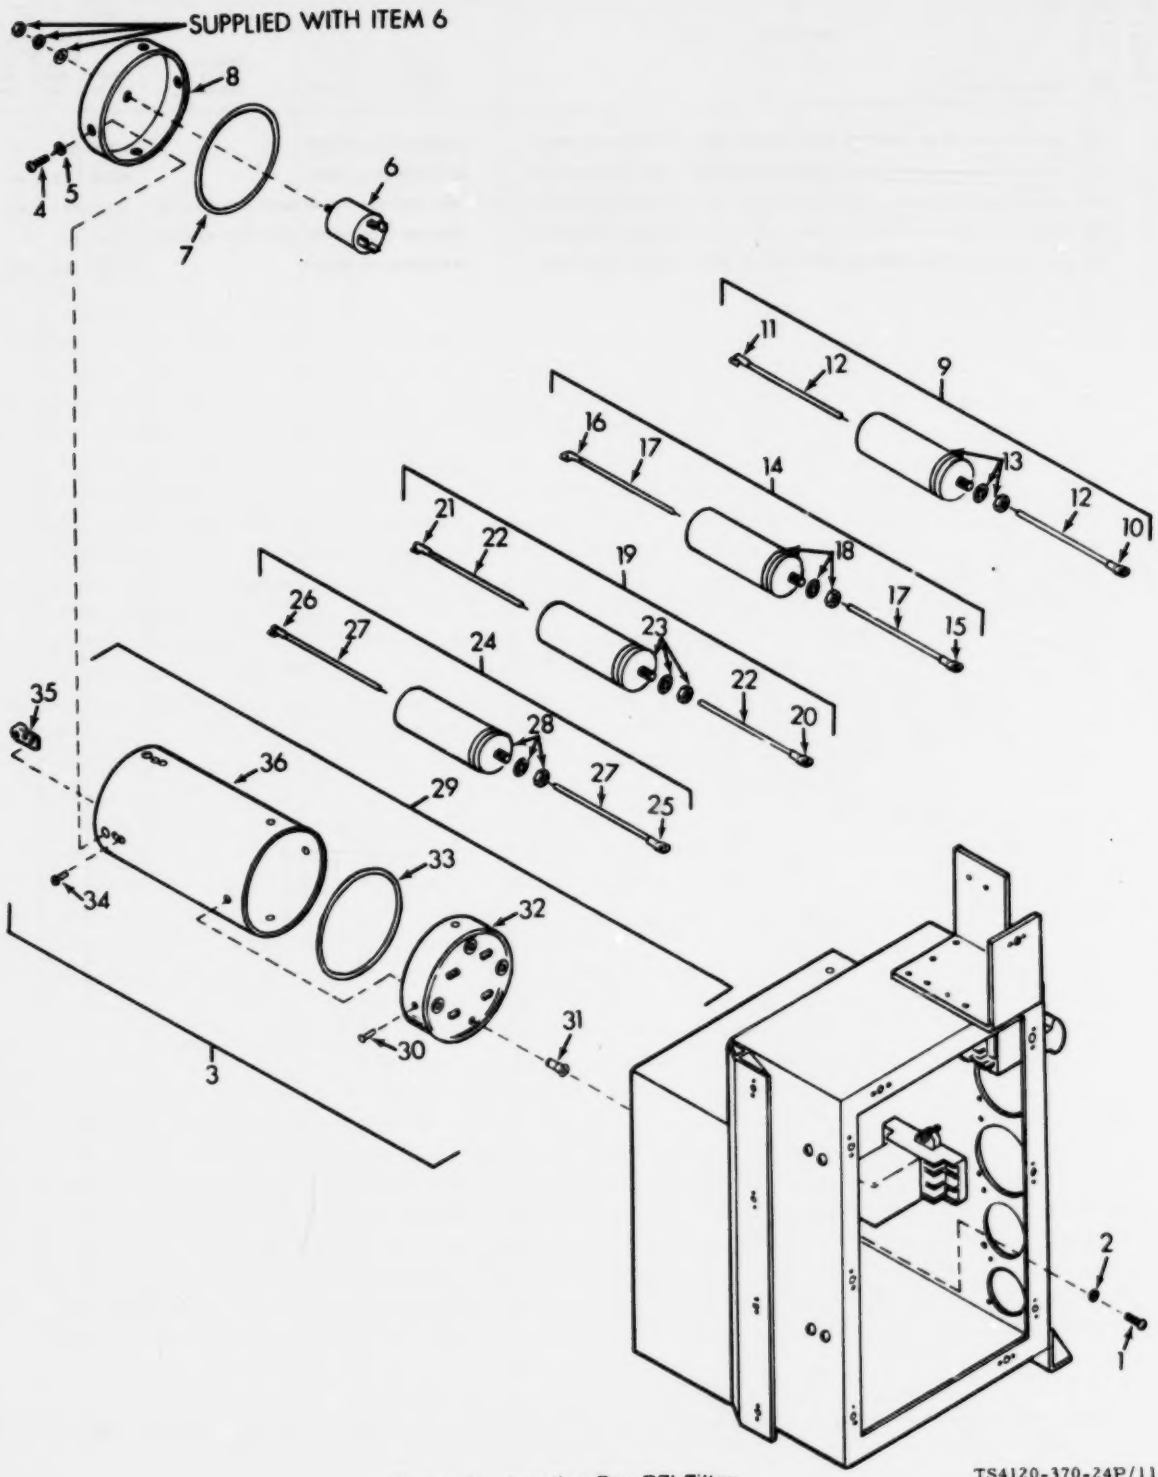

Figure 11. Junction Box RFI Filter

TS4120-370-24P/11

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
11	1	PAOZZ	5305-00-993-1848	96906	MS35207-265	SCREW, MACHINE	EA	4
11	2	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	4
11	3	AOOOZ	4130-01-168-4230	97403	13216E4511	FILTER ASSEMBLY, RFI . . . . . DMD	EA	1
11	3	AOOOZ		97403	13226E9445	INTERFERENCE FILTER ASSEMBLY . . . . . EAZ, EAY	EA	1
11	4	PAOZZ	5305-00-984-4988	96906	MS35206-228	SCREW, MACHINE	EA	4
11	5	PAOZZ	5310-00-082-1404	96906	MS27183-6	WASHER, FLAT	EA	4
11	6	PAOZZ	5961-00-913-1749	97403	13211E3791	SEMICONDUCTOR DEVICE	EA	1
11	7	PAOZZ	5999-01-097-3411	97403	13216E4515	SHIELDING GASKET, ELECTRICAL	EA	1
11	8	XBOZZ		97403	13216E4521	END CAP, TOP	EA	1
11	9	XBOOO		97403	13216E4516-1	FILTER ASSEMBLY, BAND SUPPRESSION (FL1) . . . . . DMD	EA	1
11	9	XBOOO		97403	13226E9446-1	BAND SUPPRESSION FILTER WITH LEADS (FL1) . . . . . EAZ, EAY	EA	1
11	10	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	1
11	11	PAOZZ	5940-00-859-4475	97403	13211E8288	TERMINAL, QUICK DISCONNECT	EA	1
11	12	MOOZZ		97403	13216E4516/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . DMD	FT	3
11	12	MOOZZ		97403	13226E9446/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . EAZ, EAY	EA	3
11	13	PAOZZ	5915-01-135-8161	97403	13216E4517	FILTER, RADIO FREQUENCY BAND SUPPRESSION	EA	1
11	14	XBOOO		97403	13216E4516-2	FILTER ASSEMBLY, BAND SUPPRESSION (FL2) . . . . . DMD	EA	1
11	14	XBOOO		97403	13226E9446-2	BAND SUPPRESSION FILTER WITH LEADS (FL2) . . . . . EAZ, EAY	EA	1
11	15	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	1
11	16	PAOZZ	5940-00-859-4475	97403	13211E8288	TERMINAL, QUICK DISCONNECT	EA	1
11	17	MOOZZ		97403	13216E4516/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . DMD	FT	3
11	17	MOOZZ		97403	13226E9446/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . EAZ, EAY	FT	3
11	18	PAOZZ	5915-01-135-8161	97403	13216E4517	FILTER, RADIO FREQUENCY BAND SUPPRESSION	EA	1
11	19	XBOOO		97403	13216E4516-3	FILTER ASSEMBLY, BAND SUPPRESSION (FL3) . . . . . DMD	EA	1
11	19	XBOOO		97403	13226E9446-3	BAND SUPPRESSION FILTER WITH LEADS (FL3) . . . . . EAZ, EAY	EA	1
11	20	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	1
11	21	PAOZZ	5940-00-859-4475	97403	13211E8288	TERMINAL, QUICK DISCONNECT	EA	1
11	22	MOOZZ		97403	13216E4516/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . DMD	FT	2
11	22	MOOZZ		97403	13226E9446/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . EAZ, EAY	FT	3
11	23	PAOZZ	5915-01-135-8161	97403	13216E4517	FILTER, RADIO FREQUENCY BAND SUPPRESSION	EA	1
11	24	XBOOO		97403	13216E4516-4	FILTER ASSEMBLY, BAND SUPPRESSION (FL4) . . . . . DMD	EA	1
11	24	XBOOO		97403	13226E9446-4	BAND SUPPRESSION FILTER WITH LEADS (FL4) . . . . . EAZ, EAY	EA	1
11	25	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	1
11	26	PAOZZ	5940-00-859-4475	97403	13211E8288	TERMINAL, QUICK DISCONNECT	EA	1
11	27	MOOZZ		97403	13216E4516/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . DMD	FT	2
11	27	MOOZZ		97403	13226E9446/3	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9 . . . . . EAZ, EAY	FT	2
11	28	PAOZZ	5915-01-135-8161	97403	13216E4517	FILTER, RADIO FREQUENCY BAND SUPPRESSION	EA	1
11	29	XBOOO		97403	13216E4512	TUBE ASSEMBLY	EA	1
11	30	PAOZZ	5320-00-882-8388	97403	13214E3789-3	RIVET, BLIND	EA	4
11	31	PAOZZ	5310-01-162-3992	80205	NAS1321H3KB80	NUT, PLAIN, BLIND RIVET	EA	4
11	32	XBOZZ		97403	13216E4512-2	END CAP	EA	1
11	33	PAOZZ	5999-01-097-3411	97403	13216E4515	SHIELDING GASKET, ELECTRICAL	EA	1
11	34	PAOZZ	5320-00-323-3984	07707	AK41H	RIVET, BLIND	EA	8
11	35	PAOZZ	5310-01-096-6975	75237	F39156-06	NUT, SELF-LOCKING, PLATE	EA	4
11	36	XBOZZ		97403	13216E4512-1	TUBE	EA	1

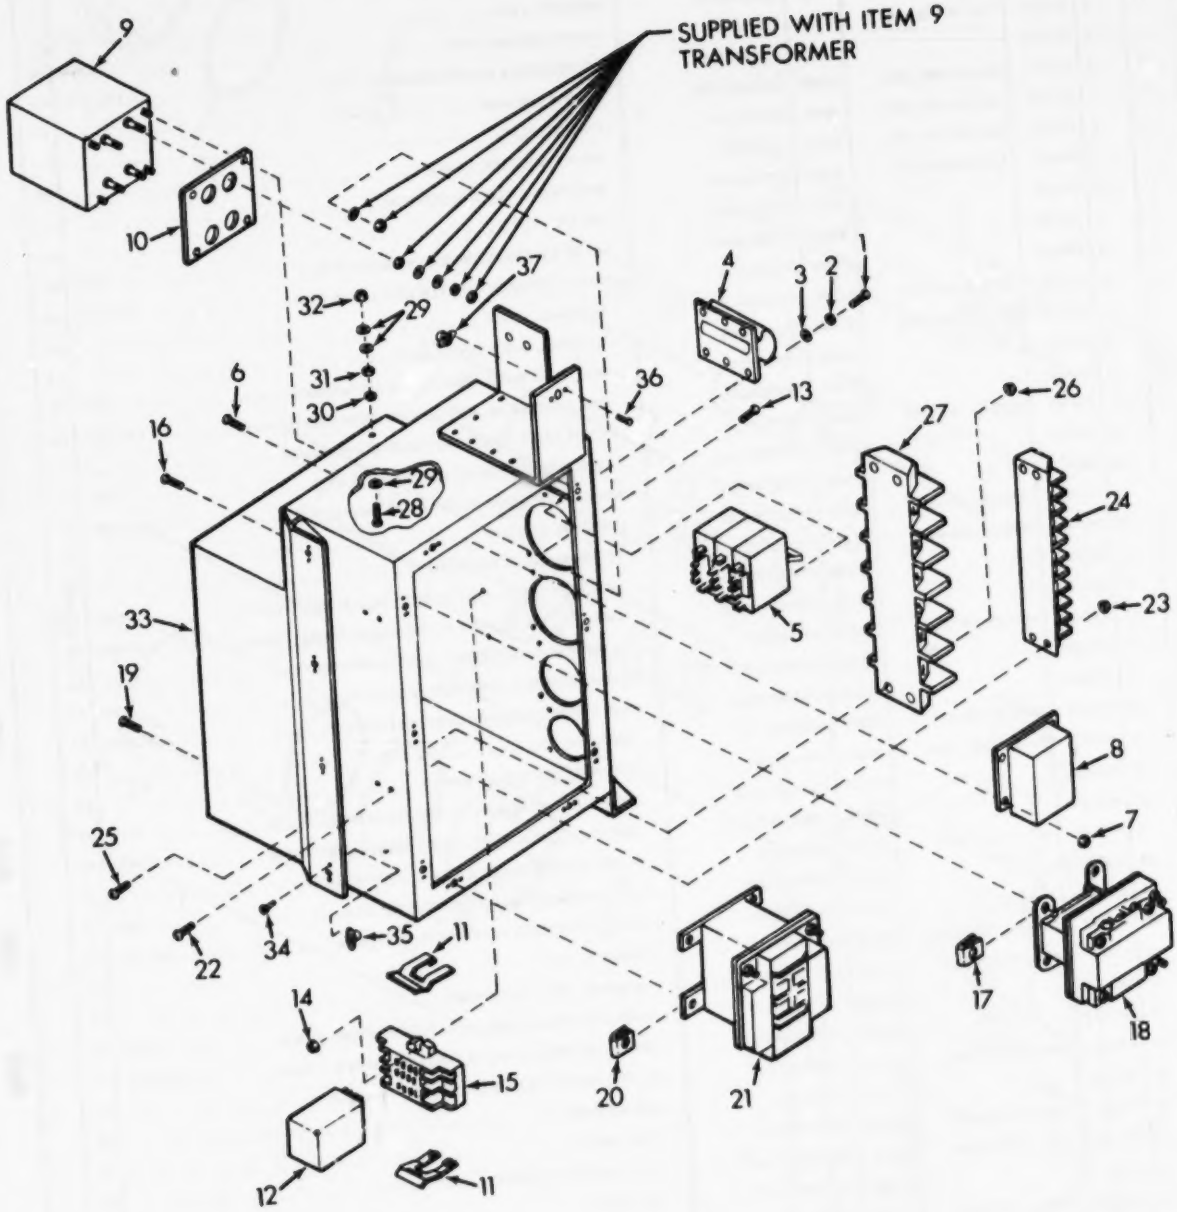

Figure 12. Junction Box Internal Parts

TS4120-370-24P/12

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
12	1	PAOZZ	5305-00-984-4984	96906	MS35206-227	SCREW, MACHINE	EA	6
12	2	PAOZZ	5310-00-045-4007	96906	MS35338-41	WASHER, LOCK	EA	6
12	3	PAOZZ	5310-00-082-1404	96906	MS27183-6	WASHER, FLAT	EA	6
12	4	PAOZZ	5925-01-160-3915	97403	13217E6793	COVER, CIRCUIT BREAKER	EA	1
12	5	PAOZZ	5925-01-100-0970	97403	13216E6205-6	CIRCUIT BREAKER ..... DMD, EAZ	EA	1
12	5	PAOZZ		97403	13216E6205-5	CIRCUIT BREAKER ..... EAY	EA	1
12	6	PAOZZ	5305-00-984-6191	96906	MS35206-243	SCREW, MACHINE	EA	4
12	7	PAOZZ	5310-00-811-3494	96906	MS21044N08	NUT, SELF-LOCKING, HEXAGON	EA	4
12	8	PAOZZ	5945-01-160-3911	97403	13225E8165	RELAY, TIME DELAY	EA	1
12	9	PAOZZ	5950-00-433-6017	97403	13214E3818-6	TRANSFORMER, POWER ..... DMD, EAZ	EA	1
12	9	PAOZZ		97403	13214E3818-5	TRANSFORMER, POWER ..... EAY	EA	1
12	10	PAOZZ	5330-01-095-5751	97403	13218E9960	GASKET	EA	1
12	11	XDOZZ		97403	13225E8186	CLIP, SPRING TENSION	EA	2
12	12	PAOZZ	5945-01-176-6960	97403	13225E8166	RELAY, CONTROL ..... DMD, EAZ	EA	1
12	12	PAOZZ		97403	13225E8201	RELAY, CONTROL ..... EAY	EA	1
12	13	PAOZZ	5305-00-958-0662	96906	MS35207-231	SCREW, MACHINE	EA	2
12	14	PAOZZ	5310-00-081-8087	96906	MS21044N06	NUT, SELF-LOCKING, HEXAGON	EA	2
12	15	XBOZZ		97403	13225E8167	SOCKET, RELAY CONTROL	EA	1
12	16	PAOZZ	5305-00-984-6191	96906	MS35206-243	SCREW, MACHINE	EA	12
12	17	PAOZZ	5310-00-917-6365	96906	MS90724-29	NUT, SHEET SPRING	EA	12
12	18	PAOZZ	5945-00-549-6348	96906	MS24192-D1	RELAY, ELECTROMAGNET	EA	3
12	19	PAOZZ	5305-00-984-6191	96906	MS35206-243	SCREW, MACHINE	EA	4
12	20	PAOZZ	5310-00-917-6365	96906	MS90724-29	NUT, SHEET SPRING	EA	4
12	21	PAOZZ	5945-00-826-2218	96906	MS24193-D1	RELAY, ELECTROMAGNET	EA	1
12	22	PAOZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	4
12	23	PAOZZ	5310-00-877-5797	96906	MS21044N3	NUT, SELF-LOCKING, HEXAGON	EA	4
12	24	XBOZZ		81349	TY39TB10	TERMINAL BOARD	EA	1
12	25	PAOZZ	5305-00-993-1851	96906	MS35207-267	SCREW, MACHINE	EA	4
12	26	PAOZZ	5310-00-877-5797	96906	MS21044N3	NUT, SELF-LOCKING, HEXAGON	EA	4
12	27	XBOZZ		97403	13214E4013	TERMINAL BOARD	EA	1
12	28	PAOZZ	5305-00-993-1851	96906	MS35207-267	SCREW, MACHINE	EA	1
12	29	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	3
12	30	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	1
12	31	PAOZZ	5310-00-934-9751	96906	MS35650-302	NUT, PLAIN, HEXAGON	EA	1
12	32	PAOZZ	5310-00-877-5797	96906	MS21044N3	NUT, SELF-LOCKING, HEXAGON	EA	1
12	33	XBOOO		97403	13225E8077	JUNCTION BOX	EA	1
12	34	PAOZZ	5320-00-117-6939	96906	MS20426AD3-5	RIVET, SOLID	EA	28
12	35	PAOZZ	5310-00-623-5989	80205	NAS1031A3	NUT, SELF-LOCKING, PLATE	EA	14
12	36	PAOZZ	5320-00-323-3984	07707	AK41H	RIVET, BLIND	EA	2
12	37	PAOZZ	5310-00-089-6304	97403	13211E8382	NUT, SHEET SPRING	EA	1

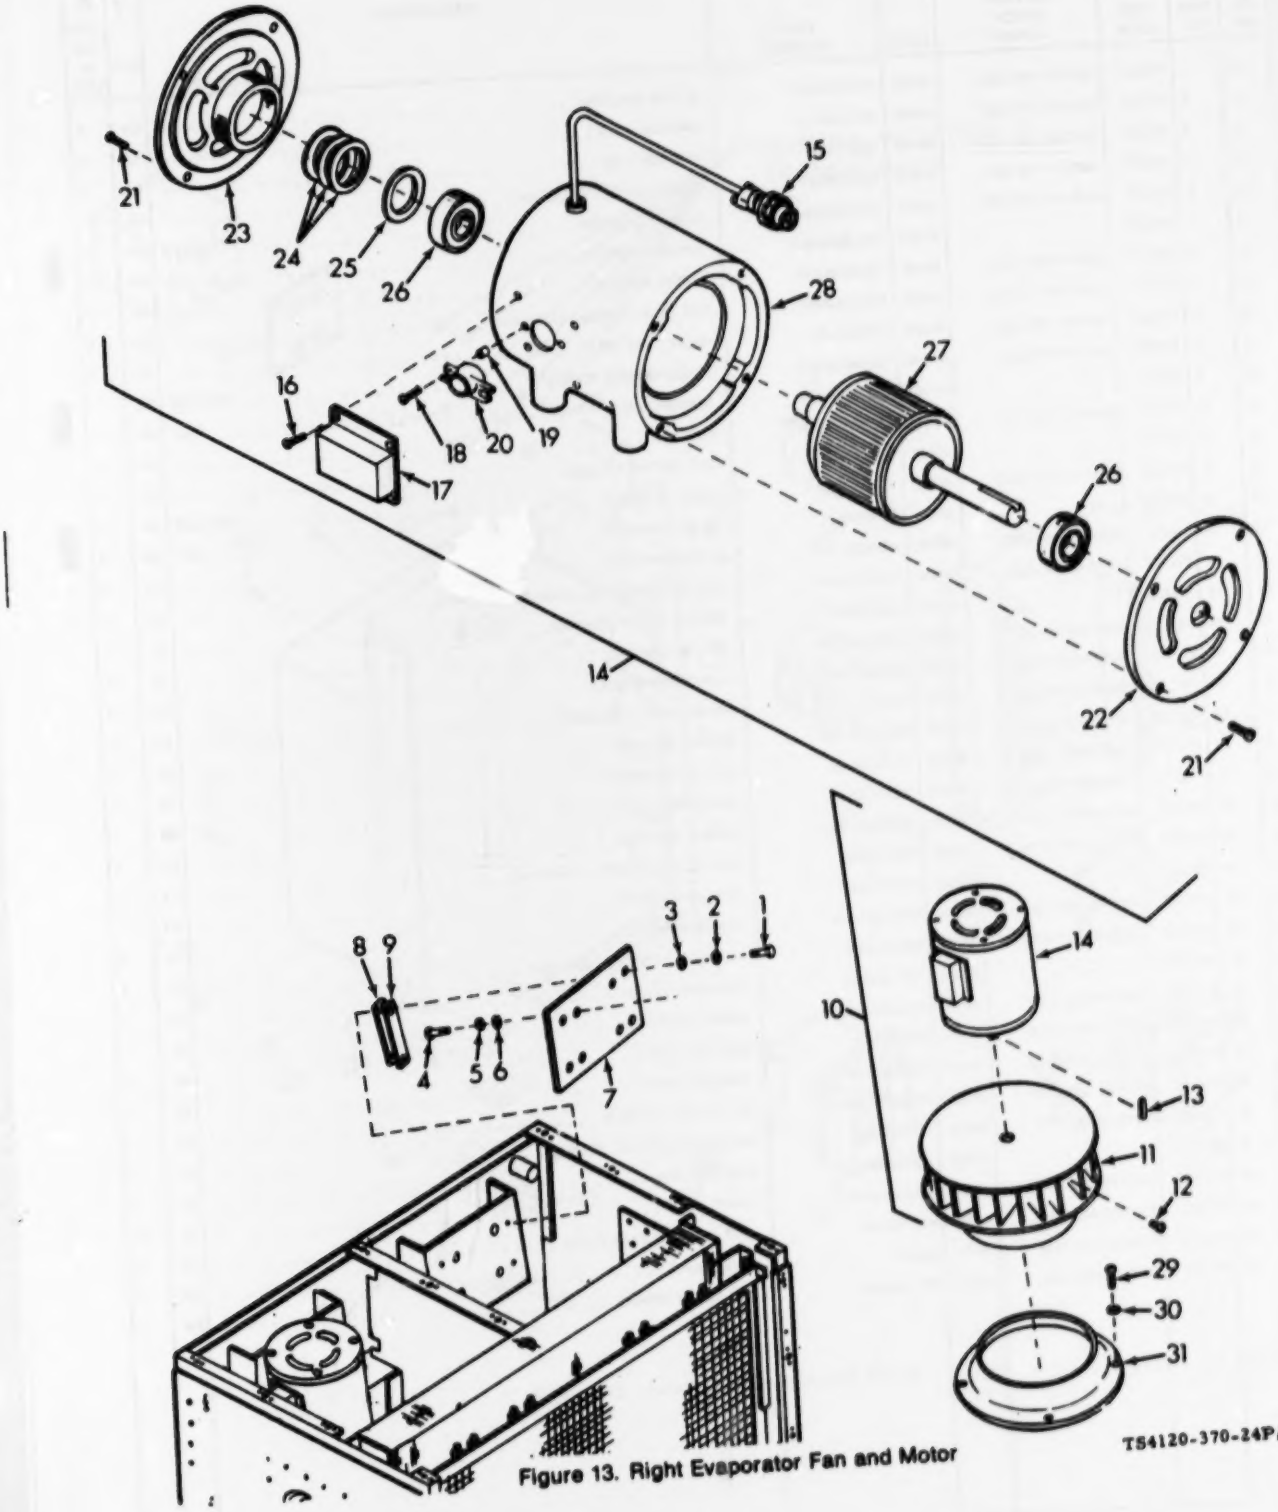

Figure 13. Right Evaporator Fan and Motor

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 04 EVAPORATOR FANS, MOTORS, AND HEATERS		
13	1	PAOZZ	5305-00-267-8974	96906	MS90726-8	SCREW, CAP HEXAGON HEAD	EA	4
13	2	PAOZZ	5310-00-582-5965	96906	MS35338-44	WASHER, LOCK	EA	4
13	3	PAOZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT	EA	4
13	4	PAOZZ	5306-00-225-9088	96906	MS90726-33	BOLT, MACHINE	EA	4
13	5	XDOZZ		96906	MS35338-45	WASHER, LOCK	EA	4
13	6	PAOZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT	EA	4
13	7	XBOZZ		97403	13225E8096	PLATE, EVAPORATOR MOTOR	EA	1
13	8	XBOZZ		97403	13225E8096-3	SHIM	EA	V
13	9	XBOZZ		97403	13225E8096-4	SHIM	EA	V
13	10	AOOOO		97403	13225E8060	MOTOR AND FAN ASSEMBLY, EVAPORATOR-RH DMD	EA	1
13	11	PAOOO	4140-01-160-3920	97403	13225E8084	IMPELLER, FAN, CENTRIFUGAL EVAPORATOR	EA	1
13	12	PAOZZ	5305-01-082-2739	97403	13216E4535	SETSCREW CUP POINT	EA	2
13	13	PAOZZ	5315-00-730-4572	96906	MS20066-146	KEY, MACHINE	EA	1
13	14	PAOFF	6105-01-170-7101	97403	13225E8080-1	MOTOR, ALTERNATING CURRENT DMD, EAZ	EA	1
13	14	PAOFF		97403	13225E8080-2	MOTOR, ALTERNATING CURRENT EAY	EA	1
13	15	PAOZZ	5935-00-755-3624	96906	MS3106R14S-7P	CONNECTOR, PLUG, ELECTRICAL	EA	1
13	16	XBOZZ	5305-01-154-0337	64731	02-009264-002	SCREW, SELF-LOCKING	EA	4
13	17	XBOZZ		64731	02-014765-000	COVER, PROTECTOR	EA	1
13	18	XBFZZ		64731	02-009264-017	SCREW, PROTECTOR	EA	2
13	19	XBFZZ		64731	01-008498-031	SPACER, PROTECTOR	EA	2
13	20	PAFZZ	6680-01-155-5926	64731	01-008773-080	THERMOSTAT DMD, EAZ	EA	1
13	20	PAFZZ		64731	01-008773-032	THERMOSTAT EAY	EA	1
13	21	XDOZZ		64731	02-009264-001	SCREW, MOTOR	EA	8
13	22	XBOZZ		64731	02-013145-001	END BRACKET (REAR)	EA	1
13	23	XBOZZ		64731	02-013145-002	END BRACKET (FRONT)	EA	1
13	24	XBFZZ		64731	01-006424-009	SPACER WASHER, BEARING	EA	V
13	25	XBFZZ		64731	01-006189-016	LOADING SPRING BEARING	EA	1
13	26	PAFZZ	3110-00-136-4683	64731	02-010999-203	BEARING, BALL	EA	2
13	27	XAFZZ		64731	01-015119-000	ROTOR WITH SHAFT DMD, EAZ	EA	1
13	27	XAFZZ		64731	A1-015599-000	ROTOR WITH SHAFT EAY	EA	1
13	28	XAFZZ		64731	02-015113-001	FRAME WITH WOUND STATOR DMD, EAZ	EA	1
13	28	XAFZZ		64731	A1-021669-000	STATOR/FRAME ASSY EAY	EA	1
13	29	PAOZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	4
13	30	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	4
13	31	XBOZZ		97403	13225E8103	BELL, INLET, EVAPORATOR	EA	1

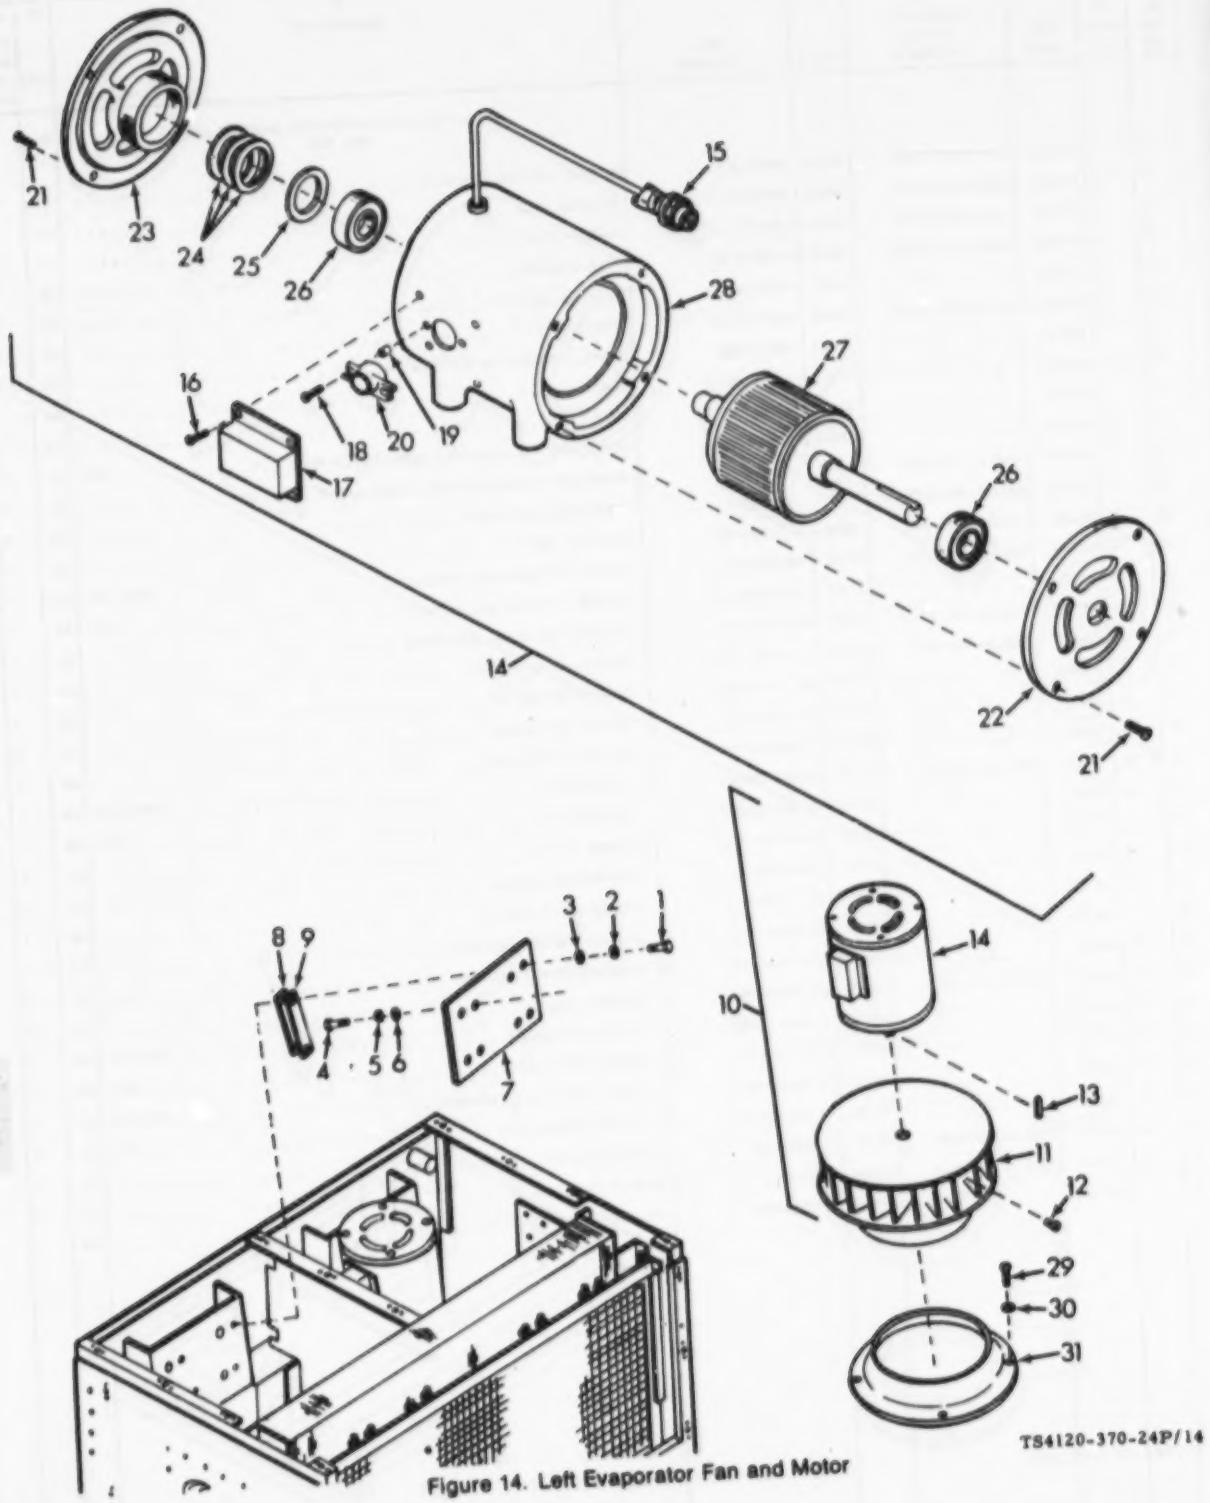

Figure 14. Left Evaporator Fan and Motor

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
14	1	PAOZZ	5305-00-267-8974	96906	MS90726-8	SCREW, CAP, HEXAGON HEAD	EA	4
14	2	PAOZZ	5310-00-582-5985	96906	MS35338-44	WASHER, LOCK	EA	4
14	3	PAOZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT	EA	4
14	4	PAOZZ	5306-00-225-8088	96906	MS90726-23	BOLT, MACHINE	EA	4
14	5	XDOZZ		96906	MS35338-45	WASHER, LOCK	EA	4
14	6	PAOZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT	EA	4
14	7	XBOZZ		97403	13225E8096	PLATE, EVAPORATOR MOTOR	EA	1
14	8	XBOZZ		97403	13225E8096-3	SHIM	EA	v
14	9	XBOZZ		97403	13225E8096-4	SHIM	EA	v
14	10	AOOOO		97403	13225E8156	MOTOR AND FAN ASSEMBLY, EVAPORATOR-LH . . . . . DMD	EA	1
14	11	PAOOO	4140-01-160-3921	97403	13225E8085	IMPELLER, FAN, CENTRIFUGAL EVAPORATOR	EA	1
14	12	PAOZZ	5305-01-082-2739	97403	13216E4535	SETSCREW CUP POINT	EA	2
14	13	PAOZZ	5315-00-730-4572	96906	MS20066-146	KEY, MACHINE	EA	1
14	14	PAOFF	6105-01-170-7101	97403	13225E8080-1	MOTOR, ALTERNATING CURRENT . . . . . DMD, EAZ	EA	1
14	14	PAOFF		97403	13225E8080-2	MOTOR, ALTERNATING CURRENT . . . . . EAY	EA	1
14	15	PAOZZ	5935-00-755-3624	96906	MS3106R14S-7P	CONNECTOR, PLUG, ELECTRICAL	EA	1
14	16	XBOZZ	5305-01-154-0337	64731	02-009264-002	SCREW, SELF-LOCKING	EA	4
14	17	XBOZZ		64731	02-014765-000	COVER, PROTECTOR	EA	1
14	18	XBFZZ		64731	02-009264-017	SCREW, PROTECTOR	EA	2
14	19	XBFZZ		64731	01-008498-031	SPACER, PROTECTOR	EA	2
14	20	PAFZZ	6680-01-155-5927	64731	01-068773-080	THERMOSTAT . . . . . DMD, EAZ	EA	1
14	20	PAFZZ		64731	01-008773-032	THERMOSTAT . . . . . EAY	EA	1
14	21	XDOZZ		64731	02-009264-001	SCREW, MOTOR	EA	8
14	22	XBOZZ		64731	02-013145-001	END BRACKET (REAR)	EA	1
14	23	XBOZZ		64731	02-013145-002	END BRACKET (FRONT)	EA	1
14	24	XBFZZ		64731	01-006424-009	SPACER WASHER, BEARING	EA	v
14	25	XBFZZ		64731	01-006189-016	LOADING SPRING BEARING	EA	1
14	26	PAFZZ	3110-00-136-4683	64731	02-010999-203	BEARING, BALL	EA	2
14	27	XAFZZ		64731	01-015119-000	ROTOR WITH SHAFT . . . . . DMD, EAZ	EA	1
14	27	XAFZZ		64731	01-015599-000	ROTOR WITH SHAFT . . . . . EAY	EA	1
14	28	XAFZZ		64731	02-015113-001	FRAME WITH WOUND STATOR . . . . . DMD, EAZ	EA	1
14	28	XAFZZ		64731	A1-021660-000	STATOR/FRAME ASSY . . . . . EAY	EA	1
14	29	PAOZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	4
14	30	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	4
14	31	XBOZZ		97403	13225E8103	BELL, INLET, EVAPORATOR	EA	1

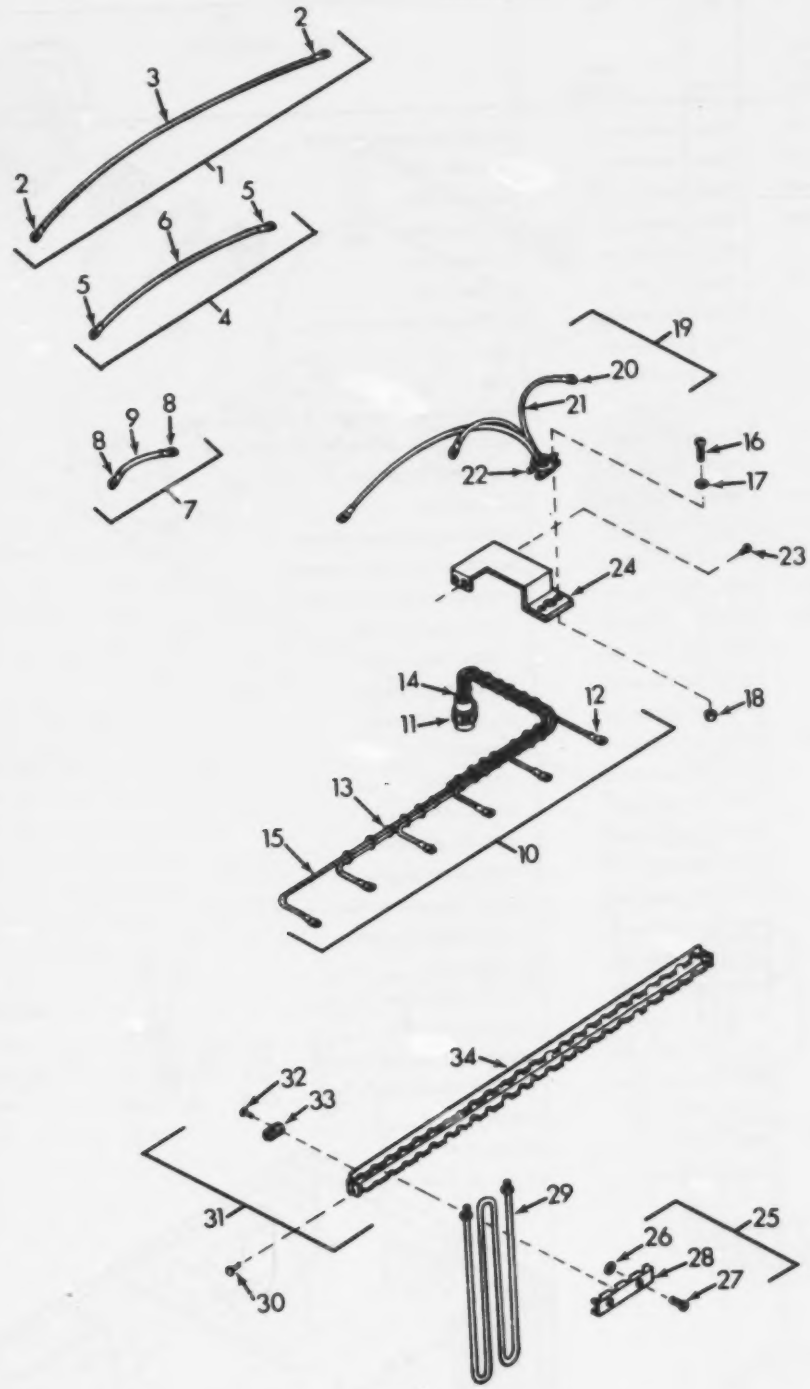

TS4120-370-24P/15

Figure 15. Heaters and Related Parts

SECTION II

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
15	1	XBOOO		97403	13225E8155-40	LEAD,ELECTRICAL, HR1-B TO HR8-B	EA	1
15	2	PAOZZ	5940-00-143-4780	96906	MS25036-108	.TERMINAL,LUG	EA	2
15	3	MOOZZ		97403	13225E8155/3	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	2
15	4	XBOOO		97403	13225E8155-39	LEAD,ELECTRICAL, HR2-B TO HR5-B	EA	1
15	5	PAOZZ	5940-00-143-4780	96906	MS25036-108	.TERMINAL,LUG	EA	2
15	6	MOOZZ		97403	13225E8155/3	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	2
15	7	XBOOO		97403	13225E8155-38	LEAD,ELECTRICAL, HR3-B TO HR6-B	EA	1
15	8	PAOZZ	5940-00-143-4780	96906	MS25036-108	.TERMINAL,LUG	EA	2
15	9	MOOZZ		97403	13225E8155/3	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	2
15	10	XBOOO		97403	13225E8147	WIRING HARNESS, P7 CONNECTOR	EA	1
15	11	PAOZZ	5935-00-816-8645	96906	MS3106R20-15P	.CONNECTOR,PLUG, ELECTRICAL	EA	1
15	12	PAOZZ	5940-00-143-4780	96906	MS25036-108	.TERMINAL,LUG	EA	6
15	13	MOOZZ		97403	13225E8147/6	.TAPE,IMPREGNATED, SIZE 3,MFD FROM MIL-T-43435TYPE-1-FINISH-B-NC-3	FT	3
15	14	MOOZZ		97403	13225E8147/4	.INSULATION,SLEEVING, 1 IN L,MFD FROM P23053/5-1C9-9	EA	6
15	15	MOOZZ		97403	13225E8147/2	.WIRE,ELECTRICAL, AWG 14,MFD FROM M5086/1-14-9	FT	21
15	16	PAOZZ	5305-00-984-8194	96906	MS35206-246	SCREW,MACHINE	EA	2
15	17	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER,FLAT	EA	2
15	18	PAOZZ	5310-00-889-2549	96906	MS21045-08	NUT,SELF-LOCKING, HEXAGON	EA	2
15	19	MOOOO		97403	13225E8172	WIRING ASSEMBLY, THERMOSTAT	EA	1
15	20	PAOZZ	5940-00-143-4794	96906	MS25036-112	.TERMINAL,LUG	EA	3
15	21	MOOZZ		97403	13225E8172/3	.WIRE,ELECTRICAL, AWG 12	FT	3
15	22	PAOZZ	5930-00-498-5895	97403	13214E4036	.SWITCH,THERMOSTATIC	EA	1
15	23	PAOZZ	5320-00-882-8388	97403	13214E3789-3	RIVET,BLIND	EA	2
15	24	XBOZZ		97403	13225E8105	BRACKET, HEATER THERMOSTAT	EA	1
15	25	XBOZZ		97403	13214E4072-1	CHANNEL	EA	6
15	26	PAOZZ	5310-00-880-9344	97403	13211E8337	.WASHER,LOCK	EA	1
15	27	PAOZZ	5305-01-096-5603	97403	13214E3744B37	.SCREW, PANEL FASTENER	EA	1
15	28	XBOZZ		97403	13214E4072-1/1	.CHANNEL	EA	1
15	29	PAOZZ	4540-00-488-8617	97403	13214E3981	HEATING ELEMENT, ELECTRICAL	EA	6
15	30	PAOZZ		97403	13214E3789-10	RIVET,BLIND	EA	4
15	31	XBOOO		97403	13225E8097	SUPPORT,HEATER, UPPER	EA	1
15	32	PAOZZ	5320-00-882-8388	97403	13214E3789-3	.RIVET,BLIND	EA	24
15	33	PAOZZ	5310-00-089-6304	97403	13211E8382	.NUT,SPEED SPRING	EA	12
15	34	XBOZZ		97403	13225E8097-1	.SUPPORT,HEATER	EA	1

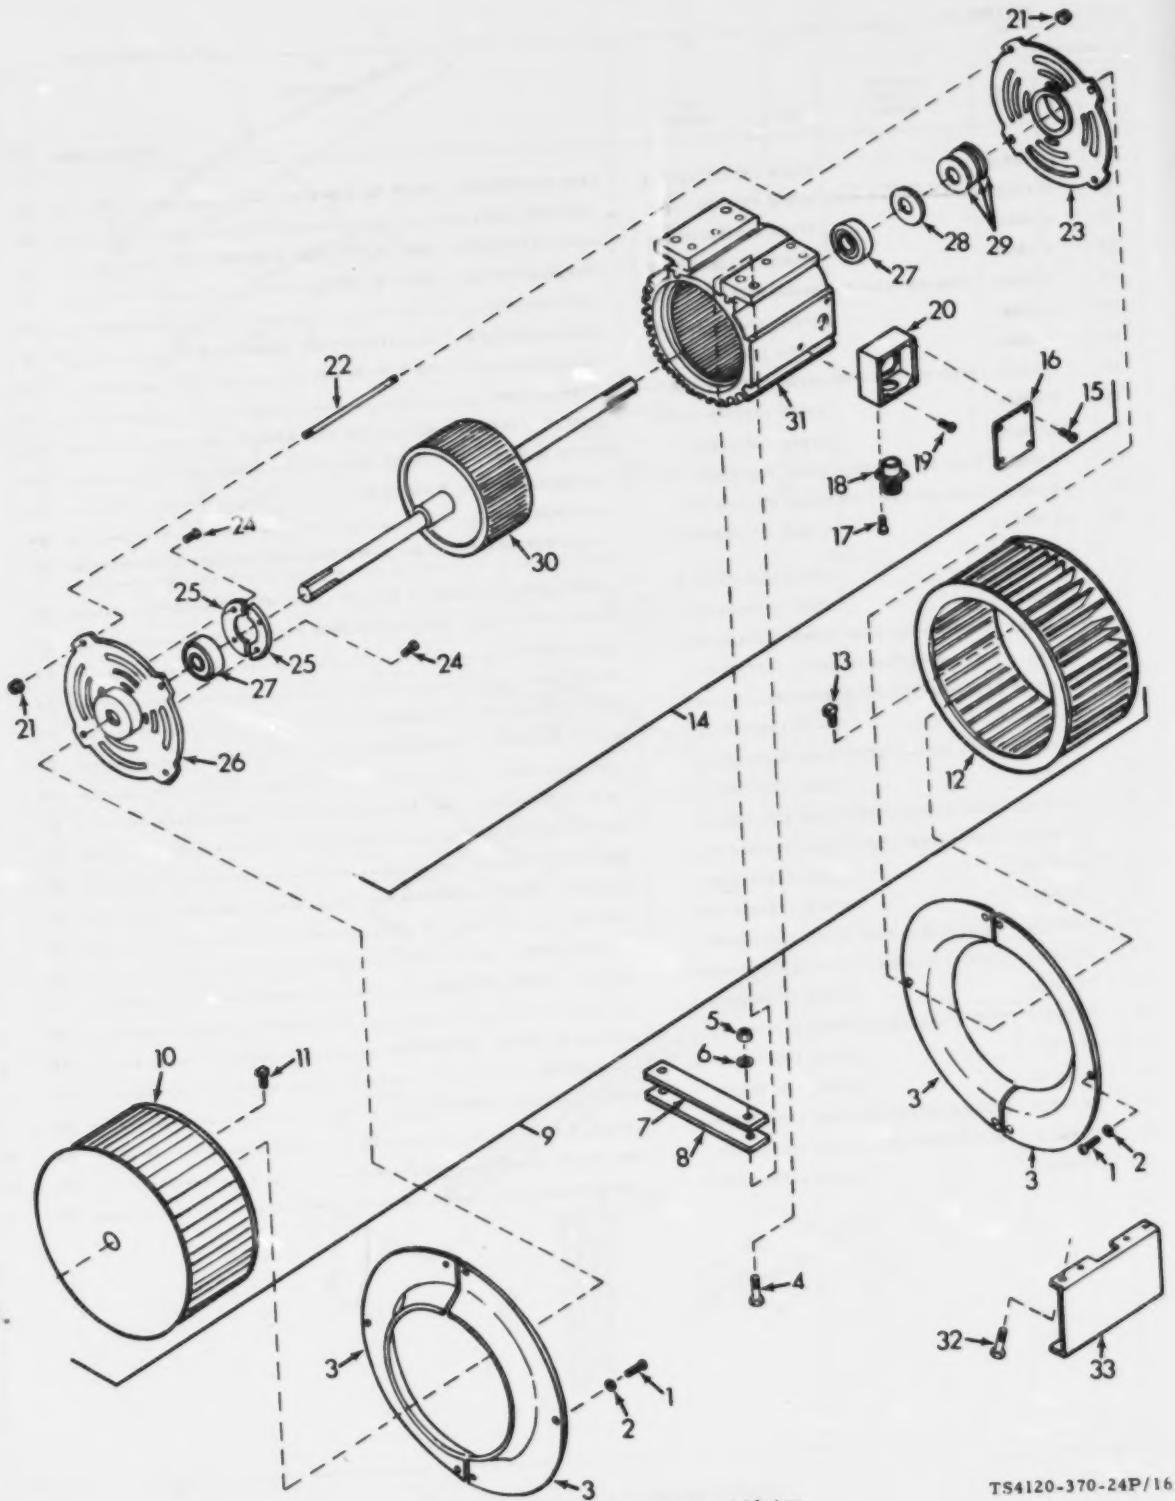

TS4120-370-24P/16

Figure 16. Condenser Fans and Motor

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 05 CONDENSER FANS, AND MOTORS		
16	1	PAOZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	12
16	2	PAOZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK	EA	12
16	3	XBOZZ		97403	13225E8104	BELL, INLET, CONDENSER	EA	4
16	4	PAOZZ	5306-00-144-4004	18876	802214	BOLT, MACHINE	EA	4
16	5	PAOZZ	5310-00-950-0039	96906	MS21044N6	NUT, SELF-LOCKING, HEXAGON	EA	4
16	6	PAOZZ	5310-00-087-7493	96906	MS27183-13	WASHER, FLAT	EA	4
16	7	XBOZZ		97403	13225E8098-1	SHIM	EA	v
16	8	XBOZZ		97403	13225E8098-2	SHIM	EA	v
16	9	AOOOO		97403	13225E8059	CONDENSER MOTOR AND FAN ASSEMBLY ..... DMD	EA	1
16	10	PAOOO	4140-01-160-3922	97403	13225E8082	IMPELLER, FAN, CENTRIFUGAL CLOCKWISE	EA	1
16	11	PAOZZ	5305-00-054-9266	96906	MS51955-21	SETSCREW	EA	2
16	12	PAOOO	4140-01-160-3923	97403	13225E8083	IMPELLER, FAN, CENTRIFUGAL COUNTER CLOCKWISE	EA	1
16	13	PAOZZ	5305-00-054-9266	96906	MS51955-21	SETSCREW	EA	2
16	14	PAOFF	6105-01-165-6093	97403	13225E8079-1	MOTOR, ALTERNATING CURRENT ..... DMD, EAZ	EA	1
16	14	PAOFF		97403	13225E8079-2	MOTOR, ALTERNATING CURRENT ..... EAY	EA	1
16	15	PAOZZ	5305-01-157-3220	64731	01-006700-002	SCREW TERMINAL BOX COVER	EA	4
16	16	XBOZZ		64731	01-004777-005	COVER, TERMINAL BOX	EA	1
16	17	PAFZZ	5305-00-485-8512	64731	02-009264-004	SCREW, SELF-LOCKING	EA	4
16	18	PAFZZ	5935-00-852-9611	96906	MS3102R18-11P	CONNECTOR, RECEPTACLE	EA	1
16	19	PAFZZ	5305-01-157-3221	64731	01-006716-002	SCREW TERMINAL BOX MOUNTING	EA	2
16	20	XBFZZ		64731	02-014745-00	TERMINAL BOX	EA	1
16	21	PAFZZ	5310-01-157-6733	64731	01-008841-004	NUT	EA	8
16	22	XDFZZ		64731	01-005218-024	STUD, MOTOR	EA	4
16	23	XBFZZ		64731	02-015057-000	END BRACKET, FRONT	EA	1
16	24	PAFZZ	5305-00-492-5523	16941	LPS4N12S10	SCREW, SELF-LOCKING	EA	4
16	25	XBFZZ		64731	02-015067-000	BEARING RETAINER	EA	2
16	26	XBFZZ		64731	02-015058-000	END BRACKET, REAR	EA	1
16	27	PAFZZ	3110-01-147-8178	64731	01-010999-206	BEARING, BALL	EA	2
16	28	PAFZZ	3120-01-098-0496	64731	01-006189-003	BEARING, WASHER, THRUBEARING	EA	1
16	29	PAFZZ	5365-00-229-3510	64731	01-006424-012	SPACER	EA	v
16	30	XAFZZ		64731	01-015121-000	ROTOR WITH SHAFT ..... DMD, EAZ	EA	1
16	30	XAFZZ		64731	01-015667-000	ROTOR WITH SHAFT ..... EAY	EA	1
16	31	XAFZZ		64731	02-015114-001	FRAME WITH WOUND STATOR ..... DMD, EAZ	EA	1
16	31	XAFZZ		64731	A1-021670-000	STATOR/FRAME ASSY ..... EAY	EA	1
16	32	PAOZZ	5305-00-068-0505	96906	MS90726-5	SCREW, CAP, HEXAGON HEAD	EA	8
16	33	XBOZZ		97403	13225E8173	CHANNEL-SUPPORT, CONDENSER MOTOR MOUNT	EA	1

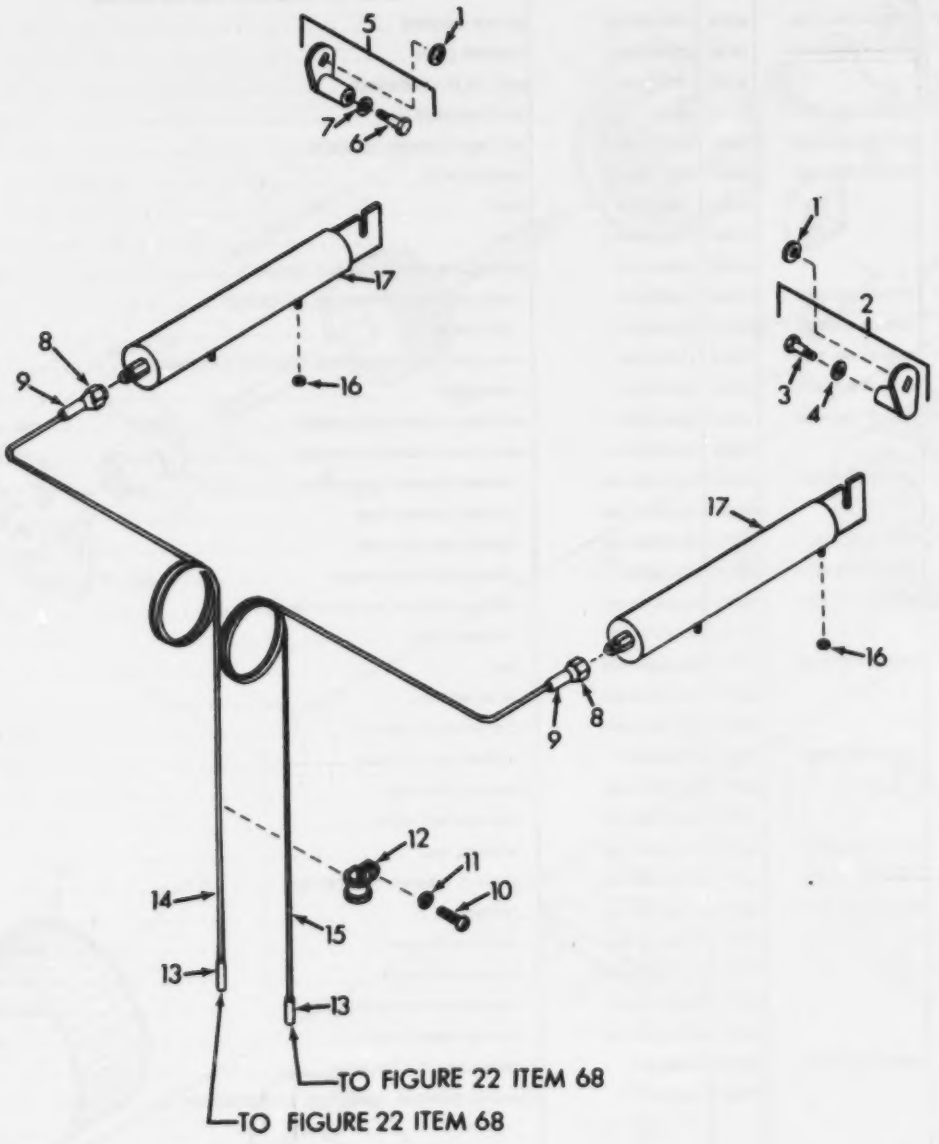

Figure 17. Actuating Cylinders

TS4120-370-24P/17

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06 REFRIGERATION SYSTEM		
17	1	PAFZZ	5310-00-855-1205	97403	13214E6106-1	PUSH ON NUT	EA	2
17	2	XBFFF		97403	13225E0193	LINKAGE ASM, DAMPER-RH	EA	1
17	3	PAFZZ	5306-00-993-2714	80205	NAS1297-3-4	.BOLT,SHOULDER	EA	1
17	4	PAFZZ	5310-00-809-4058	96906	MS27183-10	.WASHER,FLAT	EA	1
17	5	XBFFF		97403	13225E0197	LINKAGE ASM, DAMPER-LH	EA	1
17	6	PAFZZ	5306-00-993-2714	80205	NAS1297-3-4	.BOLT,SHOULDER	EA	1
17	7	PAFZZ	5310-00-809-4058	96906	MS27183-10	.WASHER,FLAT	EA	1
17	8	PAFZZ	4730-00-189-2737	96906	MS35672-2	NUT,TUBE COUPLING	EA	2
17	9	MFFZZ		97403	13225E0210/197	TUBE,COPPER,1/4 OD, MFD FROM ASTM-B280-1/4OD	EA	2
17	10	PADZZ	5305-00-984-6193	96906	MS35206-245	SCREW,MACHINE	EA	1
17	11	PADZZ	5310-00-045-3299	96906	MS35338-42	WASHER,LOCK,HELICAL	EA	1
17	12	PADZZ	5340-00-209-6301	96906	MS21919DG4	WASHER,LOCK,HELICAL	EA	1
17	13	MFFZZ		97403	13225E0210/196	TUBE,COPPER,1/4 OD, MFD FROM ASTM-B280-1/4OD	EA	2
17	14	MFFZZ		97403	13225E0210/274	TUBE,COPPER,1/8 OD, MFD FROM ASTM-B280-1/8OD	EA	1
17	15	MFFZZ		97403	13225E0210/275	TUBE,COPPER,1/8 OD, MFD FROM ASTM-B280-1/8OD	EA	1
17	16	PAFZZ	5310-00-997-1888	96906	MS35649-2252	NUT,PLAIN,HEXAGON	EA	4
17	17	PAFZZ		97403	13225E0187	CYLINDER, ACTUATING LINE	EA	2

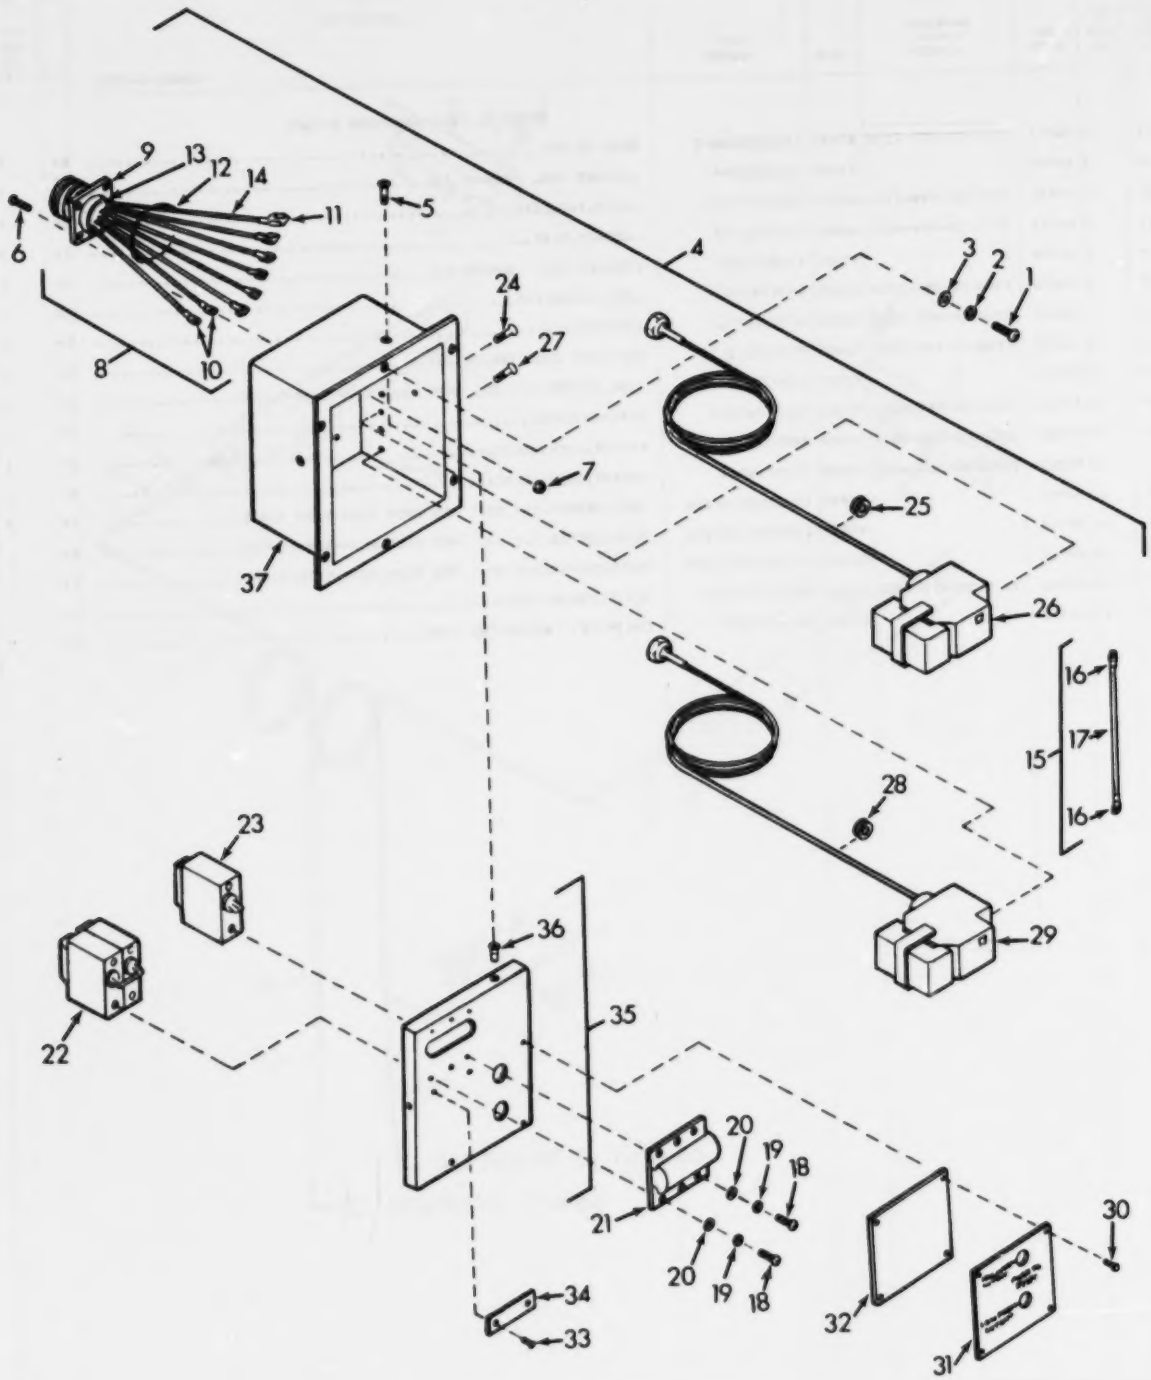

Figure 18. Safety Control Box Assembly

TS4120-370-24P/18

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
18	1	PAOZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	6
18	2	PAOZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK	EA	6
18	3	PAOZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	6
18	4	XBFFF		97403	13225E8137	BOX ASSEMBLY, SAFETY CONTROL DMD, EAZ	EA	1
18	4	XBFFF		97403	13225E8203	BOX ASSEMBLY, SAFETY CONTROL EAY	EA	1
18	5	PAOZZ		96906	MS24693-S50	SCREW, MACHINE	EA	4
18	6	PAOZZ	5305-00-889-2999	96906	MS35206-217	SCREW, MACHINE	EA	4
18	7	PAOZZ	5310-00-889-2543	96906	MS21045-04	NUT, SELF-LOCKING, HEXAGON	EA	4
18	8	XBOOO		97403	13225E8151	WIRING HARNESS, J16 CONNECTOR	EA	1
18	9	PAOZZ	5935-00-814-6769	96906	MS3102R20-7P	CONNECTOR, RECEPTACLE	EA	1
18	10	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	2
18	11	PAOZZ	5940-00-859-4475	97403	13211E8288	TERMINAL, QUICK DISCONNECT	EA	6
18	12	MOOZZ		97403	13225E8151/7	TAPE, IMPREGNATED, SIZE 3, MFD FROM MIL-T-43435TYPE-1-FINISH-B-NO-3	FT	2
18	13	MOOZZ		97403	13225E8151/5	INSULATION, SLEEVING, 1 IN L, MFD FROM M23053/5-105-9	EA	8
18	14	MOOZZ		97403	13225E8151/4	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9	FT	8
18	15	XBOOO		97403	13225E8155-44	LEAD, ELECTRICAL, S5-1 TO S6-2	EA	1
18	16	PAOZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG	EA	2
18	17	MOOZZ		97403	13225E8155/4	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9	FT	1
18	18	PAOZZ	5305-00-984-4984	96906	MS35206-227	SCREW, MACHINE	EA	6
18	19	PAOZZ	5310-00-045-4007	96906	MS35338-41	WASHER, LOCK	EA	6
18	20	PAOZZ	5310-00-082-1404	96906	MS27183-6	WASHER, FLAT	EA	6
18	21	PAOZZ	5925-01-160-3915	97403	13217E6793	COVER, CIRCUIT BREAKER	EA	1
18	22	PAOZZ	5925-01-188-2511	97403	13225E8129-1	CIRCUIT BREAKER DMD, EAZ	EA	1
18	22	PAOZZ		97403	13225E8129-2	CIRCUIT BREAKER EAY	EA	1
18	23	PAOZZ	5925-01-188-2512	97403	13225E8130	CIRCUIT BREAKER	EA	1
18	24	PAOZZ		96906	MS24693-S26	SCREW, MACHINE	EA	2
18	25	PAFZZ		96906	MS35489-3S	GROMMET, NONMETALLIC	EA	1
18	26	PAFZZ	5930-00-275-7800	97403	13211E8404	SWITCH, PRESSURE	EA	1
18	27	PAOZZ		96906	MS24693-S26	SCREW, MACHINE	EA	2
18	28	PAFZZ		96906	MS35489-3S	GROMMET, NONMETALLIC	EA	1
18	29	PAFZZ	5930-00-911-9095	97403	13214E4309	SWITCH, PRESSURE	EA	1
18	30	PAOZZ	5320-00-882-8388	97403	13214E3789-3	RIVET, BLIND	EA	4
18	31	XBOZZ		97403	13225E8131	PLATE, INFORMATION	EA	1
18	32	PAOZZ	5330-01-178-2110	97403	13225E8132	GASKET	EA	1
18	33	PAOZZ	5320-00-882-8388	97403	13214E3789-3	RIVET, BLIND	EA	2
18	34	XBOZZ		97403	13225E8185	PLATE, INFORMATION	EA	1
18	35	XBOOO		97403	13225E8135	PANEL	EA	1
18	36	PAOZZ	5310-00-616-2589	96906	MS27130-S93K	NUT, PLAIN, BLIND RIVET	EA	4
18	37	XBFZZ		97403	13225E8136	HOUSING	EA	1

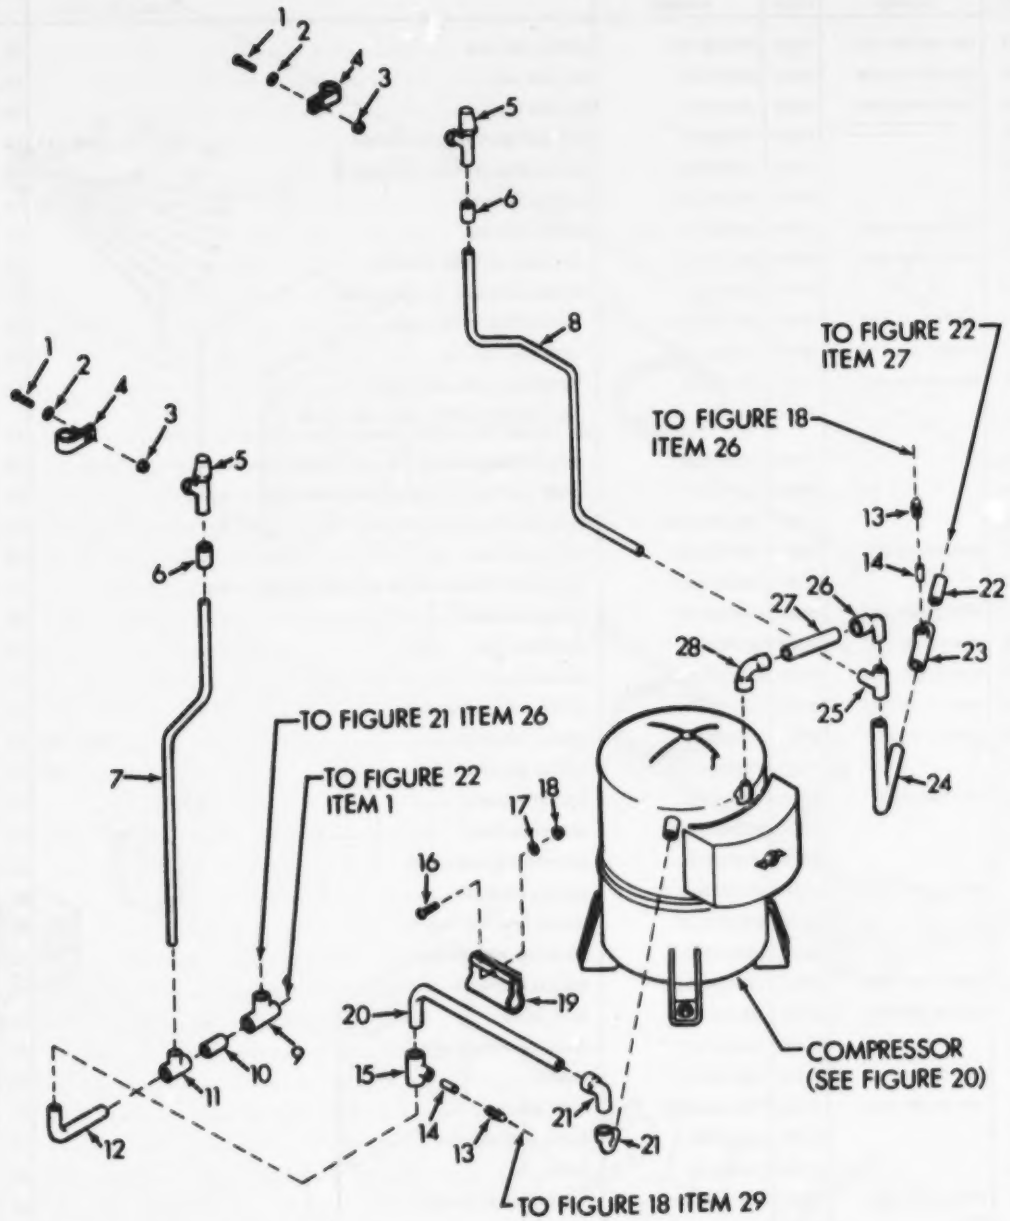

Figure 19. Compressor Piping

TS4120-370-24P/19

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
19	1	PAOZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	2
19	2	PAOZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	2
19	3	PAOZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING, HEXAGON	EA	2
19	4	PAOZZ	5340-00-543-4394	96906	MS21919DG6	CLAMP, LOOP	EA	2
19	5	PAFZZ	4820-00-501-7089	97403	13219E2828	VALVE, ANGLE	EA	2
19	6	PAFZZ	4730-00-264-9153	96906	MS35927-3	COUPLING, TUBE	EA	2
19	7	MFFZZ		97403	13225E8210/182	TUBE, COPPER, 3/8 OD, MFD FROM ASTM-B280-3/80D	EA	1
19	8	MFFZZ		97403	13225E8210/149	TUBE, COPPER, 3/8 OD, MFD FROM ASTM-B280-3/80D	EA	1
19	9	PAFZZ	4730-00-263-6480	41947	W4041	TEE, TUBE	EA	1
19	10	MFFZZ		97403	13225E8210/181	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
19	11	PAFZZ	4730-00-814-8519	41947	W4035	TEE, TUBE	EA	1
19	12	MFFZZ		97403	13225E8210/200	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
19	13	PAFZZ	4730-01-098-5307	96906	MS35919-24	REDUCER, TUBE	EA	2
19	14	MFFZZ		97403	13225E8210/230	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	2
19	15	PAFZZ	4730-00-596-4062	41947	W4034	TEE, TUBE	EA	1
19	16	PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	1
29	17	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	1
19	18	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
19	19	XBFZZ		97403	13216E8038-5	CLAMP	EA	1
19	20	MFFZZ		97403	13225E8210/172	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
19	21	PAFZZ	4730-00-027-0773	96906	MS35928-7	ELBOW, TUBE	EA	2
19	22	MFFZZ		97403	13225E8210/251	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/80D	EA	1
19	23	PAFZZ	4730-00-263-6471	97403	13211E4043-20	TEE, TUBE	EA	1
19	24	MFFZZ		97403	13225E8210/150	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/80D	EA	1
19	25	PAFZZ	4730-00-263-6470	97403	13211E4043-21	TEE, TUBE	EA	1
19	26	PAFZZ	4730-00-813-3193	41947	W2822	ELBOW, TUBE DMD	EA	1
19	26	PAFZZ		96906	MS35928-5	ELBOW, TUBE EAZ, EAY	EA	1
19	27	MFFZZ		97403	13225E8210/145	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/80D	EA	1
19	28	PAFZZ	4730-01-153-7193	97403	13216E6190-4	ELBOW, TUBE DMD	EA	1
19	28	PAFZZ		96906	MS35917-5	ELBOW, TUBE EAZ, EAY	EA	1

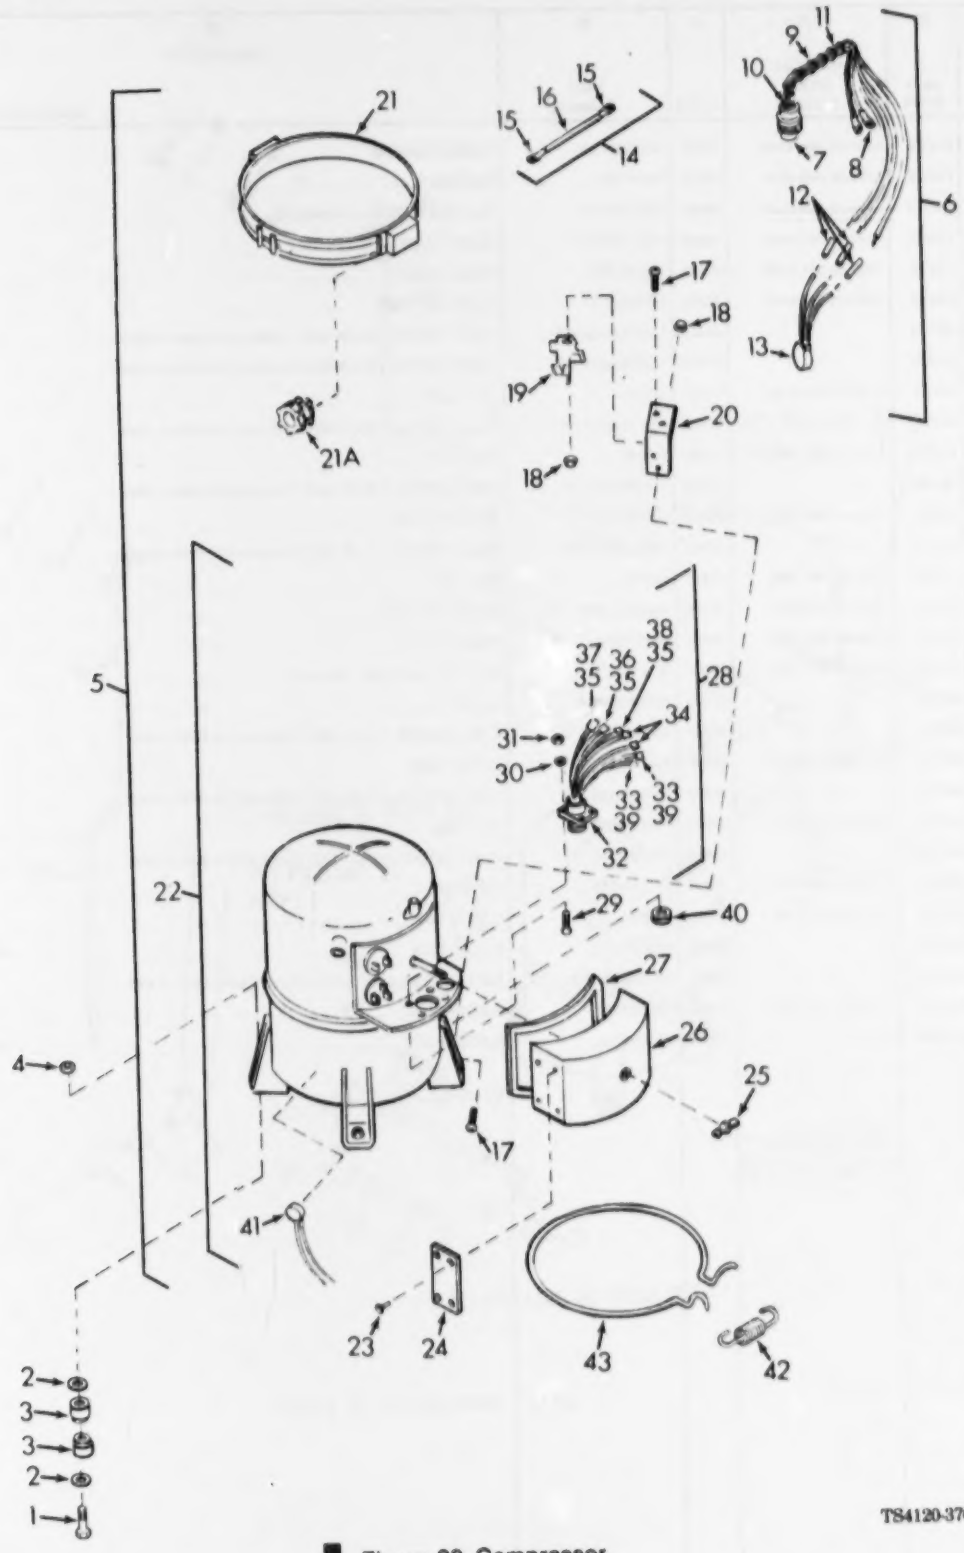

TS4120-370-24P/20

Figure 20. Compressor

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	1	PAFZZ	5306-01-096-2430	97403	13214E3932-1	BOLT, SHOULDER	EA	4
20	2	PAFZZ	5310-01-125-9031	97403	13211E8165-1	WASHER, FLAT	EA	8
20	3	PAFZZ	5310-00-401-3365	97403	13211E8170	WASHER, SHOULDERED	EA	8
20	4	PAFZZ	5310-00-829-9981	96906	MS35649-2312	NUT, PLAIN, HEXAGON	EA	4
20	5	AFFFF		97403	13225E8058	COMPRESSOR ASSEMBLY DMD	EA	1
20	6	XBFFF		97403	13225E8160	WIRING HARNESS, P21 CONNECTOR	EA	1
20	7	PAFZZ	5935-00-819-6057	96906	MS3106R1658P	CONNECTOR, PLUG, ELECTRICAL	EA	1
20	8	PAFZZ	5940-00-143-4780	96906	MS25036-108	TERMINAL, LUG	EA	2
20	9	MFFZZ		97403	13225E8160/8	TAPE, IMPREGNATED, SIZE 3, MFD FROM MIL-T-43435TYPE-1-FINISH-6-ND-3	FT	3
20	10	MFFZZ		97403	13225E8160/4	INSULATION, SLEEVING, 1 IN L, MFD FROM M23053/5-105-9	EA	3
20	11	MFFZZ		97403	13225E8160/2	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9	FT	10
20	12	XBFZZ		81349	MIL-T-7928/3-3	SPLICE, ELECTRICAL	EA	3
20	13	PAFZZ	5930-01-092-1646	97403	13225E8168	SWITCH, THERMOSTATIC	EA	1
20	14	XBFFF		97403	13225E8155-47	LEAD, ELECTRICAL	EA	1
20	15	PAFZZ	5940-00-143-4780	96906	MS25036-108	TERMINAL, LUG	EA	2
20	16	MFFZZ		97403	13225E8155/4	WIRE, ELECTRICAL, AWG 16, MFD FROM M5086/1-16-9	FT	1
20	17	PAFZZ		96906	MS35207-263	SCREW, MACHINE	EA	4
20	18	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	4
20	19	XBFZZ		97403	13226E1495	SUPPORT, TEMPARATURE CONTROL	EA	1
20	20	XBFZZ		97403	13225E8169	ANGLE, TEMPERATURE CONTROL	EA	1
20	21	PAFZZ	4540-01-179-6204	97403	13225E8164	HEATING ELEMENT, ELECTRICAL	EA	1
20	21A	XBFZZ		97403	13226E1497	BUSHING W/LOCK NUT EAZ, EAY	EA	1
20	22	PAFFF	4130-01-097-7843	10855	CA422H-36-208-3	COMPRESSOR UNIT DMD, EAZ	EA	1
20	22	PAFFF		10855	6A38M-169	COMPRESSOR, RECIPROCATING, POWER DRIVEN EAY	EA	1
20	23	XBFZZ		10855	76HC231-1152-2	RIVET	EA	4
20	24	XBFZZ		10855	76HC231-1033-23	NAMEPLATE DMD, EAZ	EA	1
20	24	XBFZZ		10855	76HC231-1033-24	NAMEPLATE EAY	EA	1
20	25	XDFZZ		10855	AT25JA171	NUT, PLAIN, WING	EA	1
20	26	XBFZZ		10855	2RG5241D	COVER, TERMINAL BOX	EA	1
20	27	XDFZZ		10855	7RG5168B	GASKET	EA	1
20	28	XBFFF		10855	76HC232-144-2	WIRE KIT	EA	1
20	29	PAFZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE	EA	4
20	30	PAFZZ	5310-00-045-4007	96906	MS35338-41	WASHER, LOCK	EA	4
20	31	PAFZZ	5310-00-934-9747	96906	MS35649-262	NUT, PLAIN, HEXAGON	EA	4
20	32	PAFZZ	5935-00-847-0568	96906	MS3102R24-11P	CONNECTOR, RECEPTACLE	EA	1
20	33	XBFZZ		10855	7RG5323B	SLEEVE, THERMOSTAT	EA	2
20	34	XBFZZ		10855	7RG5322B	SLEEVE, HEATER	EA	2
20	35	XBFZZ		10855	7RG5322B	SLEEVE, POWER	EA	3
20	36	XBFZZ		10855	99WJ0351KC300512	LEAD, COMMON	EA	1
20	37	XBFZZ		10855	99WH0351KC300412	LEAD, RUN	EA	1
20	38	XBFZZ		10855	99WA0351KC300512	LEAD, START	EA	1
20	39	XBFZZ		10855	99WD0354TC200516	LEAD, THERMOSTAT	EA	2
20	40	XBFZZ		10855	7RA5214A	GROMMET	EA	1
20	41	XDFZZ		14859	20640L15-88-135	SWITCH, THERMOSTATIC	EA	1
20	42	XDFZZ		10855	2RA5049A	SPRING, HELICAL	EA	1
20	43	PAFZZ	4130-01-143-4854	87358	SW1230-21	HEATING ELEMENT, ELECTRICAL	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	40	XBFZZ		10855	7RA5214A	..GROMMET	EA	1
20	41	PAFZZ	5930-01-100-3575	10855	3RG5163B	..SWITCH, THERMOSTATIC	EA	1
20	42	PAFZZ	5360-01-097-2653	10855	2RA5049A	..SPRING,HELICAL	EA	1
20	43	PAFZZ		10855	HT32AZ232	..HEATER,CRANKCASE	EA	1

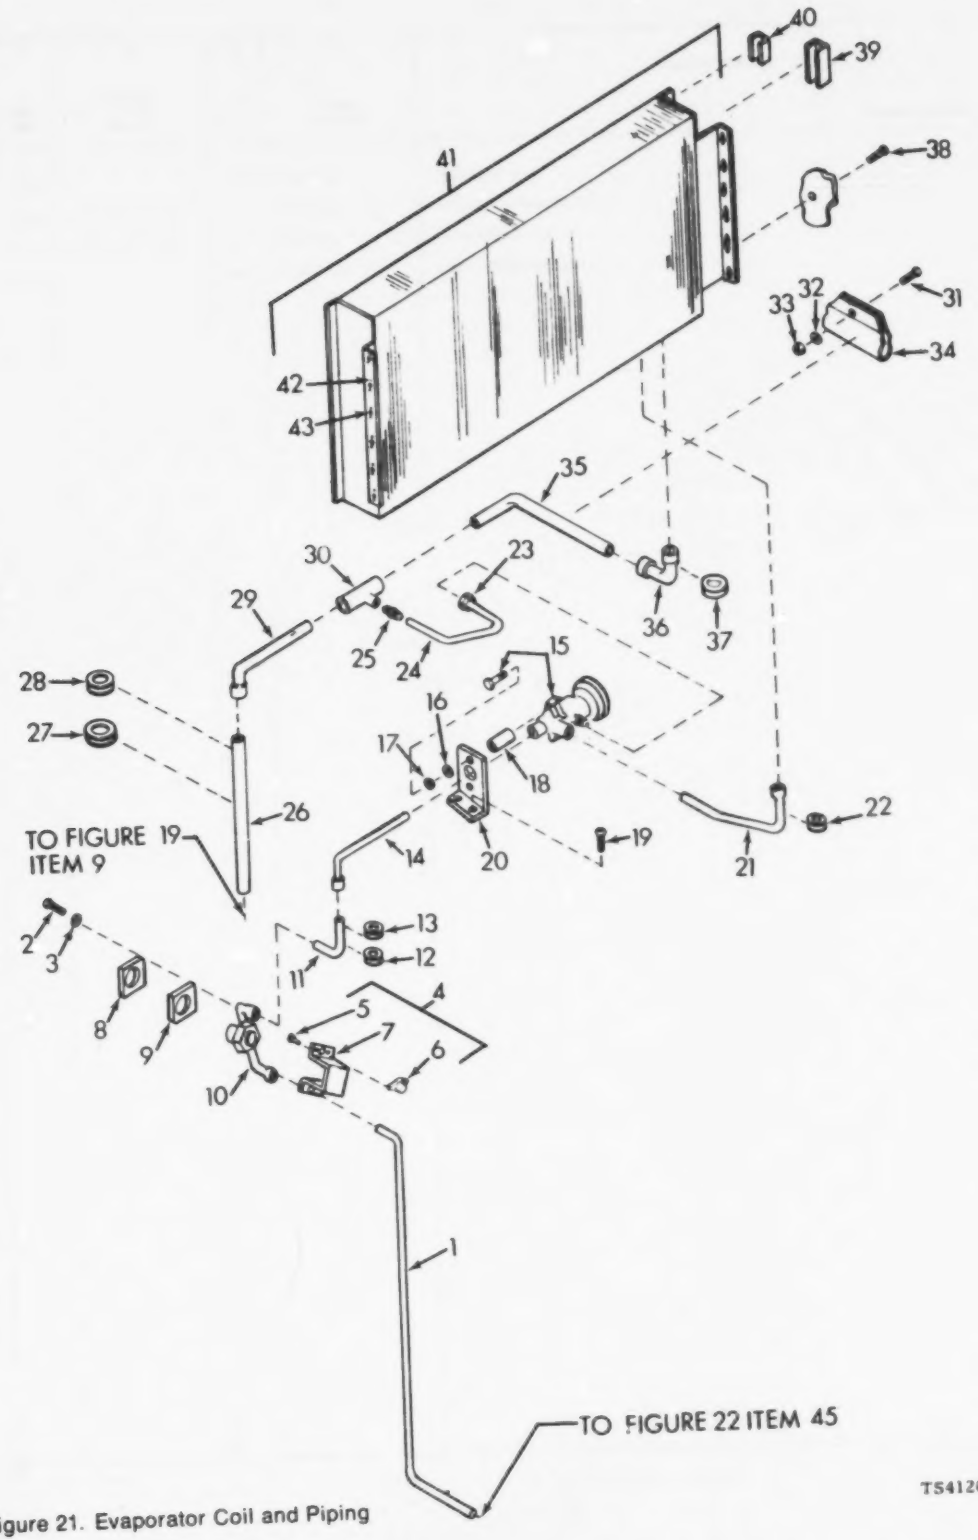

Figure 21. Evaporator Coil and Piping

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	1	MFFZZ		97403	13225E8210/184	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
21	2	PAOZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE	EA	2
21	3	PAFZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT	EA	2
21	4	XBFFF		97403	13216E4536	BRACKET, SIGHT GLASS	EA	1
21	5	PAFZZ	5320-00-323-3984	07707	AK41H	RIVET, BLIND	EA	4
21	6	PAFZZ	5310-00-138-0104	97403	13216E4538-2	NUT, SELF-LOCKING, PLATE	EA	2
21	7	XAFZZ		97403	13216E4536-1	BRACKET	EA	1
21	8	XBFZZ		97403	13211E8242	SPACER	EA	1
21	9	PAFZZ	5330-00-409-3350	97403	13211E8255	GASKET	EA	1
21	10	PAFZZ	6680-01-192-0180	97403	13225E8121	INDICATOR, SIGHT, LIQUID	EA	1
21	11	MFFZZ		97403	13225E8210/210	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
21	12	PAFZZ	5325-00-276-6051	96906	MS35489-101	GROMMET, NONMETALLIC	EA	1
21	13	PAFZZ	5325-00-795-0719	96906	MS35489-43	GROMMET, NONMETALLIC	EA	1
21	14	MFFZZ		97403	13225E8210/211	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
21	15	XDFZZ		97403	13214E4037	VALVE, EXPANSION	EA	1
21	16	PAFZZ	5310-00-087-7493	96906	MS27183-13	WASHER, FLAT	EA	2
21	17	PAFZZ	5310-00-637-9541	96906	MS35338-46	WASHER, LOCK	EA	2
21	18	XBFZZ		97403	13214E4084	SPACER	EA	2
21	19	PAFZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE	EA	2
21	20	XBFZZ		97403	13225E8163	BRACKET	EA	1
21	21	MFFZZ		97403	13225E8210/213	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/80D	EA	1
21	22	PAFZZ	5325-00-185-0001	96906	MS35489-46	GROMMET, NONMETALLIC	EA	1
21	23	PAFZZ	4730-00-189-2737	96906	MS35872-2	NUT, TUBE COUPLING	EA	1
21	24	MFFZZ		97403	13225E8210/212	TUBE, COPPER, 1/4 OD, MFD FROM ASTM-B280-1/40D	EA	1
21	25	PAFZZ	4730-00-905-4268	97403	13211E3799-2	REDUCER, TUBE	EA	1
21	26	MFFZZ		97403	13225E8210/195	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
21	27	PAFZZ	5325-00-290-0074	96906	MS35489-109	GROMMET, NONMETALLIC	EA	1
21	28	PAFZZ	5325-00-171-6387	96906	MS35489-51	GROMMET, NONMETALLIC	EA	1
21	29	MFFZZ		97403	13225E8210/207	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
21	30	PAFZZ	4730-00-596-4062	41947	W4034	TEE, TUBE	EA	1
21	31	PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	1
21	32	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	1
21	33	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
21	34	XBFZZ		97403	13216E8038-5	CLAMP, LOOP	EA	1
21	35	MFFZZ		97403	13225E8210/209	TUBE, COPPER, 7/8 OD, MFD FROM ASTM-B280-7/80D	EA	1
21	36	PAFZZ	4730-00-625-6215	41947	W2734	ELBOW, TUBE DMD	EA	1
21	36	PAFZZ		96906	MS35917-7	ELBOW, TUBE EAZ, EAY	EA	1
21	37	PAFZZ	5325-00-171-6387	96906	MS35489-51	GROMMET, NONMETALLIC	EA	1
21	38	PAFZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	12
21	39	MFFZZ		97403	13225E8114-2	INSULATOR, TUBING, MFD FROM PART NO. X-102	EA	1
21	40	MFFZZ		97403	13225E8114-3	INSULATOR, TUBING, MFD FROM PART NO. X-102	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	41	PBFFF		97403	13225E8087	COIL, EVAPORATOR	EA	1
21	42	PAFZZ	5320-00-117-6939	96906	MS20426AD3-5	.RIVET, SOLID	EA	24
21	43	PAFZZ	5310-00-623-5989	80205	NAS10313A3	NUT,SELF-LOCKING, PLATE	EA	12

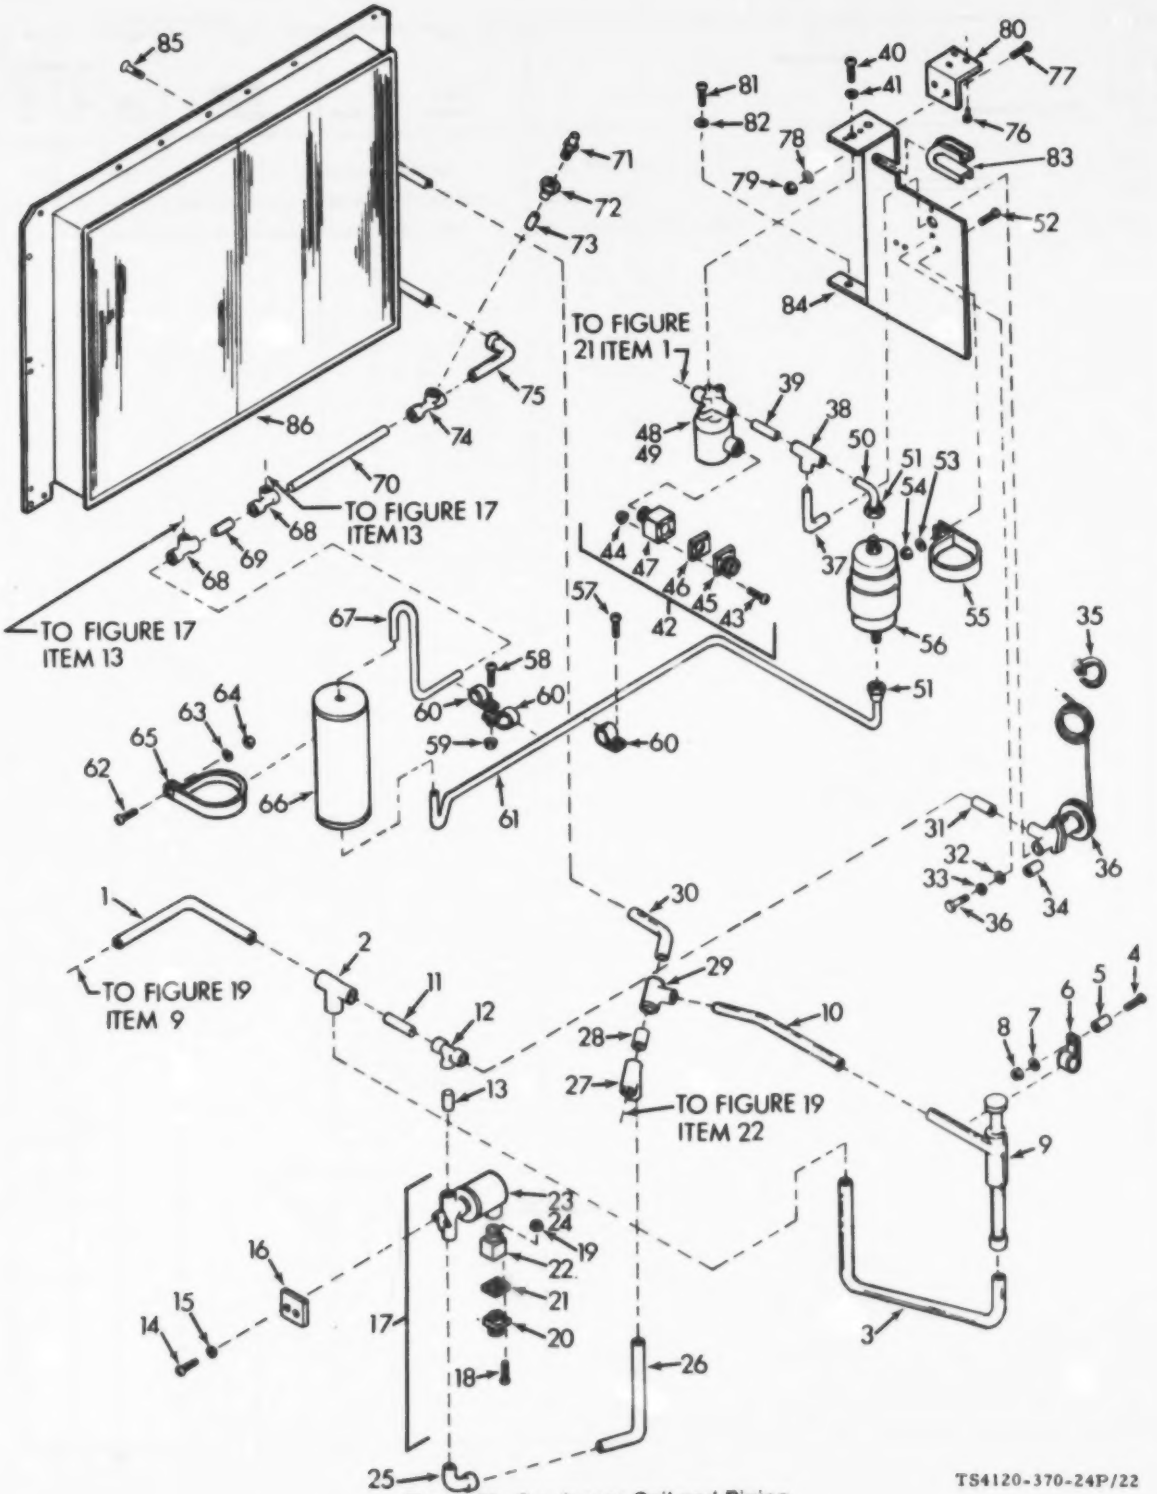

Figure 22. Condenser Coil and Piping

(1) ILLUSTRN		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
22	1	MFFZZ		97403	13225E8210/179	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/8OD	EA	1
22	2	PAFZZ	4730-00-263-6469	41947	W-4009	TEE, TUBE	EA	1
22	3	MFFZZ		97403	13225E8210/157	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/8OD	EA	1
22	4	PAFZZ	5305-00-995-3442	96906	MS35207-268	SCREW, MACHINE	EA	1
22	5	XBFZZ		97403	13214E3372-2	SPACER	EA	1
22	6	PAFZZ	5340-00-565-0004	96906	MS21919DG10	CLAMP, LOOP	EA	1
22	7	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	1
22	8	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
22	9	PAFZZ	4820-00-909-3717	97403	13211E3800	VALVE, REGULATING	EA	1
22	10	MFFZZ		97403	13225E8210/155	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/8OD	EA	1
22	11	MFFZZ		97403	13225E8210/177	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/2OD	EA	1
22	12	PAFZZ	4730-00-263-6465	96906	MS35929-4	TEE, TUBE	EA	1
22	13	MFFZZ		97403	13225E8210/233	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/2OD	EA	1
22	14	PAFZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	2
22	15	PAFZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK	EA	2
22	16	XBFZZ		97403	13225E8152	SPACER	EA	1
22	17	XBFFF		97403	13214E4224-3	WIRING ASSEMBLY, SOLENOID VALVE	EA	1
22	18	PAFZZ	5305-00-984-4979	96906	MS35206-222	SCREW, MACHINE	EA	4
22	19	PAFZZ	5310-00-088-0551	96906	MS21044N04	NUT, SELF-LOCKING, HEXAGON	EA	4
22	20	PAFZZ	5935-00-801-6615	96906	MS3102R12S-3P	CONNECTOR, RECEPTACLE	EA	1
22	21	PAFZZ	5330-00-079-7838	96906	MS51007-3	GASKET	EA	1
22	22	XBFZZ		97403	13214E0696-3	ADAPTER	EA	1
22	23	PAFZZ	4810-00-433-0763	93781	0RS320-24VDC	VALVE, SOLENOID	EA	1
22	24	PAFZZ	4810-01-106-0345	93781	03MP-23-MM-24VDC	COIL AND HOUSING ASSEMBLY	EA	1
22	25	PAFZZ	4730-00-254-6449	97403	13216E6190-3	ELBOW, TUBE . . . . . DAAD	EA	1
22	25	PAFZZ		96906	MS35928-4	ELBOW, TUBE . . . . . EAZ, EAY	EA	1
22	26	MFFZZ		97403	13225E8210/173	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/2OD	EA	1
22	27	PAFZZ	4730-00-263-6471	97403	13211E4043-20	TEE, TUBE	EA	1
22	28	MFFZZ		97403	13225E8210/153	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/8OD	EA	1
22	29	PAFZZ	4730-00-263-6472	96906	MS35929-5	TEE, TUBE	EA	1
22	30	MFFZZ		97403	13225E8210/151	TUBE, COPPER, 5/8 OD, MFD FROM ASTM-B280-5/8OD	EA	1
22	31	MFFZZ		97403	13225E8210/175	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/2OD	EA	1
22	32	PAFZZ	5310-00-087-7493	96906	MS27183-13	WASHER, FLAT	EA	2
22	33	PAFZZ	5310-00-637-9541	96906	MS35338-46	WASHER, LOCK	EA	2
22	34	XBFZZ		97403	13214E4084	SPACER	EA	2
22	35	PAFZZ	5975-00-074-2072	96906	MS3367-1-9	STRAP, TIEDOWN, ELECTRICAL	EA	5
22	36	PAFZZ	4820-01-096-4374	70255	LCL2A MODIFIED	VALVE, EXPANSION	EA	1
22	37	MFFZZ		97403	13225E8210/164	TUBE, COPPER, 3/8 OD, MFD FROM ASTM-B280-3/8OD	EA	1
22	38	PAFZZ	4730-00-203-4922	97403	13211E4043-11	TEE, TUBE	EA	1
22	39	MFFZZ		97403	13225E8210/165	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/2OD	EA	1

(1) ILLUSTRN (a) FIG NO	(1) ILLUSTRN (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
22	40	PAFZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE	EA	2
22	41	PAFZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK	EA	2
22	42	XBFFF-		97403	13214E4224-4	WIRING ASSEMBLY, SOLENOID VALVE	EA	1
22	43	PAFZZ	5305-00-984-4979	96906	MS35206-222	SCREW, MACHINE	EA	4
22	44	PAFZZ	5310-00-088-0551	96906	MS21044N04	NUT, SELF-LOCKING, HEXAGON	EA	4
22	45	PAFZZ	5935-00-801-6615	96906	MS3102R12S-3P	CONNECTOR, RECEPTACLE	EA	1
22	46	PAFZZ	5330-00-079-7838	96906	MS51007-3	GASKET	EA	1
22	47	XBFZZ		97403	13214E0690-3	ADAPTER	EA	1
22	48	PAFZZ	4810-00-433-0763	93781	ORS320-24VDC	VALVE, SOLENOID	EA	1
22	49	PAFZZ	4810-01-106-0345	93781	03MP-23-MM-24VDC	COIL AND HOUSING ASSEMBLY	EA	1
22	50	MFFZZ		97403	13225E8210/162	TUBE, COPPER, 1/2 OD	EA	1
22	51	PAFZZ	4730-00-228-0826	96906	MS35872-4	NUT, TUBE COUPLING	EA	2
22	52	PAFZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	1
22	53	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	1
22	54	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
22	55	PAFZZ	5340-00-842-2134	96906	MS21919WDG46	CLAMP, LOOP CUSHIONED	EA	1
22	56	PAFZZ	4130-00-574-1916	97403	13214E4209	FILTER-DRIER, REFRIGERANT DESICCANT	EA	1
22	57	PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	1
22	58	PAFZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE	EA	1
22	59	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	1
22	60	PAFZZ	5340-00-598-0597	96906	MS21919DG8	CLAMP, LOOP	EA	3
22	61	MFFZZ		97403	13225E8210/190	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
22	62	PAFZZ	5306-00-995-3444	96906	MS35207-266	SCREW, MACHINE	EA	2
22	63	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	2
22	64	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEXAGON	EA	2
22	65	PAFZZ	5340-00-680-3399	96906	MS21919DG50	CLAMP, LOOP CUSHIONED	EA	2
22	66	XBFZZ		97403	13214E4028	RECEIVER, DMD	EA	1
22	66	XBFZZ		97403	13214E3798-4	RECEIVER, EAZ, EAY	EA	1
22	67	MFFZZ		97403	13225E8210/188	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
22	68	PAFZZ	4730-00-821-9184	97403	13211E4043-12	TEE, TUBE	EA	2
22	69	MFFZZ		97403	13225E8210/187	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
22	70	MFFZZ		97403	13225E8210/185	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
22	71	PAFZZ	4820-00-073-8406	97403	13211E8369	VALVE, SAFETY RELIEF	EA	1
22	72	PAFZZ	4730-01-096-9126	96906	MS35921-3-2F	ADAPTER, STRAIGHT	EA	1
22	73	MFFZZ		97403	13225E8210/170	TUBE, COPPER, 3/8 OD, MFD FROM ASTM-B280-3/80D	EA	1
22	74	PAFZZ	4730-00-203-4922	97403	13211E4043-11	TEE, TUBE	EA	1
22	75	MFFZZ		97403	13225E8210/148	TUBE, COPPER, 1/2 OD, MFD FROM ASTM-B280-1/20D	EA	1
22	76	PAFZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND	EA	2
22	77	PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE	EA	1
22	78	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT	EA	1
22	79	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING, HEHEXAGON	EA	1
22	80	XBFZZ		97403	13225E8109	ANGLE	EA	1

TM 5-4120-370-34P

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
22	01	PAFZZ	5305-00-989-7639	96906	MS35207-264	SCREW,MACHINE	EA	2
22	02	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT	EA	2
22	03	MFFZZ		97403	13225E0114-1	INSULATOR,TUBING. MFR FROM PART NO. X-102	EA	1
22	04	XBFZZ		97403	13225E0162	BRACKET	EA	13
22	05	PAGZZ	5305-00-984-7341	96906	MS35191-273	SCREW,MACHINE	EA	1
22	06	PBFZZ		97403	13225E0006	CONDENSER COIL	EA	

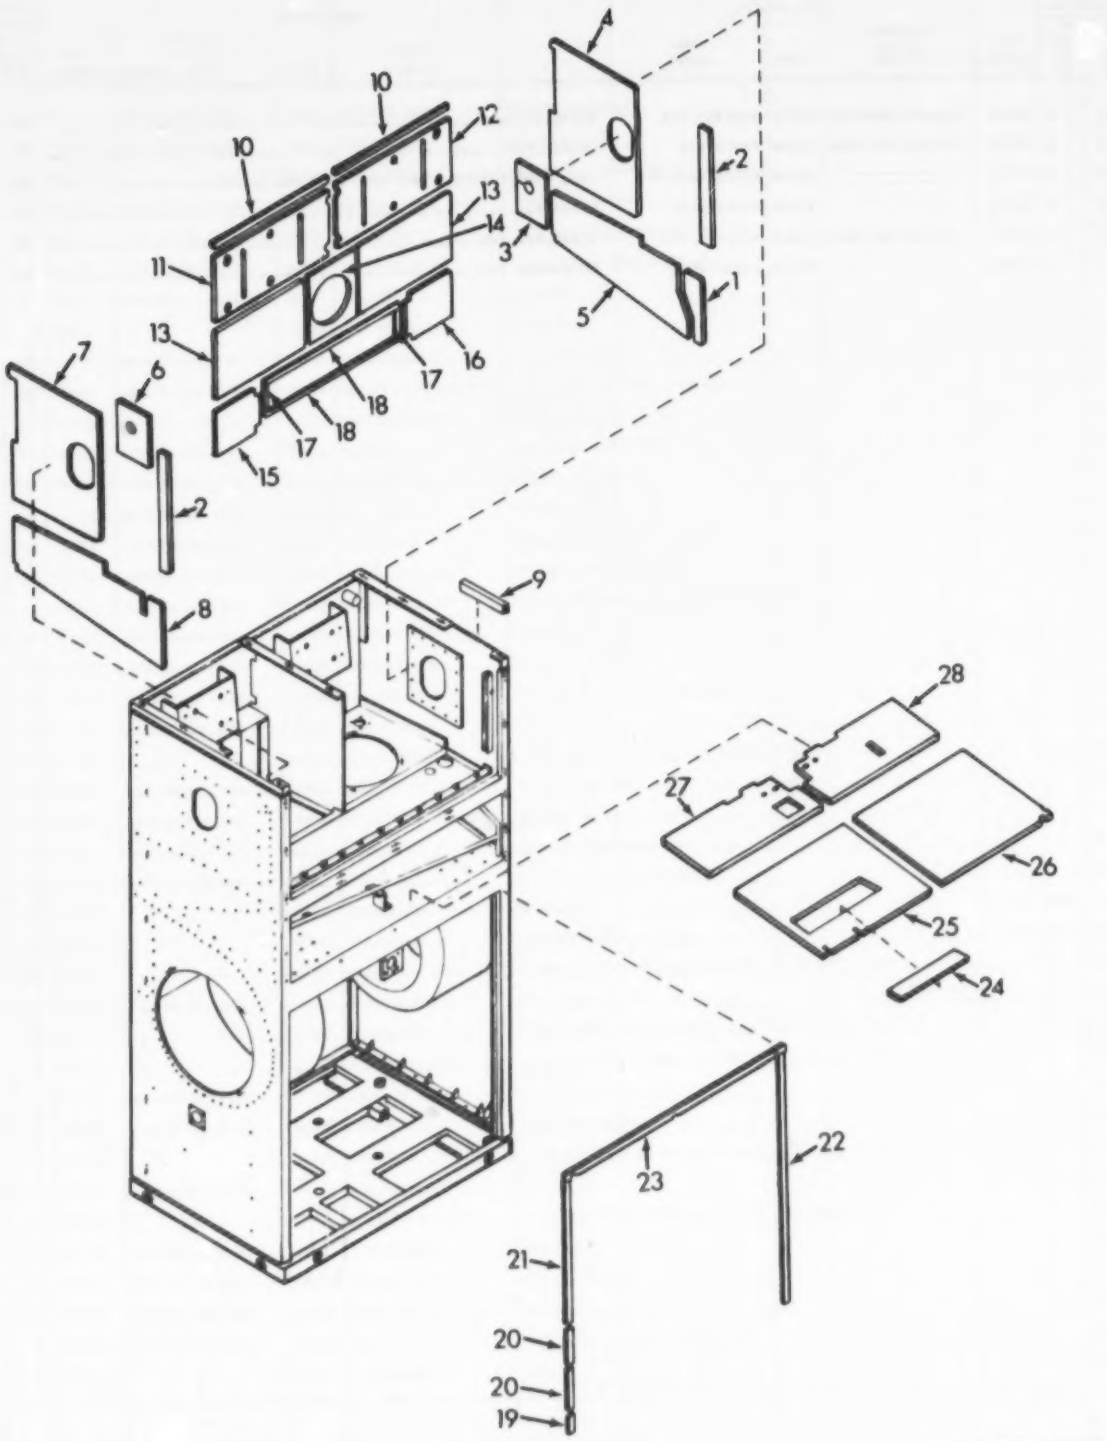

TS4120-370-24P/23

Figure 23. Insulation

SECTION II

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 07 CASING AND BASE		
23	1	MFFZZ		97403	13225E0210/120	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	2	MFFZZ		97403	13225E0210/115	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	2
23	3	MFFZZ		97403	13225E0210/122	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	4	MFFZZ		97403	13225E0210/121	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	5	MFFZZ		97403	13225E0210/119	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	6	MFFZZ		97403	13225E0210/116	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	7	MFFZZ		97403	13225E0210/117	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	8	MFFZZ		97403	13225E0210/118	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	9	MOOZZ		97403	13225E0210/287	GASKET,CHANNEL, 6-1/4 L,MFD FROM PART NO. 83735	EA	2
23	10	MFFZZ		97403	13225E0210/124	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	2
23	11	MFFZZ		97403	13225E0210/123	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	12	MFFZZ		97403	13225E0210/125	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	13	MFFZZ		97403	13225E0210/126	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	2
23	14	MFFZZ		97403	13225E0210/130	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	15	MFFZZ		97403	13225E0210/127	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	16	MFFZZ		97403	13225E0210/131	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	17	MFFZZ		97403	13225E0210/128	GASKET,1/8 THK X 9/16 W X 3-1/8 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	2
23	18	MFFZZ		97403	13225E0210/129	GASKET,1/8 THK X 9/16 W X 17-3/4 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	2
23	19	MFFZZ		97403	13225E0210/281	GASKET,1/8 THK X 3/8 W X 1-9/16 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	1
23	20	MFFZZ		97403	13225E0210/280	GASKET,1/8 THK X 3/8 W X 4-5/16 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	2
23	21	MFFZZ		97403	13225E0210/278	GASKET,1/8 THK X 3/8 W X 15-9/16 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	1
23	22	MFFZZ		97403	13225E0210/279	GASKET,1/8 THK X 3/8 W X 27-1/32 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	1
23	23	MFFZZ		97403	13225E0210/132	GASKET,1/8 THK X 3/8 W X 28 L,MFD FROM ASTM-C-1056-SGE42CP2-1/8	EA	1
23	24	MFFZZ		97403	13225E0210/134	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	25	MFFZZ		97403	13225E0210/135	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	26	MFFZZ		97403	13225E0210/137	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	27	MFFZZ		97403	13225E0210/136	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
23	28	MFFZZ		97403	13225E0210-138	INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1

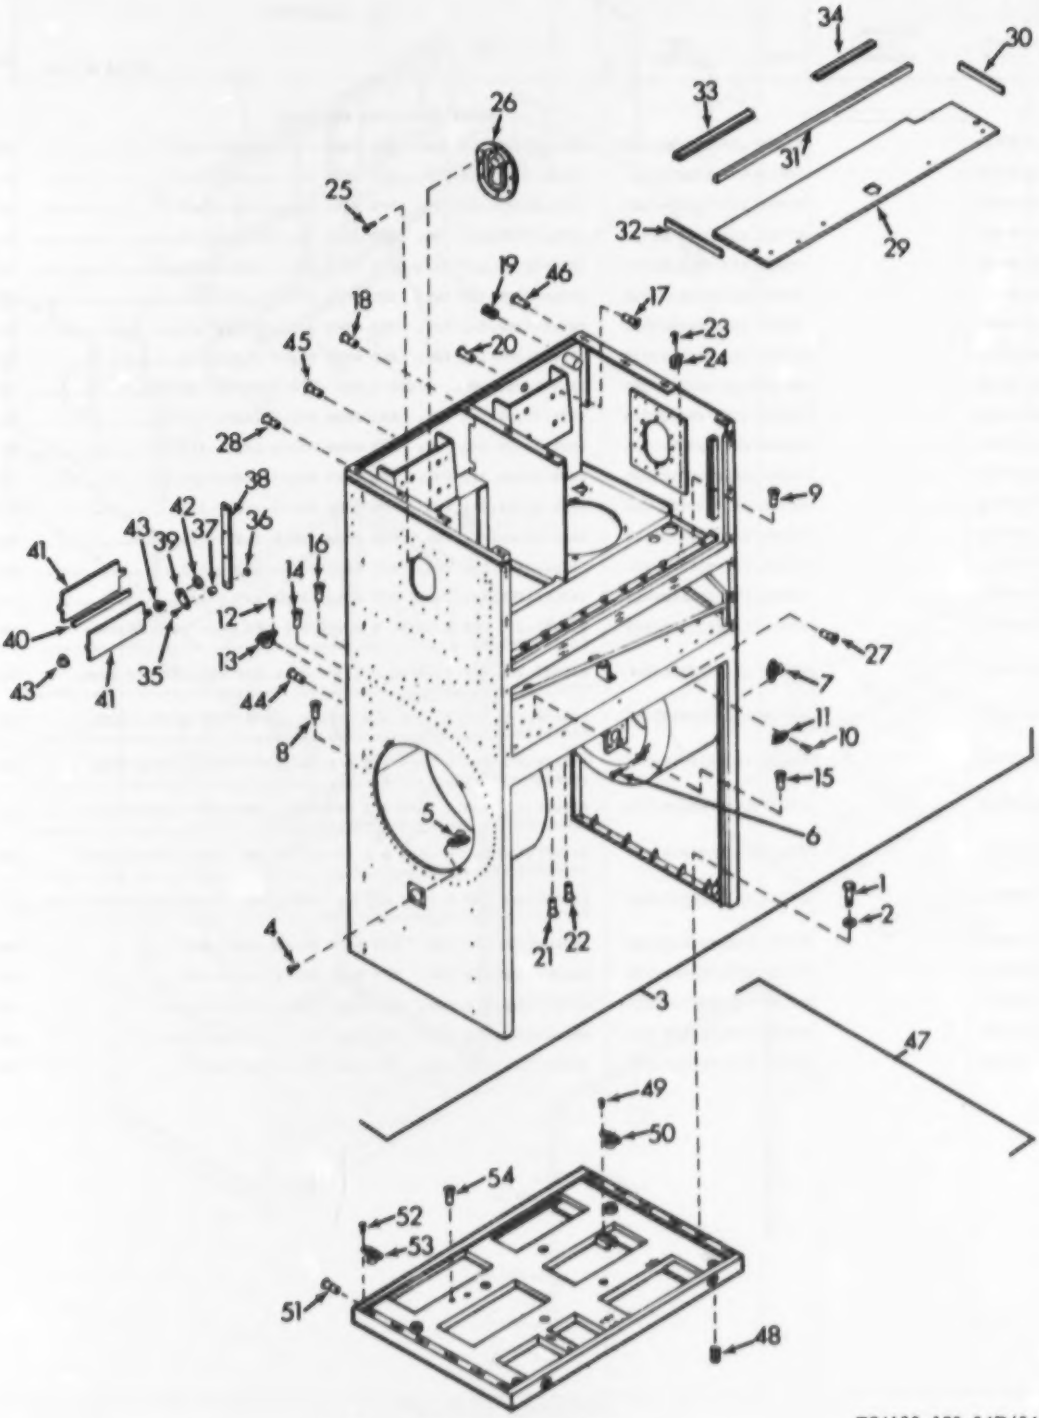

TS4120-370-24P/24

Figure 24. Casing and Base

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
24	1	PAFZZ	5305-00-868-0505	96906	MS90726-5	SCREW,CAP, HEXAGON HEAD	EA	12
24	2	PAFZZ	5310-00-809-4038	96906	MS27183-10	WASHER,FLAT	EA	12
24	3	XBHHH		97403	13221E0062	CASING	EA	1
24	4	PAFZZ	5320-00-117-6939	96906	MS20426AC3-5	.RIVET,SOLID	EA	126
24	5	PAFZZ	5310-00-623-5989	80205	NAS1C31A3	.NUT,SELF-LOCKING, PLATE	EA	63
24	6	PAFZZ	5320-00-117-6939	96906	MS20426AD3-5	.RIVET,SOLID	EA	48
24	7	PAFZZ	5310-00-623-5991	80205	NAS1C31-A08	.NUT,SELF-LOCKING, PLATE	EA	24
24	8	PAFZZ		96906	MS27130S93K	.NUT,BLIND RIVET	EA	6
24	9	PAFZZ		80205	NAS1329H06K875	.NUT,BLIND RIVET	EA	6
24	10	PAFZZ		97403	13214E3791-2	.RIVET,BLIND	EA	8
24	11	PAFZZ	5310-00-089-6304	97403	13213E8382	.NUT,SHEET SPRING	EA	4
24	12	PAFZZ		97403	13214E3791-2	.RIVET,BLIND	EA	16
24	13	PAFZZ	5310-00-138-0104	97403	13214E4538-2	.NUT,SELF-LOCKING, PLATE	EA	8
24	14	PAFZZ		80205	NAS1130H4K8191	.NUT,BLIND RIVET	EA	4
24	15	PAFZZ		80205	NAS1130H5K8116	.NUT,BLIND RIVET	EA	4
24	16	PAFZZ		80205	NAS1130H08K8106	.NUT,BLIND RIVET	EA	2
24	17	PAFZZ		96906	MS27130S106K	.NUT,BLIND RIVET	EA	8
24	18	PAFZZ		80205	NAS1229H5K8200	.NUT,BLIND RIVET	EA	6
24	19	PAHZZ		96906	MS21209C7-20P	.SCREW,INSERT	EA	2
24	20	PAFZZ		80205	NAS1229H3K8100	.NUT,BLIND RIVET	EA	2
24	21	PAFZZ		96906	MS27130S102K	.NUT,BLIND RIVET	EA	4
24	22	PAFZZ	5310-01-067-7916	96906	MS27130-S107K	.NUT,BLIND RIVET	EA	4
24	23	PAFZZ	5320-00-932-1972	97403	13214E3789-2	.RIVET,BLIND	EA	28
24	24	PAFZZ	5340-00-827-2286	78551	C22148-C11-1	.CLIP,SPRING TENSION	EA	14
24	25	PAFZZ		97403	13214E3789-11	.RIVET,BLIND	EA	16
24	26	XBHZZ		97403	13214E4004	.PIPE,ECCH,FLUSH	EA	2
24	27	PAFZZ	5310-01-100-5202	96906	MS27130-S99K	.NUT,BLIND RIVET	EA	43
24	28	PAFZZ		80205	NAS1229H3K8216	.NUT,BLIND RIVET	EA	4
24	29	HFFZZ		97403	13221E0062/21	.INSULATION,1/4 THK, MFD FROM MIL-I-14511-1/4	EA	1
24	30	HFFZZ		97403	13221E0062/54	.INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
24	31	HFFZZ		97403	13221E0062/55	.INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
24	32	HFFZZ		97403	13221E0062/56	.INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
24	33	HFFZZ		97403	13221E0062/67	.INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
24	34	HFFZZ		97403	13221E0062/68	.INSULATION,1/2 THK, MFD FROM MIL-I-14511-1/2	EA	1
24	35	PAHZZ	5320-00-243-8358	96906	MS20470AD2-7	.RIVET,SOLID	EA	8
24	36	PAHZZ	5310-00-087-C097	96906	MS27183-2	.WASHER,FLAT	EA	8
24	37	XBHZZ		97403	13216E8112	.SPACER,SLEEVE	EA	8
24	38	XBHZZ		97403	13221E0124	.CCATOCL,CAMPER	EA	2
24	39	XBHZZ		97403	13221E0123	.ARP,LCUVER BLADE	EA	8

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
24	40	PAHZZ		97403	13225E0042/61	.GASKET,1/8 THK X 1/4 W X 6-7/8 L,MFD PREP ASTP-C-1056-SD042CF2-1/8	EA	6
24	41	XBHZZ		97403	13225E0129	.PLATE,BUMPER	EA	8
24	42	PAHZZ	5310-00-855-1209	97403	13214E6206-1	.PUSH ON NUT	EA	6
24	43	PAHZZ	4130-01-029-6916	97403	13214E6103-2	.DEFFING, LOUVER BLADE	EA	16
24	44	PAFZZ	5310-01-124-0916	96906	MS27130-527R	.NUT,BLIND RIVET	EA	6
24	45	PAFZZ	5310-00-958-5321	96906	MS27130526R	.NUT,BLIND RIVET	EA	6
24	46	PAFZZ		80205	NAS1329W3KR130	.NUT,BLIND RIVET	EA	4
24	47	XBHHH		97403	13225E0088	PANEL,BOTTOM	EA	1
24	48	PAHZZ		96906	MS21209C7-10P	.INSERT,SCREW THREAD	EA	4
24	49	PAHZZ	5320-00-117-6939	96906	MS20426AD3-5	.PIVET,SOLID	EA	12
24	50	PAHZZ	5310-00-623-5989	80205	NAS1031A3	.NUT,SELF-LOCKING, PLATE	EA	6
24	51	PAHZZ		80205	NAS1230H3KR166	.NUT,BLIND RIVET	EA	10
24	52	PAHZZ	5320-00-584-6672	96906	MS20426AD3-6	.PIVET,SOLID	EA	24
24	53	PAHZZ	5310-00-777-5795	96906	MS21C59L4	.NUT,SELF-LOCKING, PLATE	EA	12
24	54	PAHZZ		80205	NAS1230H08R8161	.NUT,BLIND RIVET	EA	2

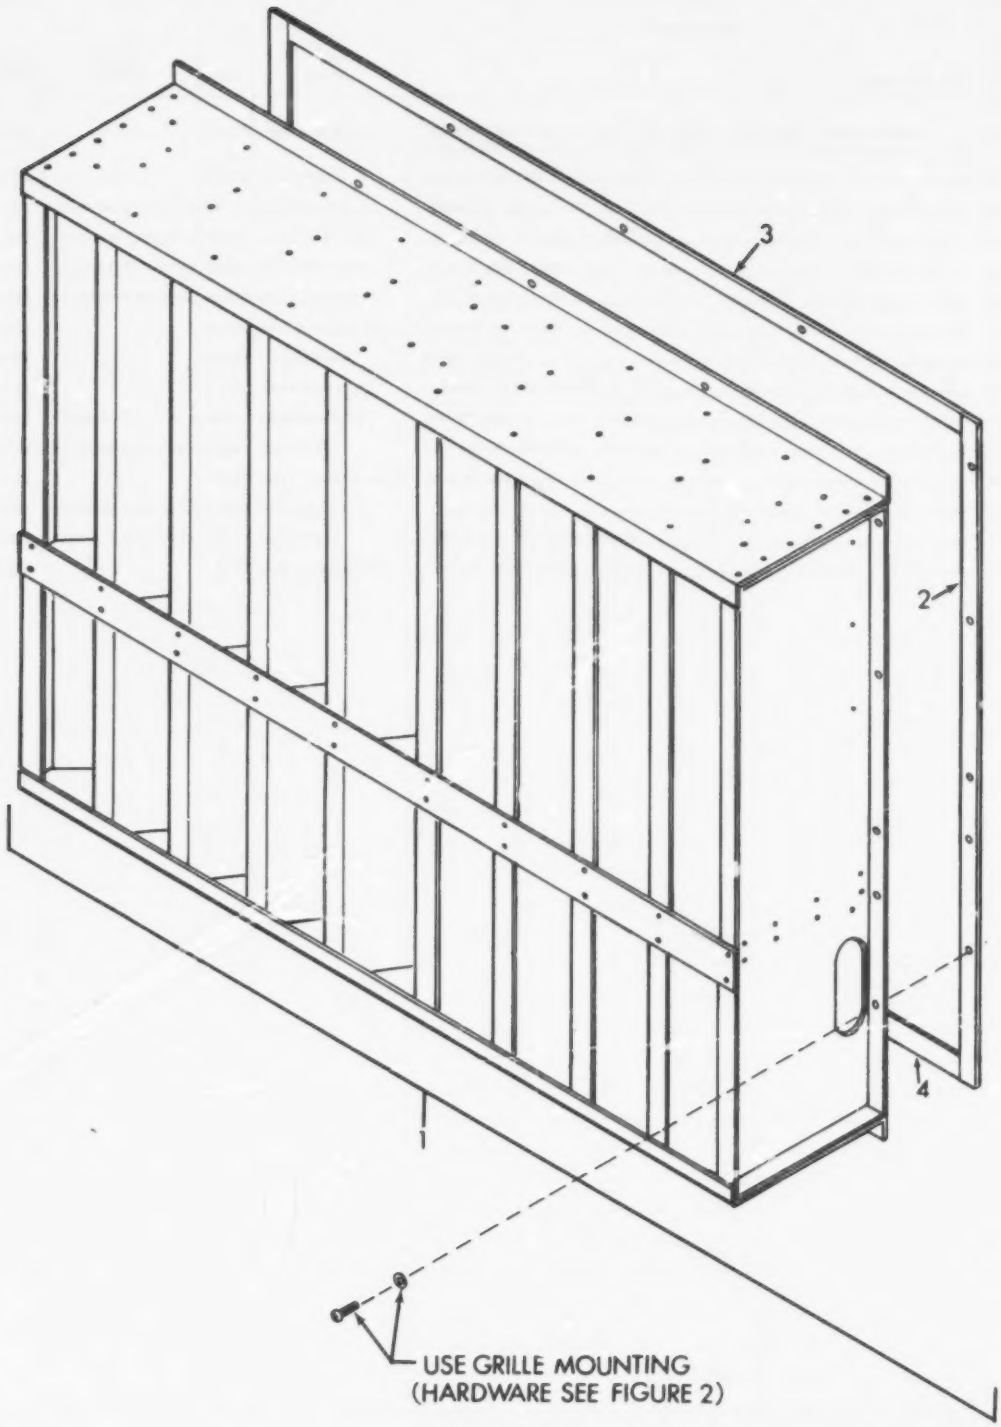

Figure 25. Sound Attenuator

TS4120-370-24P/25

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 08 SOUND ATTENUATOR		
29	1	PFPPP		97403	13214E3885	SOUND ATTENUATOR	EA	1
29	2	MFPZZ		97403	13214E3885/33	.GASKET,1/8 IN THK X 13/16 W X 23-7/16 L,PPD FRCP ASTM-D-1056-SBE42CP2-1/8	EA	2
29	3	MFPZZ		97403	13214E3885/34	.GASKET,1/8 IN THK X 13/16 W X 20-1/8 L,PPD FRCP ASTM-D-1056-SBE42CP2-1/8	EA	1
29	4	MFPZZ		97403	13214E3885/35	.GASKET,1/8 IN THK X 13/16 W X 12-1/16 L,PPD FRCP ASTM-D-1056-SBE42CP2-1/8	EA	2
						GROUP 09 BULK MATERIALS		
BULK	1	PAFZZ	4710-00-424-2694	81348	ASTM-B280-1/2OD	TUBE,COPPER,1/2 OD	FT	V
BULK	2	PAFZZ	4710-00-203-3171	04741	18C9350	TUBE,COPPER,1/4 OD	FT	V
BULK	3	PAFZZ	4710-00-973-8158	81348	WW7735	TUBE,COPPER,1/8 OD	FT	V
BULK	4	PAFZZ	4710-00-203-3172	70334	8113V	TUBE,COPPER,3/8 OD	FT	V
BULK	5	PAFZZ	4710-00-203-3174	16236	CS4710-000468	TUBE,COPPER,5/8 OD	FT	V
BULK	6	PAFZZ	4710-00-277-4528	16236	CS4710-000419	TUBE,METALLIC	FT	V
BULK	7	PADZZ		81348	ASTM-D-1056-SBE42CP2-1/16	GASKET,1/16 IN THK X 40 IN X 70 IN SHEETS	SH	V
BULK	8	PADZZ		81348	ASTM-D-1056-SBE42CP2-1/4	GASKET,1/4 IN THK X 40 IN X 70 IN SHEETS	SH	V
BULK	9	PADZZ		81348	ASTM-D-1056-SBE42CP2-1/8	GASKET,1/8 IN THK X 40 IN X 70 IN SHEETS	SH	V
BULK	10	PADZZ	9640-00-785-7888	81349	MIL-I-14511	INSULATION BOARD, 1/2 IN THK X 54 IN X 84 IN SHEETS	SH	V
BULK	11	PADZZ	9640-01-018-9889	81349	MIL-I-14511	INSULATION BOARD, 1/4 IN THK X 54 IN X 84 IN SHEETS	SH	V
BULK	12	PADZZ	4020-01-100-8581	81349	MIL-T-434358	TAPE,IMPREGNATED, SIZE 3	YD	V
BULK	13	PADZZ	5970-00-082-3942	81349	M23053/5-105-9	INSULATION,SLEEVING	FT	V
BULK	14	PADZZ	5970-00-814-2878	81349	M23053/5-106-9	INSULATION,SLEEVING	FT	V
BULK	15	PADZZ	5970-00-740-2971	81349	M23053/5-107-9	INSULATION,SLEEVING	FT	V
BULK	16	PADZZ	6145-00-003-9527	81349	M5086/1-10-9	WIRE,ELECTRICAL	FT	V
BULK	17	PADZZ	6145-00-578-7521	81349	M5086/1-12-9	WIRE,ELECTRICAL	FT	V
BULK	18	PADZZ	6145-00-578-7516	81349	M5086/1-14-9	WIRE,ELECTRICAL	FT	V
BULK	19	PADZZ	6145-00-578-7517	81349	M5086/1-16-9	WIRE,ELECTRICAL	FT	V
BULK	20	PADZZ	6145-00-284-0457	81349	M5086/2-8-9	WIRE,ELECTRICAL	FT	V
BULK	21	PADZZ	5330-01-129-0385	94833	83735	GASKET	FT	V
BULK	22	PACZZ		87335	EAF-A-1/2-PP-PSA	ACOUSTICAL FOAM, FILM COAT,ADHESIVE BACKING PRODUCT CODE S-404 54 IN X 22.2FT	SH	V
BULK	23	PADZZ	9390-00-519-3337	70485	X1C2	NONMETALLIC CHANNEL, EXTRUDED RUBBER "U" CHANNEL	FT	V

STOCK NUMBER	FIGURE NO.	ITEM NO.
6145-00-003-9527	BULK	10
5310-00-045-2256	1	10
5310-00-045-2256	1	23
5310-00-045-2256	1	31
5310-00-045-2256	3	3
5310-00-045-2256	5	17
5310-00-045-2256	5	34
5310-00-045-2256	7	58
5310-00-045-2256	7	74
5310-00-045-2256	9	2
5310-00-045-2256	11	2
5310-00-045-2256	12	30
5310-00-045-2256	18	2
5310-00-045-3259	3	8
5310-00-045-3259	8	9
5310-00-045-3299	16	2
5310-00-045-3299	17	11
5310-00-045-3299	22	15
5310-00-045-3299	22	41
5310-00-045-4007	12	2
5310-00-045-4007	18	19
5310-00-045-4007	20	34
5305-00-054-5266	16	11
5305-00-054-5266	16	13
5305-00-059-4568	18	9
5305-00-060-5828	2	50
5310-00-061-7325	4	15
5310-00-061-7325	4	36
5310-00-061-7326	4	45
5310-00-061-7326	5	2
5310-00-061-7326	5	8
5310-00-061-7326	5	21
5310-00-061-7326	7	59
5310-00-061-7326	7	75
5310-00-061-7326	19	18
5310-00-061-7326	20	18
5310-00-061-7326	21	33
5310-00-061-7326	22	8
5310-00-061-7326	22	54
5310-00-061-7326	22	56
5310-00-061-7326	22	64
5310-00-061-7326	22	75
5305-00-063-2503	4	34
5330-00-063-7889	7	4
5305-00-068-0505	16	32
5305-00-068-0505	24	1
5305-00-068-0514	4	10
4820-00-073-8405	22	71
5975-00-074-2072	5	6
5975-00-074-2072	22	35
5330-00-075-7838	22	21
5330-00-075-7838	22	46
5310-00-081-4219	4	41
5310-00-081-4219	13	4
5310-00-081-4219	14	4
5310-00-081-8087	5	9
5310-00-081-8087	9	21
5310-00-081-8087	9	33
5310-00-081-8087	9	43
5310-00-081-8087	9	52
5310-00-081-8087	12	14
5310-00-082-1404	11	5
5310-00-082-1404	12	3
5310-00-082-1404	18	20
5970-00-082-3942	BULK	13
5310-00-087-0057	24	36
5305-00-087-0259	8	10
5310-00-087-7493	16	6
5310-00-087-7493	21	14
5310-00-087-7493	22	32
5340-00-087-9550	22	65
5310-00-088-0551	22	15
5310-00-088-0551	22	44
5310-00-089-0304	12	37
5310-00-089-0304	15	33
5310-00-089-0304	24	11
5340-00-106-0551	5	4
5940-00-114-1305	7	45
5940-00-114-1305	9	47
5320-00-117-0939	2	17
5320-00-117-0939	4	23
5320-00-117-0939	7	88
5320-00-117-0939	12	34
5320-00-117-0939	21	42
5320-00-117-0939	24	4
5320-00-117-0939	24	6
5320-00-117-0939	24	45
5320-00-117-0950	2	43
5320-00-117-0952	4	25
3110-00-126-2696	3	15
3110-00-126-4683	13	26
3110-00-126-4683	14	26
5310-00-138-0104	21	6
5310-00-138-0104	24	13
5340-00-143-0083	5	3
5940-00-143-4774	5	26
5940-00-143-4774	5	32
5940-00-143-4774	9	12
5940-00-143-4774	9	26
5940-00-143-4774	9	37
5940-00-143-4774	9	55
5940-00-143-4774	10	38
5940-00-143-4774	10	41
5940-00-143-4774	10	44
5940-00-143-4774	10	47
5940-00-143-4774	10	50
5940-00-143-4774	10	53
5940-00-143-4774	10	56
5940-00-143-4774	10	59
5940-00-143-4774	10	65
5940-00-143-4774	10	68
5940-00-143-4774	10	95
5940-00-143-4774	10	120
5940-00-143-4774	11	10
5940-00-143-4774	11	15
5940-00-143-4774	11	20
5940-00-143-4774	11	25
5940-00-143-4774	18	10
5940-00-143-4774	18	16
5940-00-143-4777	10	28
5940-00-143-4777	10	30
5940-00-143-4777	10	34
5940-00-143-4780	5	25
5940-00-143-4780	9	13
5940-00-143-4780	9	25
5940-00-143-4780	9	36
5940-00-143-4780	10	14
5940-00-143-4780	10	18
5940-00-143-4780	10	22
5940-00-143-4780	10	86
5940-00-143-4780	10	89
5940-00-143-4780	10	92
5940-00-143-4780	10	96
5940-00-143-4780	10	111
5940-00-143-4780	10	124
5940-00-143-4780	15	2
5940-00-143-4780	15	5
5940-00-143-4780	15	8
5940-00-143-4780	15	12
5940-00-143-4780	20	8
5940-00-143-4780	20	15
5940-00-143-4794	10	27
5940-00-143-4794	10	31
5940-00-143-4794	10	35
5940-00-143-4794	10	71
5940-00-143-4794	10	74
5940-00-143-4794	10	77
5940-00-143-4794	10	99
5940-00-143-4794	10	103
5940-00-143-4794	10	107
5940-00-143-4794	15	20
5940-00-143-5284	7	50
5940-00-143-5284	9	44
5364-00-144-4604	16	4
5310-00-159-7984	20	25
5325-00-171-6387	7	63
5325-00-171-6387	21	28
5325-00-171-6387	21	37
5970-00-173-2385	5	48
5325-00-174-5316	18	25

STOCK NUMBER	FIGURE NO.	ITEM NO.
5325-CC-174-5216	18	28
5305-CC-175-3230	4	2
5325-CC-185-CCCL	21	22
4730-CC-185-2737	17	8
4730-CC-185-2737	21	23
5340-CC-151-4858	7	74
4130-CC-153-8488	3	6
4710-CC-203-3171	BULK	2
4710-CC-203-3172	BULK	4
4710-CC-203-3174	BULK	5
4730-CC-203-4922	22	38
4730-CC-203-4922	22	74
5340-CC-205-8301	17	12
5306-CC-225-5C88	13	4
5306-CC-225-5C88	14	4
4730-CC-228-C826	22	51
5365-CC-229-3510	16	25
5940-CC-230-C515	9	27
5940-CC-230-C515	10	2
5940-CC-230-C515	10	5
5940-CC-230-C515	10	8
5940-CC-230-C515	10	11
5940-CC-230-C515	10	15
5940-CC-230-C515	10	19
5940-CC-230-C515	10	22
5315-CC-234-1156	3	14
5930-CC-236-2351	5	44
5360-CC-240-8526	3	16
5320-CC-243-8358	24	39
5340-CC-253-5335	5	2
4730-CC-254-6449	22	25
5935-CC-26C-3311	9	11
4730-CC-263-6465	22	12
4730-CC-263-6470	19	21
4730-CC-263-6471	19	23
4730-CC-263-6471	22	27
4730-CC-263-6472	22	29
5325-CC-263-6632	5	13
4730-CC-264-5153	19	6
5305-CC-267-8562	4	28
5305-CC-267-8574	4	9
5305-CC-267-8574	13	1
5305-CC-267-8574	14	1
5930-CC-275-78C0	18	26
5325-CC-276-6C51	21	12
4710-CC-277-4528	BULK	6
5940-CC-283-5280	9	24
5940-CC-283-5280	9	56
5940-CC-283-5280	10	62
5940-CC-283-5280	10	8C
5940-CC-283-5280	10	83
5940-CC-283-5280	10	114
5940-CC-283-5280	10	117
5940-CC-283-5280	10	123
5940-CC-283-5280	10	2C
6145-CC-284-C657	BULK	41
5325-CC-286-6C47	5	84
5325-CC-29C-C074	7	27
5325-CC-29C-CC74	21	8
5325-CC-297-5E44	4	34
5320-CC-323-3984	11	36
5320-CC-323-3984	12	5
5320-CC-323-3584	21	31
5310-CC-351-4022	4	4C
5310-CC-351-4022	4	3
5310-CC-401-3365	20	8
5310-CC-407-5566	13	9
5310-CC-407-5566	14	5
5330-CC-409-3350	21	24
5365-CC-411-5285	13	24
5365-CC-411-5285	14	1
4710-CC-424-2654	BULK	22
4810-CC-433-C763	22	48
4810-CC-433-C763	22	5
5950-CC-433-6017	12	1
4130-CC-469-6758	6	14
5935-CC-48C-3752	7	17
5305-CC-485-8512	16	26
4540-CC-488-8617	15	24
5305-CC-492-5523	16	22
5930-CC-498-5895	15	

STOCK NUMBER	FIGURE NO.	ITEM NO.
482C-CC-5C1-7C89	19	5
5356-CC-515-3337	BULK	23
534C-CC-543-4394	5	37
534C-CC-542-4354	19	4
5545-CC-545-6348	12	18
534C-CC-565-CCC4	22	6
413C-CC-574-1516	22	56
5535-CC-578-2742	7	3
6145-CC-578-7516	BULK	18
6145-CC-578-7517	BULK	19
6145-CC-578-7521	BULK	17
5320-CC-582-3523	4	20
5310-CC-582-5565	13	2
5310-CC-582-5565	14	2
5320-CC-584-0672	24	52
5310-CC-584-7800	5	18
534C-CC-598-0597	22	60
5315-CC-619-3275	4	38
5310-CC-623-5585	2	18
5310-CC-623-5585	4	24
5310-CC-623-5585	7	89
5310-CC-623-5585	12	35
5310-CC-623-5585	21	43
5310-CC-623-5585	24	5
5310-CC-623-5585	24	50
5310-CC-623-5991	24	7
5310-CC-637-5541	21	17
5310-CC-637-5541	22	33
5325-CC-641-2800	7	19
5935-CC-646-6664	7	24
5935-CC-682-0565	7	33
5310-CC-685-6855	4	35
5935-CC-686-954C	7	25
5306-CC-722-C393	5	7
5305-CC-724-6795	4	1
5305-CC-724-6795	4	6
5935-CC-725-4152	7	42
5935-CC-725-4638	7	41
5935-CC-726-6437	7	32
5315-CC-730-4572	13	13
5315-CC-730-4572	14	13
997C-CC-740-2571	BULK	15
5935-CC-755-3624	13	15
5935-CC-755-3624	14	15
5310-CC-777-5753	24	53
964C-CC-7E5-78EE	BULK	1C
5325-CC-795-G715	21	13
5935-CC-8CC-7163	9	54
5935-CC-8C1-6615	22	2C
5935-CC-8C1-6615	22	45
5310-CC-8C5-4C5E	4	11
5310-CC-8C5-4C5E	4	29
5310-CC-8C5-4C5E	13	3
5310-CC-8C5-4C5E	14	3
5310-CC-8C5-4C5E	17	4
5310-CC-8C5-4C5E	17	7
5310-CC-8C5-4C5E	24	2
5310-CC-8C9-8544	1	6
5310-CC-8C5-8544	3	9
5310-CC-8C5-8544	13	3C
5310-CC-8C5-8544	14	3C
5310-CC-8C5-8544	15	17
5310-CC-8C5-8544	19	2
5310-CC-8C5-8544	21	3
5310-CC-8C5-8546	1	2
5310-CC-8C5-8546	1	11
5310-CC-8C5-8546	1	17
5310-CC-8C5-8546	1	24
5310-CC-8C5-8546	1	32
5310-CC-8C5-8546	1	38
5310-CC-8C5-8546	2	2
5310-CC-8C5-8546	2	9
5310-CC-8C5-8546	2	15
5310-CC-8C5-8546	2	25
5310-CC-8C5-8546	3	4
5310-CC-8C5-8546	4	44
5310-CC-8C5-8546	5	20
5310-CC-8C5-8546	5	51
5310-CC-8C5-8546	7	57
5310-CC-8C5-8546	7	73

STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-CC-8C9-E546	7	8E
5310-CC-8C9-E546	7	9E
5310-CC-8C9-E546	8	11
5310-CC-8C9-E546	12	2S
5310-CC-8C9-E546	18	2
5310-CC-8C9-E546	19	17
5310-CC-8C9-E546	21	32
5310-CC-8C9-E546	22	7
5310-CC-8C9-E546	22	53
5310-CC-8C9-E546	22	62
5310-CC-8C9-E546	22	78
5310-CC-8C9-E546	22	82
5310-CC-811-3494	12	7
5970-CC-814-2878	BULK	14
5935-CC-814-E769	18	9
5935-CC-816-EE45	15	11
5935-CC-819-E057	20	7
4730-CC-821-5184	22	6E
5945-CC-826-2218	12	21
5935-CC-826-3556	7	31
5935-CC-826-3556	7	62
5340-CC-827-2266	24	24
5310-CC-829-5581	20	4
5305-CC-833-1578	2	51
5340-CC-842-2134	22	55
5935-CC-847-C568	20	32
5935-CC-E5C-C546	9	45
5935-CC-852-5611	14	1E
5935-CC-853-3133	7	6
5935-CC-853-3133	7	7E
5310-CC-855-12C5	17	1
5310-CC-855-12C5	24	42
5940-CC-859-4475	5	24
5940-CC-859-4475	5	33
5940-CC-859-4475	9	14
5940-CC-859-4475	10	104
5940-CC-859-4475	10	10E
5940-CC-859-4475	11	11
5940-CC-859-4475	11	1E
5940-CC-859-4475	11	21
5940-CC-859-4475	11	2E
5940-CC-859-4475	18	11
5930-CC-876-1634	5	4C
5310-CC-877-5757	12	23
5310-CC-877-5757	12	2E
5310-CC-877-5757	12	33
5935-CC-878-E787	9	35
5935-CC-878-7588	7	4C
5310-CC-880-9344	2	49
5310-CC-880-9344	15	2E
5320-CC-882-8388	2	52
5320-CC-882-8388	11	3C
5320-CC-882-8388	15	23
5320-CC-882-8388	15	32
5320-CC-882-8388	18	3C
5320-CC-882-8388	18	33
5310-CC-885-2543	7	21
5310-CC-885-2543	18	7
5310-CC-885-2544	1	43
5310-CC-885-2544	2	3C
5310-CC-885-2544	5	15
5310-CC-885-2544	6	2
5310-CC-885-2544	7	2
5310-CC-885-2544	7	13
5310-CC-885-2544	7	55
5310-CC-885-2544	7	71
5310-CC-885-2549	5	11
5310-CC-885-2549	5	35
5310-CC-885-2549	8	4
5310-CC-885-2549	15	18
5310-CC-885-2549	19	3
5305-CC-885-2999	7	2C
5305-CC-885-2999	18	6
5305-CC-885-3000	1	42
5305-CC-885-3000	2	29
5305-CC-885-3000	5	14
5305-CC-885-3000	6	2
5305-CC-885-3000	7	1
5305-CC-885-3000	7	11
5305-CC-885-3000	7	53

STOCK NUMBER	FIGURE NO.	ITEM NO.
5305-CC-885-3C0C	7	69
5305-CC-885-3C0C	9	7
5305-CC-885-3C0C	9	2C
5305-CC-885-3C0C	9	32
5305-CC-885-3C0C	9	42
5305-CC-885-3000	9	51
5305-CC-885-3C00	20	29
5340-CC-885-8877	7	68
4730-CC-9C5-4268	21	25
4820-CC-9C5-3717	22	9
5930-CC-911-5095	18	29
5961-CC-913-1749	11	6
5310-CC-917-6365	12	17
5310-CC-917-6365	12	20
5320-CC-932-1972	1	13
5320-CC-932-1972	1	26
5320-CC-932-1972	1	28
5320-CC-932-1972	1	45
5320-CC-932-1972	1	47
5320-CC-932-1972	1	49
5320-CC-932-1972	2	32
5320-CC-932-1972	2	34
5320-CC-932-1972	2	45
5320-CC-932-1972	5	46
5320-CC-932-1972	22	76
5320-CC-932-1972	24	23
5310-CC-934-9747	20	31
5310-CC-934-9751	5	19
5310-CC-934-9751	12	31
5310-CC-95C-0C39	16	5
4130-CC-951-0806	3	11
5935-CC-951-5777	7	79
5305-CC-958-0662	12	13
5310-CC-95E-5321	24	45
5305-CC-95E-5453	18	24
5305-CC-95E-5453	18	27
4730-CC-959-2329	3	13
4710-CC-973-8158	BULK	3
5310-CC-983-8483	7	54
5310-CC-983-8483	7	70
5305-CC-984-4979	22	18
5305-CC-984-4979	22	43
5305-CC-984-4984	12	1
5305-CC-984-4984	18	18
5305-CC-984-4988	11	4
5305-CC-984-6191	12	6
5305-CC-984-6191	12	16
5305-CC-984-6191	12	19
5305-CC-984-6193	3	7
5305-CC-984-6193	5	10
5305-CC-984-6193	5	38
5305-CC-984-6193	13	29
5305-CC-984-6193	14	29
5305-CC-984-6193	16	1
5305-CC-984-6193	17	10
5305-CC-984-6193	19	1
5305-CC-984-6193	22	14
5305-CC-984-6193	22	40
5305-CC-984-6194	1	5
5305-CC-984-6194	4	18
5305-CC-984-6194	8	3
5305-CC-984-6194	15	16
5305-CC-984-6194	21	2
5305-CC-984-6194	21	19
5305-CC-984-6221	9	8
5305-CC-984-7341	22	85
5305-CC-989-6265	20	17
5305-CC-989-7434	1	15
5305-CC-989-7434	1	30
5305-CC-989-7434	1	37
5305-CC-989-7434	2	14
5305-CC-989-7434	2	24
5305-CC-989-7434	3	1
5305-CC-989-7434	3	2
5305-CC-989-7434	4	16
5305-CC-989-7434	5	1
5305-CC-989-7434	5	35
5305-CC-989-7434	7	91
5305-CC-989-7434	9	1
5305-CC-989-7434	18	1

STOCK NUMBER	FIGURE NO.	ITEM NO.
5305-00-989-7434	21	28
5305-00-989-7434	22	58
5305-00-989-7435	1	1
5305-00-989-7435	1	10
5305-00-989-7435	4	42
5305-00-989-7435	7	56
5305-00-989-7435	7	72
5305-00-989-7435	7	89
5305-00-989-7435	19	16
5305-00-989-7435	21	31
5305-00-989-7435	22	57
5305-00-989-7435	22	77
5305-00-989-7435	22	81
5305-00-993-1848	11	1
5305-00-993-1851	5	16
5305-00-993-1851	12	29
5305-00-993-1851	12	28
5306-00-993-2714	17	3
5306-00-993-2714	17	6
5305-00-995-3442	22	4
5305-00-995-3444	1	22
5305-00-995-3444	2	1
5305-00-995-3444	2	8
5305-00-995-3444	5	50
5305-00-995-3444	12	22
5305-00-995-3444	22	52
5305-00-995-3444	22	62
5305-00-995-3444	17	16
5310-00-997-1888	13	21
5305-01-009-5611	14	21
5305-01-009-5611	BULK	11
5640-01-018-5889	24	42
4130-01-028-8816	7	52
5340-01-041-9514	7	60
5310-01-047-7916	24	22
9905-01-055-0219	1	29
5305-01-082-2739	13	12
5305-01-082-2739	14	12
5320-01-095-5751	12	10
5935-01-095-6412	7	23
5935-01-095-6414	7	7
5925-01-095-8434	7	15
5306-01-096-2430	20	1
4820-01-096-4274	22	36
5305-01-096-5603	15	27
5310-01-096-6575	11	35
4730-01-096-9126	22	72
5360-01-097-2653	20	42
5330-01-097-3362	20	27
5999-01-097-3411	11	7
5999-01-097-3411	11	33
4130-01-097-7843	20	22
3120-01-098-0496	16	28
473C-01-098-9307	19	13
5925-01-100-0970	12	5
5930-01-100-3575	20	41
5310-01-100-5202	24	27
4020-01-100-8581	BULK	12
4810-01-106-0345	22	24
481C-01-106-0345	22	49
5935-01-112-7304	5	23
5935-01-112-7304	7	63
531C-01-124-0516	24	44
5310-01-125-9031	20	2
533C-01-129-0385	BULK	21
4120-01-142-9785	8	2

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
07707	AK41H	11	34
07707	AK41H	12	36
07707	AK41H	21	5
88044	AN3-4A	5	7
81348	ASTM-B280-1/200	BULK	1
81348	ASTM-D-1056-SBE42CF2-1/16	BULK	7
81348	ASTM-D-1056-SBE42CF2-1/4	BULK	8
81348	ASTM-D-1056-SBE42CF2-1/8	BULK	9
10859	AT25JA171	20	25
10855	CA422M-36-208-3	20	22
16236	CS471C-0004GB	BULK	5
16236	CS471C-0004IH	BULK	6
78553	C22146-017-1	24	24
75237	F3915E-C6	11	35
10855	HT22A2232	20	43
70255	LCL2A MODIFIED	22	36
16941	LP54NC2510	16	24
81349	MIL-I-14511	BULK	10
81349	MIL-I-14511	BULK	11
81349	MIL-T-43435B	BULK	12
81349	MIL-T-7928/3-3	20	12
96906	MS15795-708	5	18
96906	MS20C66-146	13	13
96906	MS20C66-146	14	13
96906	MS20426AD3-5	2	17
96906	MS20426AD3-5	4	23
96906	MS20426AD3-5	7	88
96906	MS20426AD3-5	12	34
96906	MS20426AD3-5	21	42
96906	MS20426AD3-5	24	4
96906	MS20426AD3-5	24	6
96906	MS20426AD3-5	24	49
96906	MS20426AD3-6	24	52
96906	MS20426AD4-5	2	43
96906	MS20426AD4-7	4	25
96906	MS20470AD2-7	24	35
96906	MS20601AD6W4	4	20
96906	MS21044N04	22	19
96906	MS21044N04	22	44
96906	MS21044N06	9	9
96906	MS21044N06	9	21
96906	MS21044N06	9	33
96906	MS21044N06	9	43
96906	MS21044N06	9	52
96906	MS21044NC6	12	14
96906	MS21044NC6	12	7
96906	MS21044NC8	12	23
96906	MS21044N3	12	26
96906	MS21044N3	12	32
96906	MS21044N3	16	5
96906	MS21044N6	7	21
96906	MS21045-04	16	7
96906	MS21045-C4	1	43
96906	MS21045-06	2	30
96906	MS21045-06	5	15
96906	MS21045-C6	6	3
96906	MS21045-C6	7	2
96906	MS21045-06	7	12
96906	MS21045-C6	7	55
96906	MS21045-C6	7	71
96906	MS21045-C6	9	11
96906	MS21045-C8	9	39
96906	MS21045-C8	8	4
96906	MS21045-C8	15	18
96906	PS21045-C8	15	3
96906	MS21045-C8	4	45
96906	MS21045-3	9	2
96906	MS21045-3	9	8
96906	MS21045-3	9	21
96906	MS21045-3	7	59
96906	MS21045-3	7	75
96906	MS21045-3	15	18
96906	MS21045-3	20	18
96906	MS21045-3	21	33
96906	MS21045-3	22	8
96906	MS21045-3	22	54
96906	MS21045-3	22	59
96906	MS21045-3	22	64
96906	MS21045-3	22	79
96906	MS21045-3	4	12
96906	MS21045-4	4	30
96906	MS21045-4	24	53
96906	MS21059L4	9	4
96906	MS21104D10	9	5
96906	MS21104D2		

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.	FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
96906	MS21104D5	9	3	96906	MS25036-154	9	27
96906	MS212C9C7-10P	24	48	96906	MS25036-154	10	2
96906	MS212C9C7-20P	24	19	96906	MS25036-154	10	5
96906	MS21318-14	4	2	96906	MS25036-154	10	8
96906	MS21919DG10	22	6	96906	MS25036-154	10	11
96906	MS21919DG4	17	12	96906	MS25036-154	10	15
96906	MS21919DG6	9	37	96906	MS25036-154	10	19
96906	MS21919DG6	19	4	96906	MS25036-154	10	23
96906	MS21919DG8	22	60	96906	MS25036-157	10	26
96906	MS21919WDG46	22	55	96906	MS25036-157	10	30
96906	MS21919WDG50	22	65	96906	MS25036-157	10	34
96906	MS24192D1	12	18	96906	MS25043-24D	3	3
96906	MS24193D1	12	21	96906	MS27130-S1C7K	24	22
96906	MS24663-155	3	14	96906	MS27130-S27K	24	44
96906	MS24663550	4	34	96906	MS27130-S99K	24	27
96906	MS25C36-1C6	9	24	96906	MS27130S102K	24	21
96906	MS25C36-106	9	56	96906	MS27130S106K	24	17
96906	MS25C36-1C6	10	62	96906	MS27130S26K	24	45
96906	MS25C36-1C6	10	80	96906	MS27130S93K	18	36
96906	MS25C36-106	10	83	96906	MS27130S93K	24	8
96906	MS25C36-106	10	114	96906	MS27183-1C	4	11
96906	MS25C36-106	10	117	96906	MS27183-1C	4	29
96906	MS25C36-106	10	123	96906	MS27183-10	12	3
96906	MS25C36-1C8	5	25	96906	MS27183-10	14	3
96906	MS25C36-1C8	9	13	96906	MS27183-10	17	4
96906	MS25C36-1C8	9	25	96906	MS27183-10	17	7
96906	MS25C36-108	9	36	96906	MS27183-10	24	2
96906	MS25C36-108	10	14	96906	MS27183-12	4	41
96906	MS25C36-108	10	18	96906	MS27183-12	12	6
96906	MS25C36-108	10	22	96906	MS27183-12	14	6
96906	MS25C36-108	10	86	96906	MS27183-13	18	6
96906	MS25C36-108	10	89	96906	MS27183-13	21	16
96906	MS25C36-108	10	92	96906	MS27183-13	22	32
96906	MS25C36-108	10	98	96906	MS27183-2	24	36
96906	MS25C36-108	10	111	96906	MS27183-5	7	54
96906	MS25C36-108	10	124	96906	MS27183-5	7	70
96906	MS25C36-108	15	2	96906	MS27183-6	11	5
96906	MS25C36-108	15	5	96906	MS27183-6	12	3
96906	MS25C36-108	15	8	96906	MS27183-6	18	20
96906	MS25C36-108	15	12	96906	MS27183-7	1	6
96906	MS25C36-108	20	8	96906	MS27183-7	3	9
96906	MS25C36-108	20	15	96906	MS27183-7	13	30
96906	MS25C36-112	10	27	96906	MS27183-7	14	30
96906	MS25C36-112	10	31	96906	MS27183-7	15	17
96906	MS25C36-112	10	35	96906	MS27183-7	15	2
96906	MS25C36-112	10	71	96906	MS27183-7	21	3
96906	MS25C36-112	10	74	96906	MS27183-8	1	2
96906	MS25C36-112	10	77	96906	MS27183-8	1	11
96906	MS25C36-112	10	99	96906	MS27183-8	1	17
96906	MS25C36-112	10	103	96906	MS27183-8	1	24
96906	MS25C36-112	10	107	96906	MS27183-8	1	32
96906	MS25C36-112	15	20	96906	MS27183-8	1	38
96906	MS25C36-115	7	50	96906	MS27183-8	2	2
96906	MS25C36-115	9	48	96906	MS27183-8	2	9
96906	MS25C36-116	7	49	96906	MS27183-8	2	15
96906	MS25C36-116	9	47	96906	MS27183-8	2	25
96906	MS25C36-153	5	26	96906	MS27183-8	3	4
96906	MS25C36-153	5	32	96906	MS27183-8	4	44
96906	MS25C36-153	9	12	96906	MS27183-8	9	20
96906	MS25C36-153	9	26	96906	MS27183-8	9	51
96906	MS25C36-153	9	37	96906	MS27183-8	7	57
96906	MS25C36-153	9	55	96906	MS27183-8	7	73
96906	MS25C36-153	10	38	96906	MS27183-8	7	86
96906	MS25C36-153	10	41	96906	MS27183-8	7	92
96906	MS25C36-153	10	44	96906	MS27183-8	8	11
96906	MS25C36-153	10	47	96906	MS27183-8	12	29
96906	MS25C36-153	10	50	96906	MS27183-8	18	3
96906	MS25C36-153	10	53	96906	MS27183-8	19	17
96906	MS25C36-153	10	56	96906	MS27183-8	21	32
96906	MS25C36-153	10	59	96906	MS27183-8	22	7
96906	MS25C36-153	10	65	96906	MS27183-8	22	53
96906	MS25C36-153	10	68	96906	MS27183-8	22	63
96906	MS25C36-153	10	95	96906	MS27183-8	22	78
96906	MS25C36-153	10	120	96906	MS27183-8	22	82
96906	MS25C36-153	11	10	96906	MS3100R14S-7S	7	25
96906	MS25C36-153	11	15	96906	MS3100R20-15SC	7	24
96906	MS25C36-153	11	20	96906	MS3100R24-22P	7	6
96906	MS25C36-153	11	25	96906	MS3100R24-22P	7	78
96906	MS25C36-153	18	10	96906	MS3100R28-9S	7	31
96906	MS25C36-153	18	16	96906	MS3100R28-9S	7	62

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
96906	MS21CCR28-9SZ	7	15
96906	MS21C2R12S-3P	22	20
96906	MS21C2R12S-3P	22	45
96906	MS21C2R16S-8S	9	54
96906	MS21C2R18-11P	16	18
96906	MS21C2R20-7P	18	9
96906	MS21C2R24-11P	20	22
96906	MS21C2R24-22PX	9	45
96906	MS21C2R28-9SW	9	25
96906	MS21C2R36-14S	9	23
96906	MS21C2R36-14SX	9	11
96906	MS21C6R12S-3S	7	41
96906	MS21C6R14S-7P	13	15
96906	MS21C6R14S-7P	14	15
96906	MS21C6R16S8P	20	7
96906	MS21C6R18-11S	7	42
96906	MS21C6R20-15P	15	11
96906	MS21C6R20-7SC	7	33
96906	MS21C6R24-11S	7	40
96906	MS21C6R24-22SX	7	7
96906	MS21C6R28-9PW	7	14
96906	MS31C6R28-9PZ	7	23
96906	MS31C6R36-14P	7	32
96906	MS31C6R36-14PX	7	39
96906	MS3367-1-9	5	6
96906	MS3367-1-9	22	35
96906	MS35150-236	18	24
96906	MS35150-236	18	27
96906	MS35150-253	18	5
96906	MS35151-273	22	65
96906	MS3526C6-217	7	20
96906	MS3526C6-217	18	6
96906	MS3526C6-222	22	18
96906	MS3526C6-222	22	43
96906	MS3526C6-227	12	1
96906	MS3526C6-227	18	18
96906	MS3526C6-228	11	4
96906	MS3526C6-230	1	42
96906	MS3526C6-230	2	29
96906	MS3526C6-230	5	14
96906	MS3526C6-230	6	2
96906	MS3526C6-230	7	1
96906	MS3526C6-230	7	11
96906	MS3526C6-230	7	53
96906	MS3526C6-230	7	69
96906	MS3526C6-230	9	7
96906	MS3526C6-230	9	20
96906	MS3526C6-230	9	32
96906	MS3526C6-230	9	42
96906	MS3526C6-230	9	51
96906	MS3526C6-230	20	29
96906	MS3526C6-234	5	8
96906	MS3526C6-243	12	6
96906	MS3526C6-243	12	16
96906	MS3526C6-243	12	19
96906	MS3526C6-245	3	7
96906	MS3526C6-245	5	10
96906	MS3526C6-245	5	38
96906	MS3526C6-245	13	29
96906	MS3526C6-245	14	29
96906	MS3526C6-245	16	1
96906	MS3526C6-245	17	10
96906	MS3526C6-245	19	1
96906	MS3526C6-245	22	14
96906	MS3526C6-245	22	46
96906	MS3526C6-246	1	5
96906	MS3526C6-246	4	18
96906	MS3526C6-246	8	3
96906	MS3526C6-246	15	16
96906	MS3526C6-246	21	2
96906	MS3526C6-246	21	19
96906	MS3526C7-231	12	13
96906	MS3526C7-262	20	17
96906	MS35207-263	1	35
96906	MS3526C7-263	1	30
96906	MS3526C7-263	1	37
96906	MS3526C7-263	2	14
96906	MS3526C7-263	2	24
96906	MS3526C7-263	3	1
96906	MS3526C7-263	3	2
96906	MS3526C7-263	4	16
96906	MS3526C7-263	5	1
96906	MS3526C7-263	5	35
96906	MS3526C7-263	7	91
96906	MS3526C7-263	8	1
96906	MS35207-263	18	1
96906	MS35207-263	21	30
96906	MS35207-263	22	58
96906	MS35207-264	1	1
96906	MS35207-264	3	10
96906	MS35207-264	4	43
96906	MS3526C7-264	7	56
96906	MS3526C7-264	7	72
96906	MS3526C7-264	7	85
96906	MS3526C7-264	15	16
96906	MS3526C7-264	21	31
96906	MS3526C7-264	22	57
96906	MS35207-264	22	77
96906	MS3526C7-264	22	81
96906	MS3526C7-265	21	1
96906	MS35207-266	1	22
96906	MS3526C7-266	2	1
96906	MS3526C7-266	2	8
96906	MS35207-266	5	50
96906	MS35207-266	18	22
96906	MS35207-266	22	52
96906	MS3526C7-266	22	62
96906	MS35207-267	5	16
96906	MS35207-267	12	25
96906	MS35207-267	12	28
96906	MS35207-268	22	4
96906	MS3533B-41	12	2
96906	MS3533B-41	18	19
96906	MS3533B-41	20	30
96906	MS3533B-42	3	8
96906	MS3533B-42	8	5
96906	MS3533B-42	18	2
96906	MS3533B-42	17	11
96906	MS3533B-42	22	15
96906	MS3533B-42	22	41
96906	MS3533B-43	1	16
96906	MS3533B-43	1	23
96906	MS3533B-43	1	31
96906	MS3533B-43	2	3
96906	MS3533B-43	5	17
96906	MS3533B-43	5	36
96906	MS3533B-43	7	58
96906	MS3533B-43	7	74
96906	MS3533B-43	9	2
96906	MS3533B-43	11	2
96906	MS3533B-43	12	30
96906	MS3533B-43	18	2
96906	MS3533B-44	13	2
96906	MS3533B-44	14	2
96906	MS3533B-45	13	5
96906	MS3533B-45	14	5
96906	MS3533B-46	21	17
96906	MS3533B-46	22	33
96906	MS35489-1	5	41
96906	MS35489-101	21	12
96906	MS35489-104	3	19
96906	MS35489-109	7	84
96906	MS35489-109	21	27
96906	MS35489-2	18	25
96906	MS35489-2	18	28
96906	MS35489-43	21	13
96906	MS35489-46	21	22
96906	MS35489-51	7	83
96906	MS35489-51	21	28
96906	MS35489-51	21	37
96906	MS35489-6	5	13
96906	MS35649-2252	17	16
96906	MS35649-2312	20	4
96906	MS35649-262	20	31
96906	MS35650-302	5	19
96906	MS35650-302	12	31
96906	MS35790-9	4	35
96906	MS35872-2	17	8
96906	MS35872-2	21	23
96906	MS35872-4	22	51

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
96906	MS35519-24	19	13
96906	MS35521-3-2P	22	72
96906	MS35527-3	19	6
96906	MS35529-4	22	12
96906	MS35529-5	22	29
96906	MS46005-7	3	19
96906	MS51007-3	22	21
96906	MS51007-3	22	46
96906	MS51007-9	7	4
96906	MS51955-21	16	11
96906	MS51955-21	16	13
96906	MS51964-51	4	1
96906	MS51964-51	4	6
96906	MS90376-24R	7	68
96906	MS90376-24Y	7	76
96906	MS90376-28Y	7	92
96906	MS90376-28Y	7	60
96906	MS90724-29	12	17
96906	MS90724-29	12	30
96906	MS90726-33	13	4
96906	MS90726-33	14	4
96906	MS90726-5	16	32
96906	MS90726-5	24	1
96906	MS90726-8	4	9
96906	MS90726-8	13	1
96906	MS90726-8	14	1
96906	MS90727-10	4	28
96906	MS90727-7	4	10
96906	MS9122-05	8	10
81349	M23053/5-105-9	BULK	13
81349	M23053/5-106-9	BULK	14
81349	M23053/5-107-9	BULK	15
81349	M5086/1-10-9	BULK	16
81349	M5086/1-12-9	BULK	17
81349	M5086/1-14-9	BULK	18
81349	M5086/1-16-9	BULK	19
81349	M5086/2-8-9	BULK	20
80205	NAS1021-A08	24	7
80205	NAS1031A3	2	18
80205	NAS1031A3	4	24
80205	NAS1031A3	7	89
80205	NAS1031A3	12	35
80205	NAS1031A3	21	43
80205	NAS1031A3	24	5
80205	NAS1031A3	24	50
80205	NAS1297-3-4	17	3
80205	NAS1297-3-4	17	6
80205	NAS1329H08KB75	24	9
80205	NAS1329H3KB130	24	46
80205	NAS1329H3KB180	24	20
80205	NAS1329H3KB80	11	31
80205	NAS1329H5KB200	24	18
80205	NAS1330H08KB106	24	16
80205	NAS1330H08KB161	24	54
80205	NAS1330H3KB116	24	15
80205	NAS1330H3KB166	24	51
80205	NAS1330H3KB216	24	28
80205	NAS1330H4KB151	24	14
80205	NAS561C3-11	4	38
87335	TAF-E-1/2-AP-PSA	BULK	22
81349	TY391B10	12	24
81348	WT775	BULK	3
70485	3102	BULK	23
93781	CR532C-24VDC	22	23
93781	CR532C-24VDC	22	48
64731	01-CC4777-005	16	16
64731	01-CC5218-024	16	22
64731	C1-CC6189-003	16	28
64731	01-CC6189-016	13	25
64731	C1-CC6189-016	14	25
64731	01-CC6424-009	13	24
64731	01-CC6424-009	14	24
64731	01-CC6424-012	16	29
64731	01-CC6760-002	16	15
64731	01-CC6786-002	16	19
64731	C1-CC8498-031	13	19
64731	01-CC8498-031	14	19
64731	C1-CC8773-080	13	20
64731	01-CC8841-004	16	21
64731	C1-01C999-206	16	27

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
64731	C1-C15119-0C0	12	27
64731	C1-C15119-000	14	27
64731	C1-C15121-0C0	16	30
64731	C1-C6E773-080	14	20
64731	C2-CC5264-001	12	21
64731	C2-CC5264-0C1	14	21
64731	C2-CC5264-002	12	16
64731	C2-CC5264-002	14	16
64731	C2-CC5264-004	16	17
64731	C2-CC9264-017	12	18
64731	C2-CC5264-017	14	18
64731	C2-01C999-203	12	26
64731	C2-01C999-2C3	14	26
64731	C2-013145-001	12	22
64731	C2-013145-001	14	22
64731	C2-013145-002	12	23
64731	C2-013145-002	14	23
64731	C2-014744-000	16	23
64731	C2-014745-000	16	20
64731	C2-C14765-000	12	17
64731	C2-014765-000	14	17
64731	C2-C15057-0C0	16	25
64731	C2-015058-000	16	26
64731	C2-015113-001	13	28
64731	C2-015113-001	14	28
64731	C2-015114-001	16	31
93781	C3MP-23-MM-24VDC	23	24
93781	C2MP-23-MM-24VDC	22	49
04741	10C9350	BULK	2
94222	12-11-205-12	3	51
94222	12-11-611-12	2	50
94833	12577	1	50
97403	13211E3343	2	39
97403	13211E3344	2	38
97403	13211E3751	11	6
97403	13211E3799-2	21	25
97403	13211E3800	22	9
97403	13211E4043-11	22	38
97403	13211E4043-11	22	74
97403	13211E4043-12	22	68
97403	13211E4043-20	15	23
97403	13211E4043-20	22	27
97403	13211E4043-21	15	25
97403	13211E4043-23	22	2
97403	13211E4043-43	15	15
97403	13211E4043-43	21	30
97403	13211E4043-44	15	11
97403	13211E4043-47	15	9
97403	13211E8165-1	20	2
97403	13211E8170	20	3
97403	13211E8242	21	8
97403	13211E8255	21	9
97403	13211E8266	5	12
97403	13211E8288	5	24
97403	13211E8288	5	33
97403	13211E8288	5	14
97403	13211E8288	10	104
97403	13211E8288	10	108
97403	13211E8288	11	11
97403	13211E8288	11	16
97403	13211E8288	11	21
97403	13211E8288	11	26
97403	13211E8288	16	11
97403	13211E83C1-2	5	40
97403	13211E8337	2	49
97403	13211E8337	15	26
97403	13211E8338-2	5	43
97403	13211E8369	22	71
97403	13211E8382	12	37
97403	13211E8382	15	37
97403	13211E8382	24	7
97403	13211E8399C24-225	7	79
97403	13211E8399C28-9P	5	23
97403	13211E8399C28-9P	7	63
97403	13211E8404	18	26
97403	13211E8411	3	15
97403	13211E8412	3	16
97403	13214E0656-3	22	22
97403	13214E0656-3	22	47
97403	13214E3372-2	22	5

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
97403	13214E3471-2	6	4
97403	13214E3471-3	6	5
97403	13214E3647-1	1	4
97403	13214E3744W37	15	27
97403	13214E3762	5	48
97403	13214E3789-10	15	30
97403	13214E3789-11	24	25
97403	13214E3789-2	1	13
97403	13214E3789-2	1	26
97403	13214E3789-2	1	28
97403	13214E3789-2	1	45
97403	13214E3789-2	1	47
97403	13214E3789-2	1	49
97403	13214E3789-2	2	32
97403	13214E3789-2	2	34
97403	13214E3789-2	2	45
97403	13214E3789-2	5	46
97403	13214E3789-2	22	16
97403	13214E3789-2	24	22
97403	13214E3789-3	2	52
97403	13214E3789-3	11	30
97403	13214E3789-3	15	23
97403	13214E3789-3	15	32
97403	13214E3789-3	18	30
97403	13214E3789-3	18	33
97403	13214E3791-2	24	10
97403	13214E3791-2	24	12
97403	13214E3818-6	12	9
97403	13214E3864-1	1	7
97403	13214E3864-1/1	1	9
97403	13214E3864-1/2	1	8
97403	13214E3865-1	6	1
97403	13214E3E74	4	17
97403	13214E3885	25	1
97403	13214E3885/33	25	2
97403	13214E3885/34	25	3
97403	13214E3885/35	25	4
97403	13214E3889	4	5
97403	13214E3922	6	6
97403	13214E3929	2	7
97403	13214E3931	2	3
97403	13214E3931/2	2	4
97403	13214E3931/3	2	5
97403	13214E3931/4	2	6
97403	13214E3932-1	20	1
97403	13214E3936	2	13
97403	13214E3937	2	10
97403	13214E3937/2	2	11
97403	13214E3937/3	2	12
97403	13214E3942	4	19
97403	13214E3942-1	4	27
97403	13214E3942-2	4	26
97403	13214E3954	4	4
97403	13214E3956	4	3
97403	13214E3957	1	48
97403	13214E3972-1	3	6
97403	13214E3981	15	29
97403	13214E4004	24	26
97403	13214E4013	12	27
97403	13214E4028	22	66
97403	13214E4036	15	22
97403	13214E4037	21	15
97403	13214E4053	5	47
97403	13214E4054	5	42
97403	13214E4072-1	15	25
97403	13214E4072-1/1	15	28
97403	13214E4084	21	18
97403	13214E4084	22	34
97403	13214E4129	2	36
97403	13214E4129-1	2	41
97403	13214E4129/5	2	40
97403	13214E4209	22	56
97403	13214E4224-3	22	17
97403	13214E4224-4	22	42
97403	13214E4266	2	46
97403	13214E4278-1	4	8
97403	13214E4309	18	29
97403	13214E4328	1	14
97403	13214E4328	2	35
97403	13214E6499-7	2	37
97403	13216E45C3	4	32
97403	13216E45C4	4	42
97403	13216E45C5	4	31
97403	13216E45C5	4	40
97403	13216E45C6	4	36
97403	13216E45C8	4	46
97403	13216E45IC	4	21
97403	13216E4511	11	3
97403	13216E4512	11	29
97403	13216E4512-1	11	36
97403	13216E4512-2	11	32
97403	13216E4515	11	7
97403	13216E4515	11	33
97403	13216E4516-1	11	9
97403	13216E4516-2	11	14
97403	13216E4516-3	11	19
97403	13216E4516-4	11	24
97403	13216E4516/3	11	12
97403	13216E4516/3	11	17
97403	13216E4516/3	11	22
97403	13216E4516/3	11	27
97403	13216E4517	11	13
97403	13216E4517	11	18
97403	13216E4517	11	23
97403	13216E4517	11	28
97403	13216E4521	11	8
97403	13216E4524	1	27
97403	13216E4529	4	15
97403	13216E4530	4	22
97403	13216E4531	4	33
97403	13216E4535	12	12
97403	13216E4535	14	12
97403	13216E4536	21	4
97403	13216E4536-1	21	7
97403	13216E4538-2	21	6
97403	13216E4538-2	24	13
97403	13216E61C3-2	24	43
97403	13216E61C6-1	17	1
97403	13216E61C6-1	24	42
97403	13216E6112	24	37
97403	13216E6176-6	15	21
97403	13216E6190-3	22	25
97403	13216E6190-4	15	28
97403	13216E62C1-1	5	44
97403	13216E62C5-6	12	5
97403	13216E8C38-5	15	19
97403	13216E8C38-5	21	34
97403	13216E8C40	4	37
97403	13217E5395	2	44
97403	13217E54C4	1	46
97403	13217E54C4	2	33
97403	13217E6353	12	4
97403	13217E6753	18	21
97403	13217E6814	1	29
97403	13217E6816	8	1
97403	13217E6817	8	2
97403	13218E9953	8	7
97403	13218E9954	8	6
97403	13218E9960	12	10
97403	13219E2828	15	5
97403	13221E8288	16	100
97403	13225E8C58	20	5
97403	13225E8C59	18	9
97403	13225E8060	13	10
97403	13225E8062	24	3
97403	13225E8062/21	24	29
97403	13225E8062/54	24	30
97403	13225E8062/55	24	31
97403	13225E8062/56	24	32
97403	13225E8062/61	24	40
97403	13225E8062/67	24	33
97403	13225E8062/68	24	34
97403	13225E8072	7	87
97403	13225E8072-1	7	90
97403	13225E8073	5	9
97403	13225E8074	5	45
97403	13225E8074-1	5	49
97403	13225E8076	8	12
97403	13225E8077	12	33
97403	13225E8078	5	3

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
97403	13225E8C78-1	9	6
97403	13225E8C78/2	9	5
97403	13225E8C78/3	9	4
97403	13225E8C79-1	16	14
97403	13225E8C80-1	13	14
97403	13225E8C80-1	14	14
97403	13225E8081	2	47
97403	13225E8C82	16	10
97403	13225E8C83	16	12
97403	13225E8C84	13	11
97403	13225E8C85	14	11
97403	13225E8086	22	06
97403	13225E8C87	21	41
97403	13225E8C88	24	47
97403	13225E8C89	2	42
97403	13225E8C89-1	2	64
97403	13225E8C89-17	2	53
97403	13225E8C89-18	2	54
97403	13225E8C89-19	2	55
97403	13225E8C89-2	2	62
97403	13225E8C89/13	2	57
97403	13225E8C89/14	2	58
97403	13225E8C89/20	2	59
97403	13225E8C89/22	2	60
97403	13225E8C89/23	2	61
97403	13225E8C89/3	2	56
97403	13225E8C89/4	2	63
97403	13225E8090	2	16
97403	13225E8C90-1	2	23
97403	13225E8C90/3	2	19
97403	13225E8C90/4	2	20
97403	13225E8C90/5	2	21
97403	13225E8090/6	2	22
97403	13225E8C91	1	39
97403	13225E8C91	2	26
97403	13225E8C91-1	1	41
97403	13225E8091-1	2	28
97403	13225E8C91/2	1	40
97403	13225E8091/2	2	27
97403	13225E8C92	4	39
97403	13225E8C93-3	19	26
97403	13225E8C96	13	7
97403	13225E8C96	14	7
97403	13225E8C97	15	31
97403	13225E8C97-1	15	34
97403	13225E8C98-1	16	7
97403	13225E8C98-2	16	8
97403	13225E8098-3	13	8
97403	13225E8C98-3	14	8
97403	13225E8C98-4	13	9
97403	13225E8C98-4	14	9
97403	13225E8099	2	48
97403	13225E8101	1	25
97403	13225E8102	5	52
97403	13225E8103	13	31
97403	13225E8103	14	31
97403	13225E8104	16	3
97403	13225E8105	15	24
97403	13225E8106	3	5
97403	13225E8108	4	7
97403	13225E8109	22	80
97403	13225E8111	3	10
97403	13225E8114-1	22	83
97403	13225E8114-2	21	39
97403	13225E8114-3	21	40
97403	13225E8117	1	12
97403	13225E8119	3	12
97403	13225E8121	21	10
97403	13225E8122	7	93
97403	13225E8123	24	39
97403	13225E8124	24	38
97403	13225E8125	24	41
97403	13225E8128	8	9
97403	13225E8129-1	18	22
97403	13225E8130	18	23
97403	13225E8131	18	31
97403	13225E8132	18	32
97403	13225E8133	1	33
97403	13225E8133-1	1	36
97403	13225E8133/2	1	35
97403	13225E8133/4	1	34
97403	13225E8135	18	35
97403	13225E8136	18	37
97403	13225E8137	18	4
97403	13225E8138	7	5
97403	13225E8138/3	7	10
97403	13225E8138/4	7	9
97403	13225E8138/6	7	8
97403	13225E8139	5	44
97403	13225E8139/2	5	50
97403	13225E8139/4	5	49
97403	13225E8139/6	5	48
97403	13225E814C	5	22
97403	13225E8140/2	5	29
97403	13225E8140/3	5	30
97403	13225E8140/6	5	28
97403	13225E8140/8	5	27
97403	13225E8141	7	22
97403	13225E8141/4	7	28
97403	13225E8141/5	7	29
97403	13225E8141/6	7	27
97403	13225E8141/8	7	26
97403	13225E8142	7	13
97403	13225E8142/3	7	18
97403	13225E8142/5	7	17
97403	13225E8142/7	7	16
97403	13225E8143	7	38
97403	13225E8143/10	7	43
97403	13225E8143/5	7	45
97403	13225E8143/6	7	46
97403	13225E8143/7	7	47
97403	13225E8143/8	7	44
97403	13225E8144	7	30
97403	13225E8144/4	7	36
97403	13225E8144/5	7	37
97403	13225E8144/6	7	35
97403	13225E8144/8	7	34
97403	13225E8145	7	61
97403	13225E8145/3	7	66
97403	13225E8145/4	7	67
97403	13225E8145/5	7	65
97403	13225E8145/7	7	64
97403	13225E8146	7	77
97403	13225E8146/3	7	82
97403	13225E8146/4	7	81
97403	13225E8146/6	7	80
97403	13225E8147	19	10
97403	13225E8147/2	19	15
97403	13225E8147/4	19	14
97403	13225E8147/6	19	13
97403	13225E8148	5	22
97403	13225E8148/2	5	30
97403	13225E8148/3	5	31
97403	13225E8148/6	5	29
97403	13225E8148/8	5	28
97403	13225E8149	5	10
97403	13225E8149/2	5	17
97403	13225E8149/3	5	18
97403	13225E8149/7	5	16
97403	13225E8149/9	5	15
97403	13225E815-46	10	122
97403	13225E8150	5	34
97403	13225E8150/2	5	40
97403	13225E8150/3	5	41
97403	13225E8150/5	5	39
97403	13225E8150/7	5	38
97403	13225E8151	18	8
97403	13225E8151/4	18	14
97403	13225E8151/5	18	13
97403	13225E8151/7	18	12
97403	13225E8152	22	16
97403	13225E8153	17	2
97403	13225E8155-1	10	1
97403	13225E8155-10	10	33
97403	13225E8155-11	10	37
97403	13225E8155-12	10	40
97403	13225E8155-13	10	43
97403	13225E8155-14	10	46
97403	13225E8155-15	10	49
97403	13225E8155-16	10	52

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
97403	13225E0155-17	10	95
97403	13225E0155-18	10	58
97403	13225E0155-19	10	61
97403	13225E0155-2	10	4
97403	13225E0155-20	10	64
97403	13225E0155-21	10	67
97403	13225E0155-22	10	70
97403	13225E0155-23	10	73
97403	13225E0155-24	10	76
97403	13225E0155-25	10	79
97403	13225E0155-26	10	82
97403	13225E0155-27	10	85
97403	13225E0155-28	10	88
97403	13225E0155-29	10	91
97403	13225E0155-3	10	7
97403	13225E0155-30	10	94
97403	13225E0155-31	10	98
97403	13225E0155-32	10	102
97403	13225E0155-33	10	106
97403	13225E0155-34	10	110
97403	13225E0155-36	10	113
97403	13225E0155-37	10	116
97403	13225E0155-38	15	7
97403	13225E0155-39	15	4
97403	13225E0155-4	10	10
97403	13225E0155-40	15	1
97403	13225E0155-41	7	48
97403	13225E0155-43	9	31
97403	13225E0155-44	18	15
97403	13225E0155-45	10	119
97403	13225E0155-47	20	14
97403	13225E0155-5	10	13
97403	13225E0155-6	10	17
97403	13225E0155-7	10	21
97403	13225E0155-8	10	25
97403	13225E0155-9	10	29
97403	13225E0155/1	7	51
97403	13225E0155/2	10	28
97403	13225E0155/2	10	32
97403	13225E0155/2	10	36
97403	13225E0155/2	10	72
97403	13225E0155/2	10	75
97403	13225E0155/2	10	78
97403	13225E0155/2	10	101
97403	13225E0155/2	10	105
97403	13225E0155/2	10	109
97403	13225E0155/3	10	3
97403	13225E0155/3	10	6
97403	13225E0155/3	10	9
97403	13225E0155/3	10	16
97403	13225E0155/3	10	20
97403	13225E0155/3	10	24
97403	13225E0155/3	15	3
97403	13225E0155/3	15	6
97403	13225E0155/3	15	9
97403	13225E0155/4	5	24
97403	13225E0155/4	10	12
97403	13225E0155/4	10	29
97403	13225E0155/4	10	42
97403	13225E0155/4	10	45
97403	13225E0155/4	10	48
97403	13225E0155/4	10	51
97403	13225E0155/4	10	54
97403	13225E0155/4	10	57
97403	13225E0155/4	10	60
97403	13225E0155/4	10	63
97403	13225E0155/4	10	66
97403	13225E0155/4	10	69
97403	13225E0155/4	10	81
97403	13225E0155/4	10	84
97403	13225E0155/4	10	87
97403	13225E0155/4	10	90
97403	13225E0155/4	10	93
97403	13225E0155/4	10	97
97403	13225E0155/4	10	112
97403	13225E0155/4	10	115
97403	13225E0155/4	10	118
97403	13225E0155/4	10	121
97403	13225E0155/4	10	125
97403	13225E0155/4	18	17

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
97403	13225E0155/4	20	16
97403	13225E0156	1	44
97403	13225E0156	2	31
97403	13225E0157	11	5
97403	13225E0158	14	10
97403	13225E0159	1	3
97403	13225E0160	20	6
97403	13225E0160/2	20	11
97403	13225E0160/4	20	10
97403	13225E0160/6	20	9
97403	13225E0161	9	53
97403	13225E0161/2	9	59
97403	13225E0161/4	9	58
97403	13225E0161/6	9	57
97403	13225E0162	22	14
97403	13225E0163	21	20
97403	13225E0164	20	21
97403	13225E0165	12	8
97403	13225E0166	12	12
97403	13225E0167	12	15
97403	13225E0168	20	13
97403	13225E0169	20	20
97403	13225E0170-6	24	34
97403	13225E0171	1	18
97403	13225E0171-1	1	21
97403	13225E0171/2	1	20
97403	13225E0171/4	1	19
97403	13225E0172	19	19
97403	13225E0172/3	19	21
97403	13225E0173	14	33
97403	13225E0177	9	19
97403	13225E0185	18	34
97403	13225E0186	13	11
97403	13225E0187	17	17
97403	13225E0189-1	4	13
97403	13225E0189-2	4	14
97403	13225E0210-138	23	28
97403	13225E0210/115	22	2
97403	13225E0210/116	23	6
97403	13225E0210/117	22	7
97403	13225E0210/118	23	8
97403	13225E0210/119	23	9
97403	13225E0210/120	23	1
97403	13225E0210/121	23	4
97403	13225E0210/122	22	3
97403	13225E0210/123	23	11
97403	13225E0210/124	22	10
97403	13225E0210/125	23	12
97403	13225E0210/126	22	13
97403	13225E0210/127	23	15
97403	13225E0210/128	22	17
97403	13225E0210/129	23	18
97403	13225E0210/130	23	14
97403	13225E0210/131	22	16
97403	13225E0210/132	22	23
97403	13225E0210/134	23	24
97403	13225E0210/135	23	25
97403	13225E0210/136	22	27
97403	13225E0210/137	22	26
97403	13225E0210/145	19	27
97403	13225E0210/148	22	75
97403	13225E0210/149	19	8
97403	13225E0210/150	19	24
97403	13225E0210/151	22	30
97403	13225E0210/153	19	22
97403	13225E0210/152	22	28
97403	13225E0210/155	22	10
97403	13225E0210/157	22	9
97403	13225E0210/162	22	50
97403	13225E0210/164	22	37
97403	13225E0210/165	22	39
97403	13225E0210/170	22	73
97403	13225E0210/172	19	20
97403	13225E0210/173	22	26
97403	13225E0210/175	22	31
97403	13225E0210/177	22	11
97403	13225E0210/179	22	1
97403	13225E0210/181	19	10
97403	13225E0210/182	19	7
97403	13225E0210/184	21	1

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
97403	13225E8210/185	22	70
97403	13225E8210/187	22	69
97403	13225E8210/188	22	67
97403	13225E8210/190	22	61
97403	13225E8210/195	21	26
97403	13225E8210/196	17	13
97403	13225E8210/197	17	9
97403	13225E8210/200	19	12
97403	13225E8210/207	21	29
97403	13225E8210/209	21	35
97403	13225E8210/210	21	11
97403	13225E8210/211	21	14
97403	13225E8210/212	21	24
97403	13225E8210/213	21	21
97403	13225E8210/230	19	14
97403	13225E8210/233	22	13
97403	13225E8210/274	17	14
97403	13225E8210/275	17	15
97403	13225E8210/278	23	21
97403	13225E8210/279	23	22
97403	13225E8210/280	23	20
97403	13225E8210/281	23	19
97403	13225E8210/287	[illegible]	9
97403	13226E1495	20	19
1C855	2RA5049A	20	42
1C855	2RG5241C	20	26
1C855	3RG51638	20	41
54833	54947	2	11
1C855	7RA5214A	20	40
1C855	7RG51688	20	27
1C855	7RG53228	20	34
10855	7RG53228	20	35
10855	7RG53238	20	33
1C855	76HC231-1033-23	20	24
10855	76HC231-1152-2	20	23
1C855	76HC232-144-2	20	28
18E76	8C2214	18	4
70334	E113U	BULB	4
54833	83735	BULB	21
10855	99NA0351KC300512	20	38
1C855	99NC0354TC200516	20	39
10855	99NP0351KC300412	20	37
10855	99NJ0351KC300512	20	36

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

ROBERT M. JOYCE
Major General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-25C, Organizational Maintenance requirements for Environmental Equipment, Air Conditioners: 36,000 BTU, Floor Mounting.

☆ U.S. GOVERNMENT PRINTING OFFICE : 1990 0 - 262-912 (30557)

best copy available

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM (PRINT YOUR UNIT'S COMPLETE ADDRESS)
PFC JOHN DOE
COA, 3d ENGINEER BN
FT. LEONARDWOOD, MO 63108

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 5-4120-370-24P	3 Feb 84	Air Conditioner, Vertical Compact, 36,000 BTU/HR Cooling 28,600 BTU/HR Heating

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
6	2-1 a			In line 6 of paragraph 2-1a the manual states the engine has 6 Cylenders. The engine on my set only has 4 Cylenders. Change the manual to show 4 Cylenders.
B1		4-3		Callout 16 on figure 4-3 is pointing at a bolt. In key to figure 4-3, item 16 is called a shim - Please correct one or the other.
125	line 20			I ordered a gasket, item 19 on figure B-16 by NSN 2910-00-762-3001. I got a gasket but it doesn't fit. Supply says I got what I ordered, so the NSN is wrong. Please give me a good NSN

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
JOHN DOE, PFC (268) 317-7111

SIGN HERE John Doe
JOHN DOE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

DRSTS-M Overprint 1, 1 Nov 80

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

REVERSE OF DA FORM 2028-2 Reverse of DRSTS-M Overprint 2, 1 Nov 80

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
US ARMY TROOP SUPPORT COMMAND
ATTN: DRSTR-MPSI)
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN. . JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 5-4120-370-24P	3 Feb 84	Air Conditioner, Vertical Compact, 36,000 BTU/HR Cooling 28,600 BTU/HR Heating

BE EXACT. PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

DRSTS-M Overprint 2, 1 Nov 80.

P S --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

REVERSE OF DA FORM 2028-2 Reverse of DRSTS-M Overprint 2, 1 Nov 80

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
US ARMY TROOP SUPPORT COMMAND
ATTN: DRSTR-MPSI
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 5-4120-370-24P	3 Feb 84	Air Conditioner, Vertical Compact, 36,000 BTU/HR Cooling 28,600 BTU/HR Heating

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARAGRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

DRSTS-M Overprint 2, 1 Nov 80.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

REVERSE OF DA FORM 2028-2 Reverse of DRSTS-M Overprint 2, 1 Nov 80

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
US ARMY TROOP SUPPORT COMMAND
ATTN: DRSTR-MPSI
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

TEAR ALONG PERFORATED LINE

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 5-4120-370-24P	3 Feb 84	Air Conditioner, Vertical Compact, 36,000 BTU/HR Cooling 28,600 BTU/HR Heating

BE EXACT. PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

DRSTS-M Overprint 2, 1 Nov 80.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2 Reverse of DRSTS-M Overprint 2, 1 Nov 80

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
US ARMY TROOP SUPPORT COMMAND
ATTN: DRSTR-MP(M)
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

TEAR ALONG PERFORATED LINE

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch
1 decimeter = 10 centimeters = 3.94 inches
1 meter = 10 decimeters = 39.37 inches
1 dekameter = 10 meters = 32.8 feet
1 hectometer = 10 dekameters = 328.08 feet
1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain
1 decigram = 10 centigrams = 1.54 grains
1 gram = 10 decigram = .035 ounce
1 dekagram = 10 grams = .35 ounce
1 hectogram = 10 dekagrams = 3.52 ounces
1 kilogram = 10 hectograms = 2.2 pounds
1 quintal = 100 kilograms = 220.46 pounds
1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliters = .34 fl. ounce
1 deciliter = 10 centiliters = 3.38 fl. ounces
1 liter = 10 deciliters = 33.81 fl. ounces
1 dekaliter = 10 liters = 2.64 gallons
1 hectoliter = 10 dekaliters = 26.42 gallons
1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch
1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches
1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch
1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	*To*	*Multiply by*	*To change*	*To*	*Multiply by*
inches	centimeters	2.540	ounce-inches	newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29,573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	newton-meters	1.356	metric tons	short tons	1.102
pound-inches	newton-meters	.11296			

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

PIN : 054746-000